


MPF PRODUCTS INC.

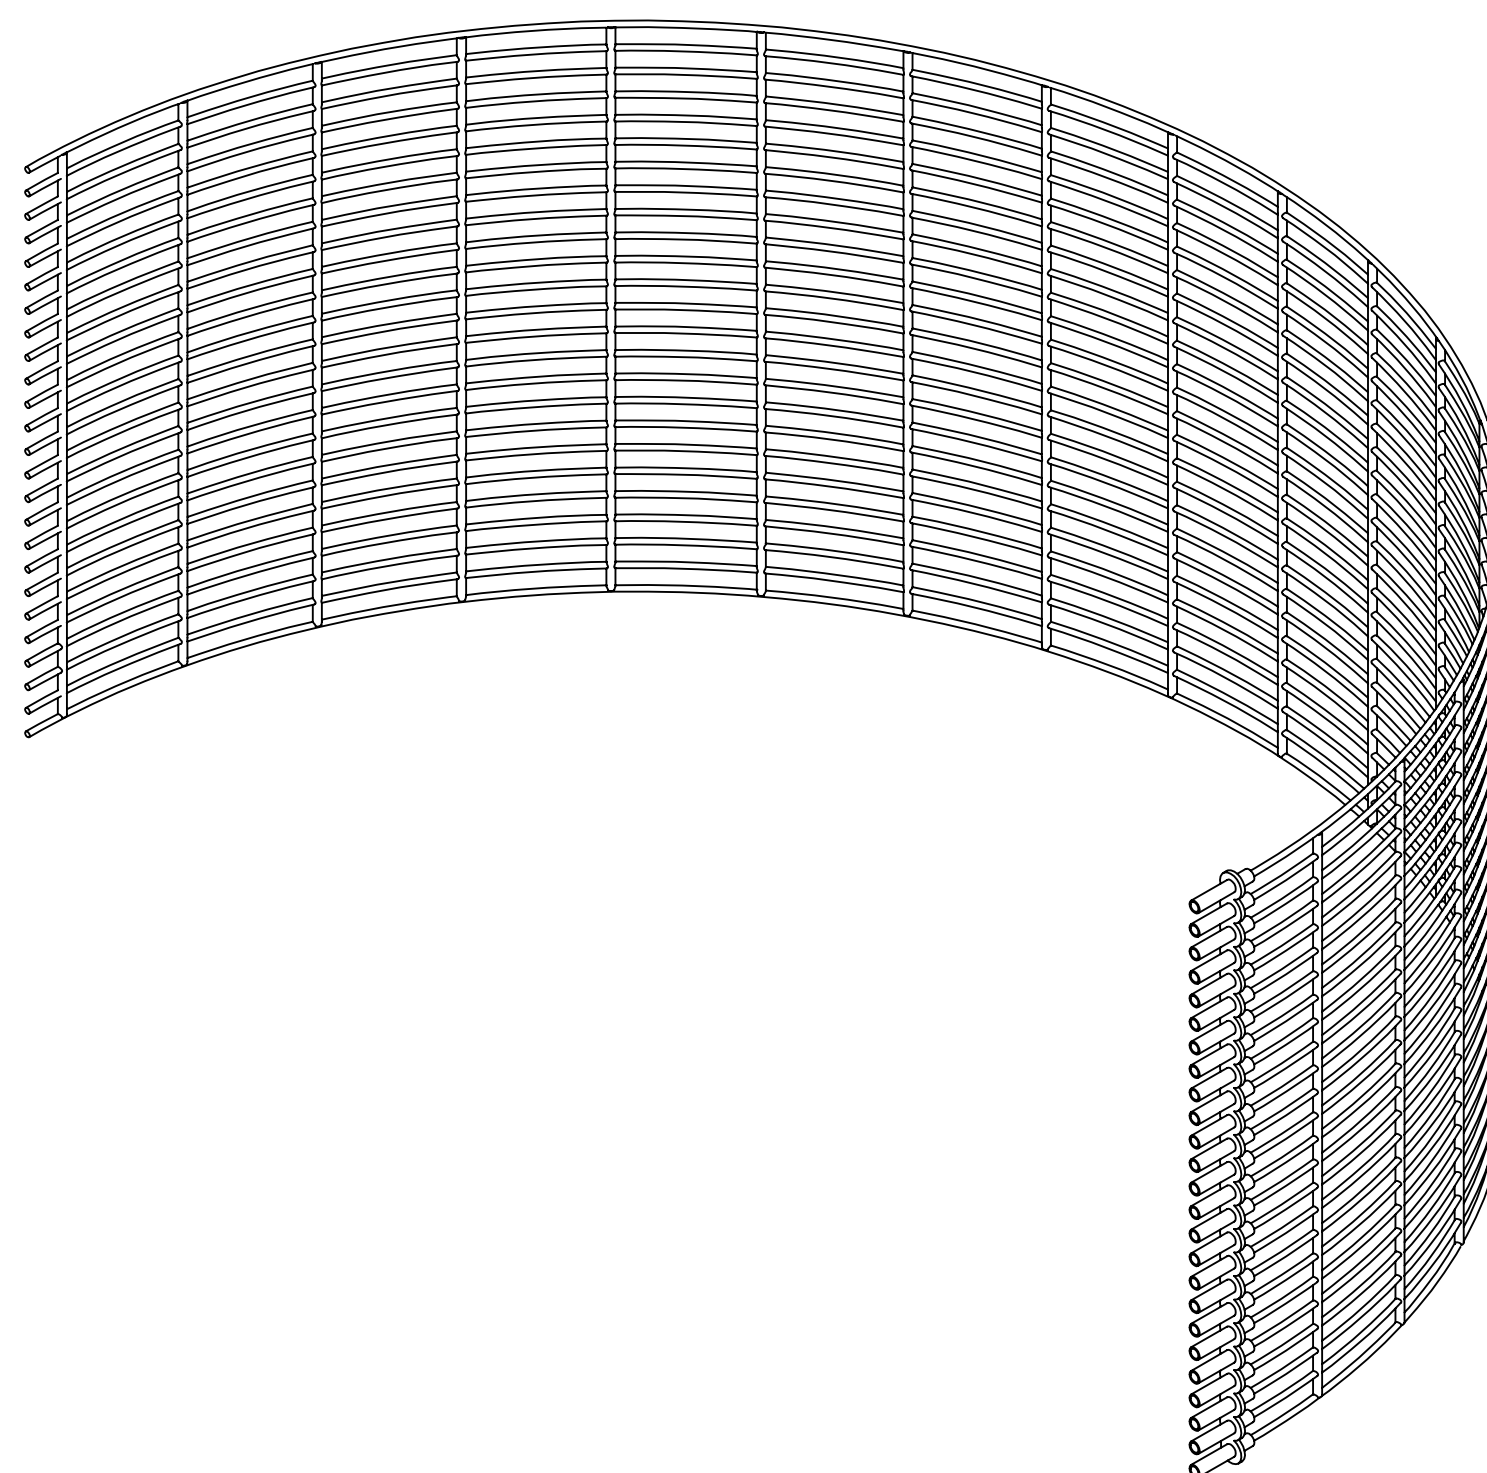

SPECIFICATIONS:

1. OPERATING TEMPERATURE: 250 °C
2. MULTICONDUCTOR RIBBON CABLE, 28 AWG
3. MULTI-STRAND CORE
4. 2 AMPS PER CONDUCTOR
5. VOLTAGE RATING: 600VAC, 2kVDC
6. 244.0 Ohms/km @ 20 °C MAX
7. NUMBER OF WIRES: 25
8. CABLE WIDTH: 1.22
9. CABLE THICKNESS: 0.10
10. INSULATION DIAMETER: .032
11. WIRE DIAMETER: 7 X 0.005
12. MINIMUM BEND RADIUS: 0.53

Subminiature D-type Contact/Cable, 25 Pins, In-Vacuum, Peek Connector w/ Kapton Wire, 39" Length, Female Pins

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC. TITLE: CONTACT-CABLE, TYPE-D, IN-VACUUM, 25 PINS, FEMALE, 39"
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:		
	APPLICATION		
	NEXT ASSY	USED ON	
FINISH	SURFACE FINISH:	63/ OR BETTER	
PLATING	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
	DOWNLOADED FROM MPFPI.COM	DWG. NO.	REV
		A2365-1-WR	
	Wednesday, February 13, 2019 1:19:33 PM		