


MPF PRODUCTS INC.

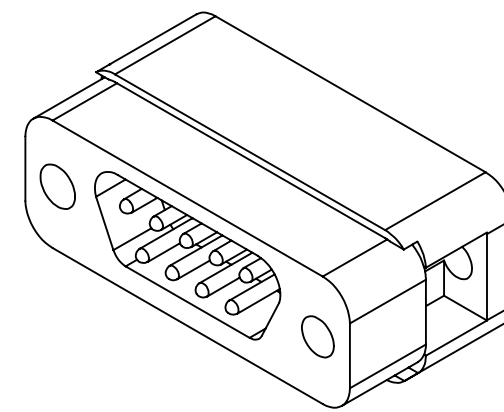

SPECIFICATIONS:

1. OPERATING TEMPERATURE: 250 °C (CONTACTS NOT INCLUDED)

Subminiature D-type Connector, 9 Pins, In-Vacuum, Male Pins

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES	NAME	DATE	MPF PRODUCTS INC.
TOLERANCES:	DRAWN	9/11/2015	
ANGULAR: MACH ± 1/2°	CHECKED	9/11/2015	
TWO PLACE DECIMAL ± .030	ENG APPR.	9/11/2015	
THREE PLACE DECIMAL ± .015	THIRD ANGLE:		CONNECTOR, TYPE-D, IN-VACUUM, PEEK, 9 PINS, MALE
MATERIAL			
FINISH	APPLICATION		DOWNLOADED FROM MPFPI.COM
PLATING	NEXT ASSY	USED ON	
	SURFACE FINISH: 63/ OR BETTER		DWG. NO. A2374-1-CN
	UNLESS OTHERWISE SPECIFIED:		REV.
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Wednesday, February 13, 2019 2:41:40 PM