


MPF PRODUCTS INC.

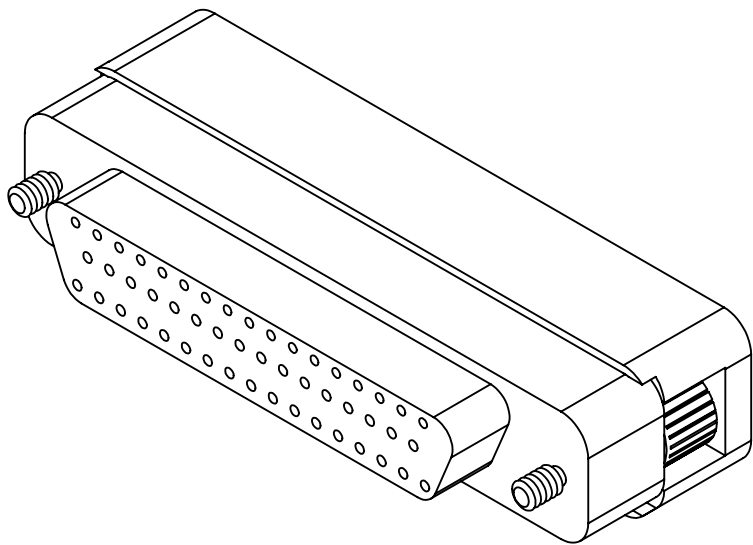

SPECIFICATIONS:
1. OPERATING TEMPERATURE: 250 °C (CONTACTS NOT INCLUDED)

Subminiature D-type Connector, 50 Pins, In-Vacuum, Female Pins

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A			
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC. TITLE: CONNECTOR, TYPE-D, IN-VACUUM, PEEK, 50 PINS, FEMALE DOWNLOADED FROM MPFPI.COM DWG. NO. A2380-1-CN REV		
		DRAWN	WJ	9/11/2015			
		CHECKED		9/11/2015			
		ENG APPR.	WJ	9/11/2015			
MATERIAL		THIRD ANGLE:					
		APPLICATION					
		NEXT ASSY					USED ON
FINISH		SURFACE FINISH: 63 OR BETTER			DWG. NO. A2380-1-CN REV		
PLATING		UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
Wednesday, February 13, 2019 2:51:58 PM							