


MPF PRODUCTS INC.

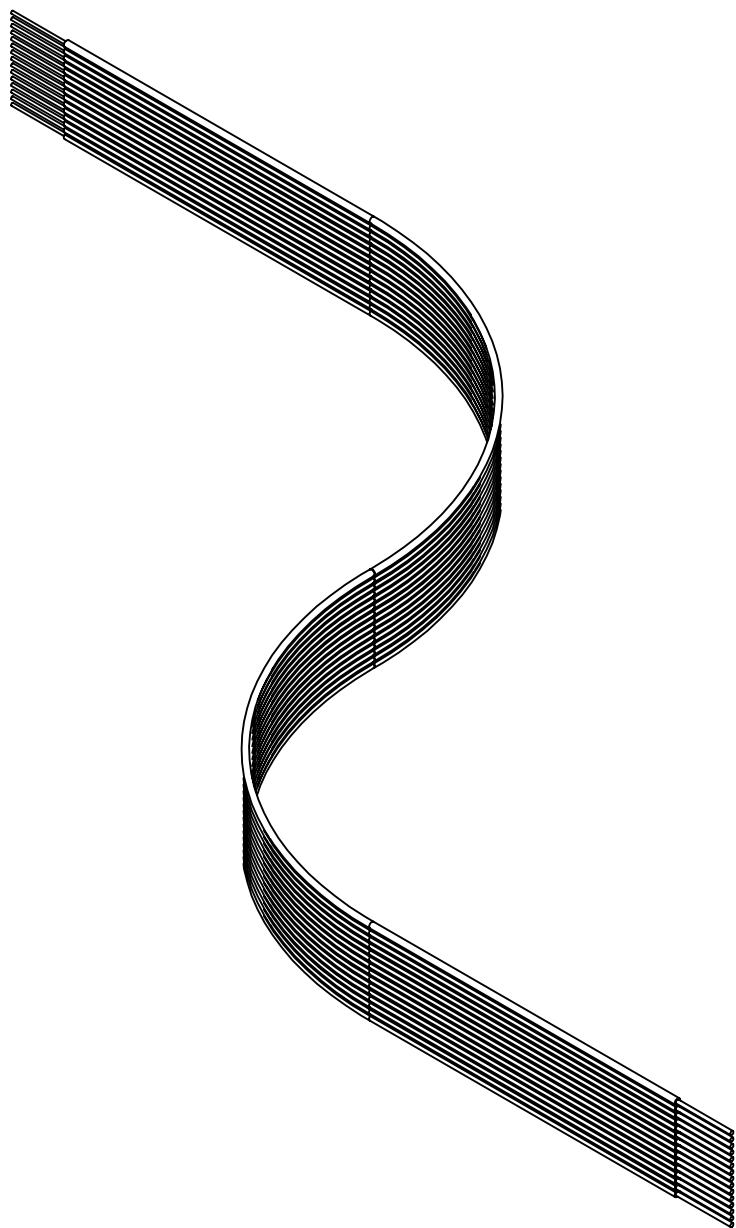

SPECIFICATIONS:

1. OPERATING TEMPERATURE: 250 °C
2. MULTICONDUCTOR RIBBON CABLE, 28 AWG
3. MULTI-STRAND CORE
4. 2 AMPS PER CONDUCTOR
5. VOLTAGE RATING: 600VAC, 2kVDC
6. 244.0 Ohms/km @ 20 °C MAX
7. NUMBER OF WIRES: 15
8. CABLE WIDTH: 1.22
9. CABLE THICKNESS: 0.10
10. INSULATION DIAMETER: .032
11. WIRE DIAMETER: 7 X 0.005
12. MINIMUM BEND RADIUS: 0.88

Subminiature D-type Ribbon Cable, 15 Wires, In-Vacuum, Kapton Wire Insulation, 96" Length

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 MATERIAL		DRAWN	WJ	9/11/2015	MPF PRODUCTS INC. TITLE: RIBBON CABLE, TYPE-D, IN-VACUUM, 15 WIRES, 96" DOWNLOADED FROM MPFPI.COM DWG. NO. A2403-3-WR REV
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
		THIRD ANGLE: 			
		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
				Wednesday, February 13, 2019 3:12:10 PM	