


MPF PRODUCTS INC.

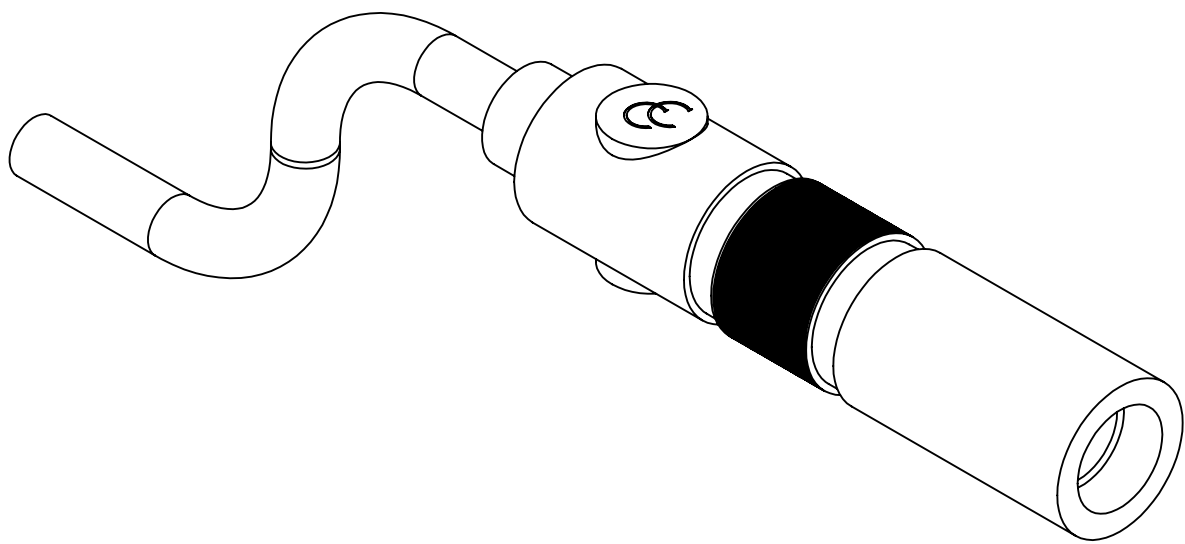

- SPECIFICATIONS:
- 1. CONNECTOR BODY MOLDED SILICONE RUBBER PER ZZ-R-765, COLOR -RED IRON OXIDE.
  - 2. CABLE 12 AWG 96" LONG
  - 3. CONTACT, 12 AWG SOCKET, GOLD PLATED.
  - 4. OPERATING TEMPERATURE -55°C TO +125°C.
  - 5. OPERATING VOLTAGE: 5KV.
  - 6. OPERATING CURRENT: 25 AMPS MAX.

High Voltage Power Connector/Cable, 5,000 Volts, 25 Amps

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.  TITLE:  POWER GLOVE CONNECTOR, 5KV, SILICONE CABLE, 96"  DOWNLOADED FROM MPFPI.COM
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			DWG. NO.  A2459-1-CN  REV
		APPLICATION			
		NEXT ASSY      USED ON			
FINISH		SURFACE FINISH: 63 OR BETTER			Wednesday, February 13, 2019 3:30:33 PM
PLATING		UNLESS OTHERWISE SPECIFIED:  ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			