
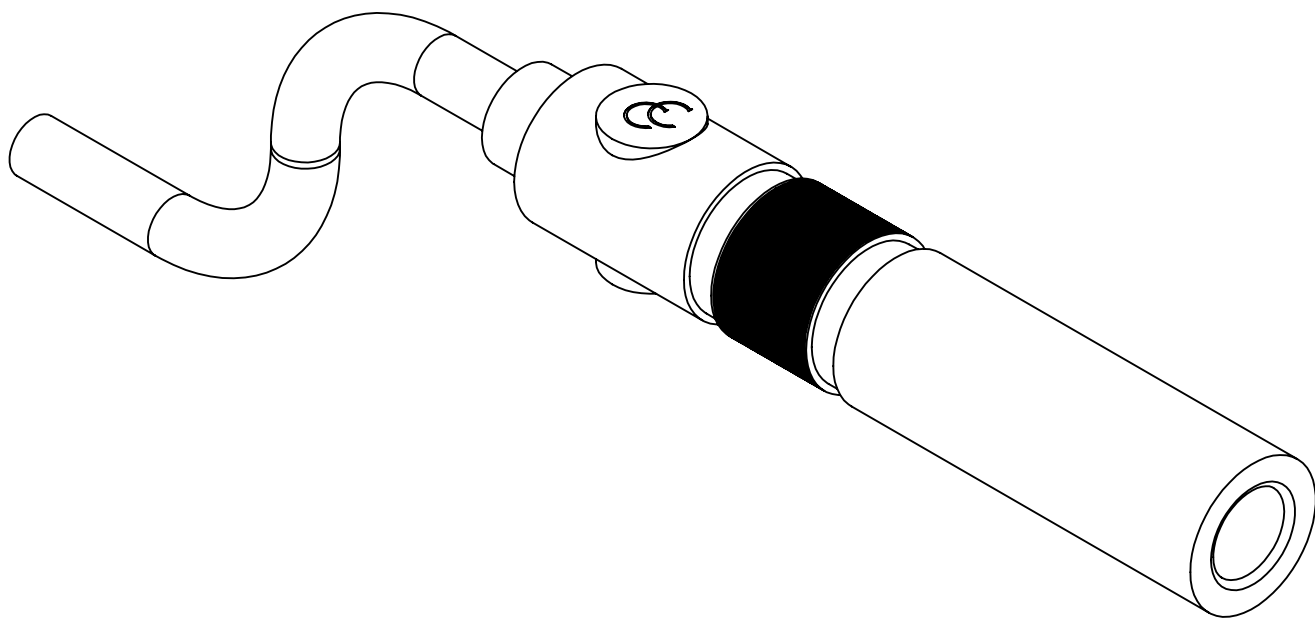



MPF PRODUCTS INC.



- SPECIFICATIONS:
- 1. CONNECTOR BODY MOLDED SILICONE RUBBER PER ZZ-R-765, COLOR -RED IRON OXIDE.
 - 2. CABLE 12 AWG 96" LONG
 - 3. CONTACT, 12 AWG SOCKET, GOLD PLATED.
 - 4. OPERATING TEMPERATURE -55°C TO +125°C.
 - 5. OPERATING VOLTAGE: 25KV.
 - 6. OPERATING CURRENT: 25 AMPS MAX.

High Voltage Power Connector/Cable, 10,000/20,000 Volts, 25 Amps

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			TITLE: POWER GLOVE CONNECTOR, 10KV/20KV, SILICONE CABLE, 96"
					
		APPLICATION			
		NEXT ASSY USED ON			
FINISH		SURFACE FINISH:			DOWNLOADED FROM MPFPI.COM
		 63 OR BETTER			
PLATING		UNLESS OTHERWISE SPECIFIED:			DWG. NO. REV
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
		A2459-2-CN			Wednesday, February 13, 2019 3:32:14 PM