



MPF PRODUCTS INC.

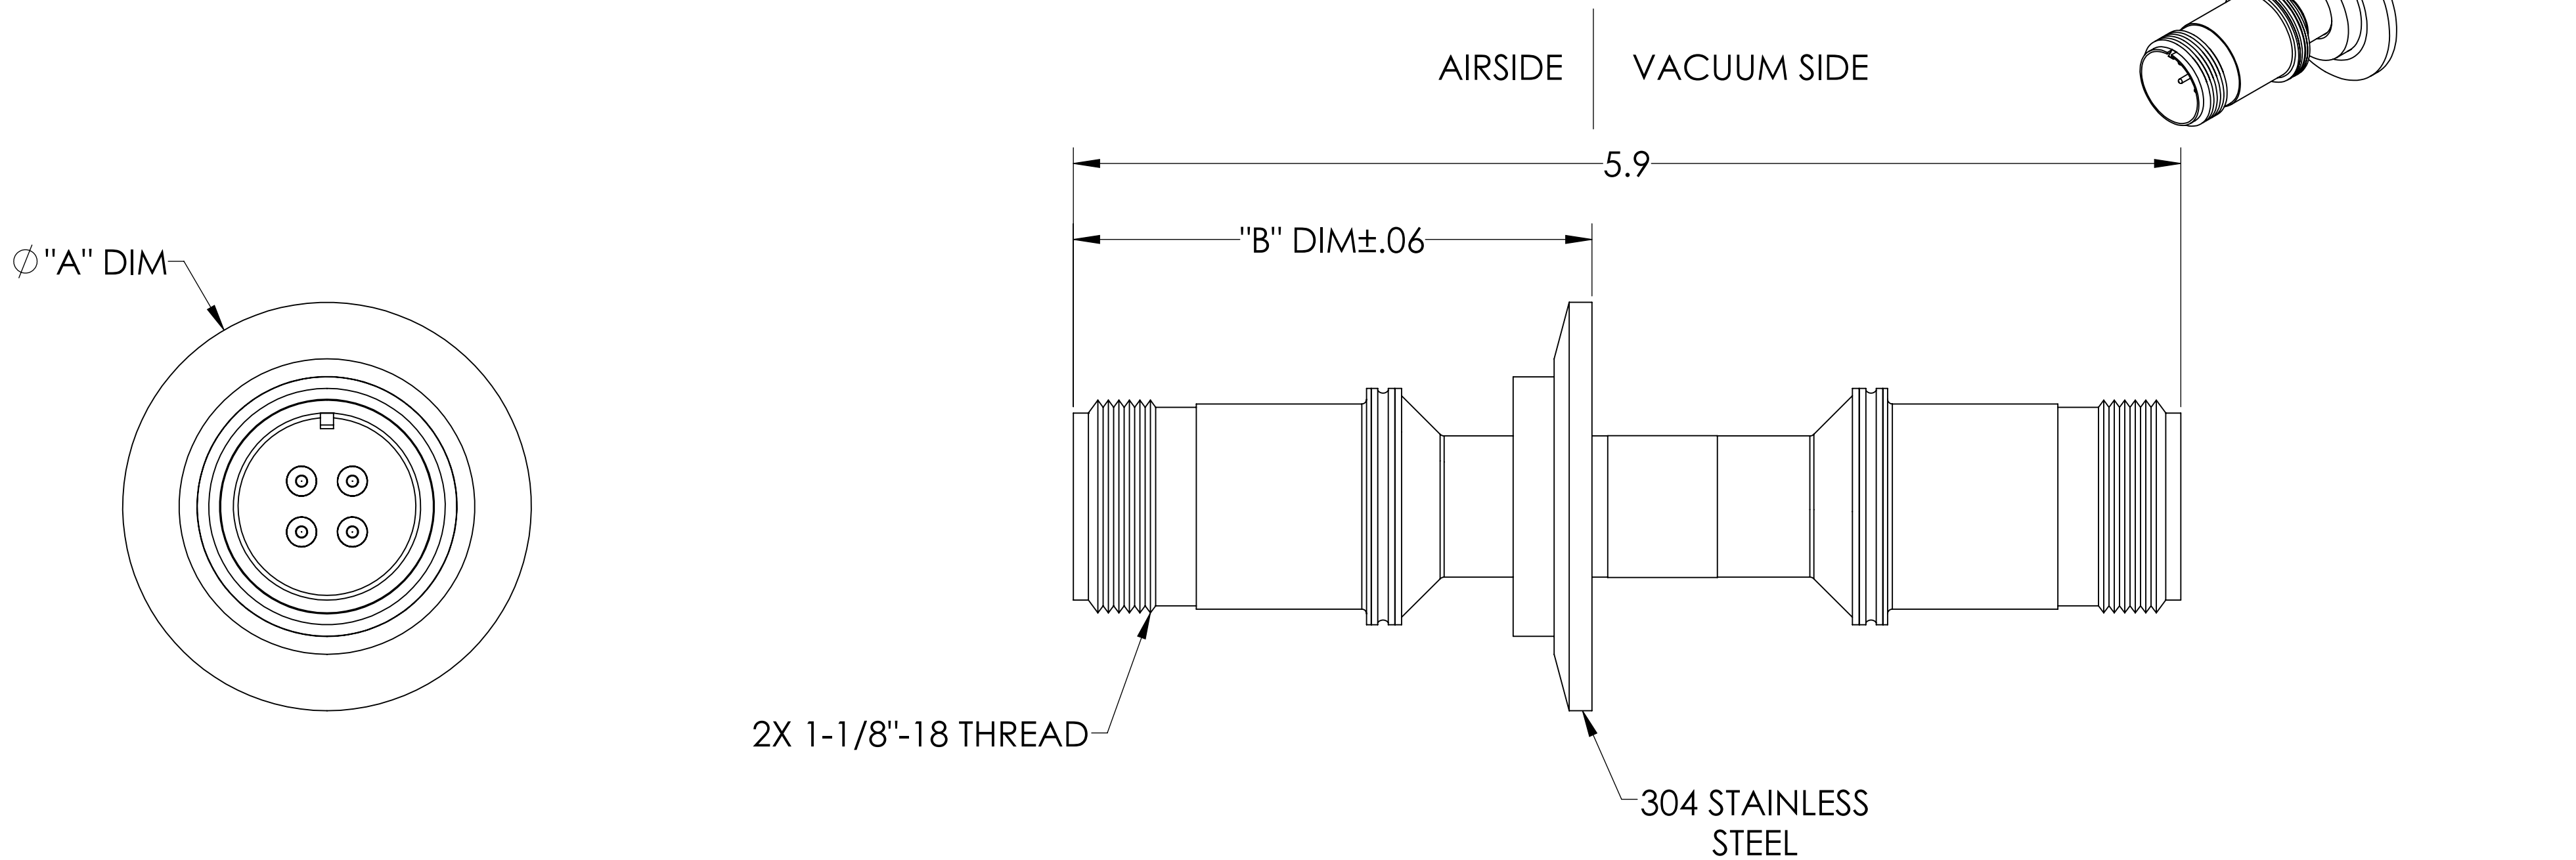



PART #	"A" DIM	"B" DIM
A2563-1-QF	2.16	2.74
A2563-2-QF	2.95	2.64

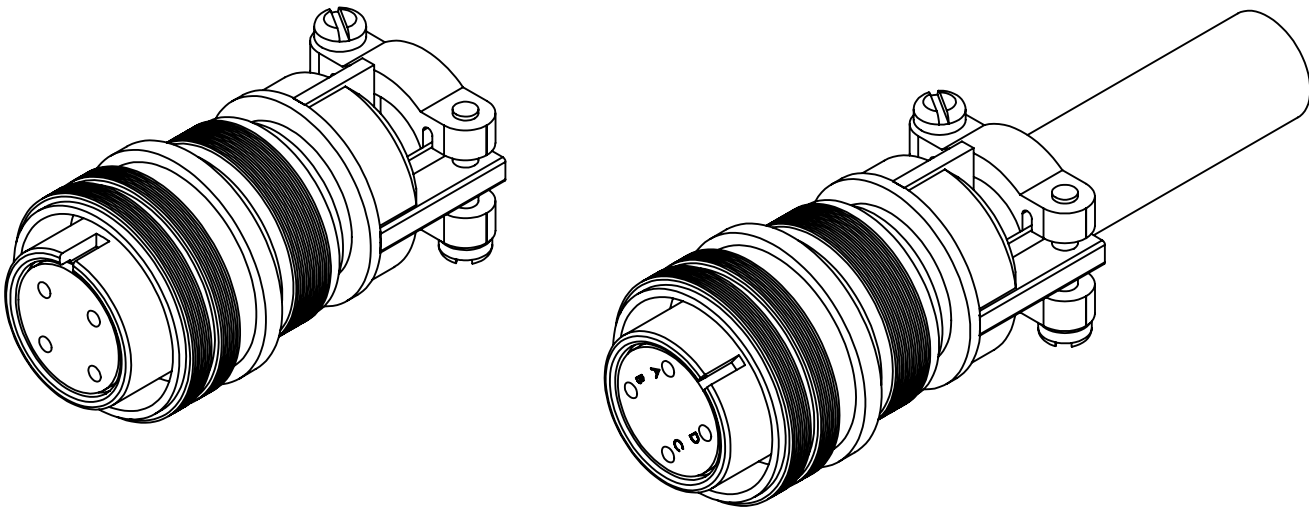

SPECIFICATIONS:

- 1. VOLTAGE: 700 VOLTS DC
- 2. CURRENT: 10 AMPS PER PIN, 28 AMPS FULL LOAD
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. VACUUM SIDE CONNECTOR RATED FOR -100 TO 350 °C
- 5. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 4 Pins, 700 Volts, 10 Amps per Pin, Double-Ended w/ Air & Vacuum-side Connectors, QF/KF

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 MATERIAL FINISH PLATING	QUOTATION #		N/A	MPF PRODUCTS INC.	
	DRAWN	NAME	DATE		
	CHECKED		9/11/2015	TITLE: MULTIPIN, 4 PINS, 700V, 10 A, DOUBLE ENDED, QF/KF	
	ENG APPR.	WJ	9/11/2015		
	THIRD ANGLE:				
				DOWNLOADED FROM MPFPI.COM	
	APPLICATION				
NEXT ASSY					
USED ON					
SURFACE FINISH:  OR BETTER			DWG. NO.		
UNLESS OTHERWISE SPECIFIED:			REV		
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			A2563		
Thursday, February 7, 2019 8:44:14 AM					