

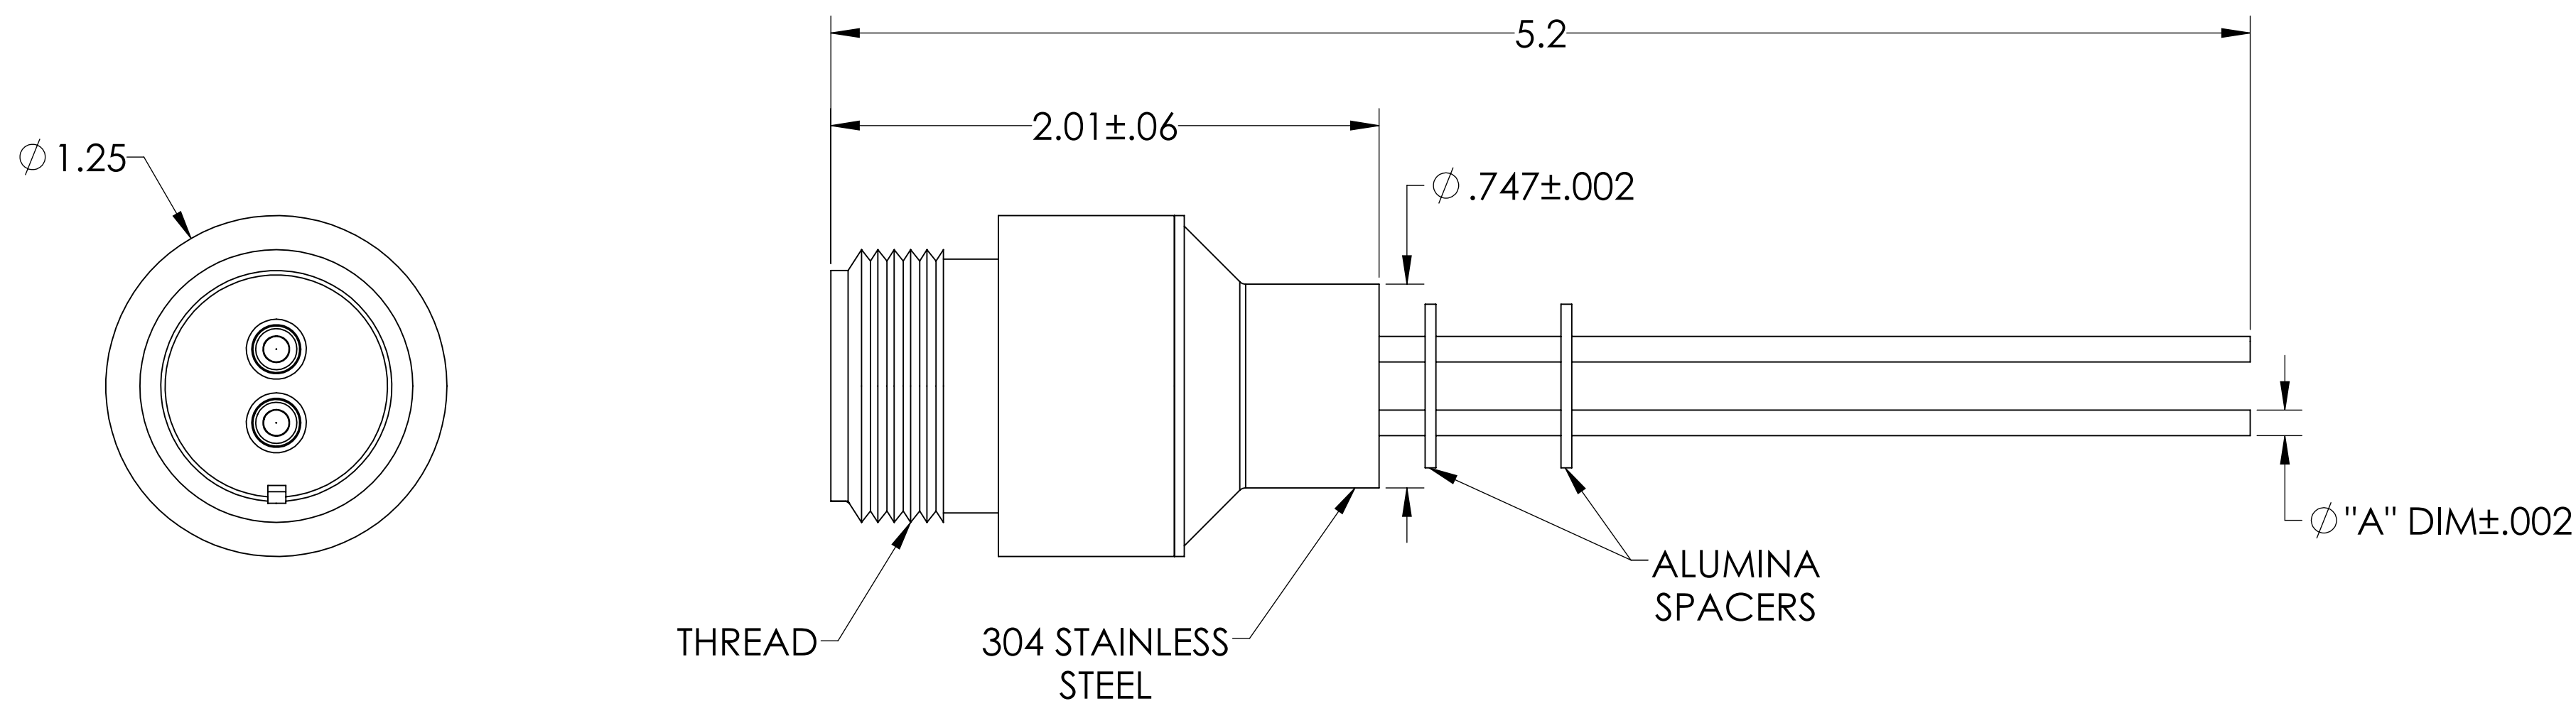


MPF PRODUCTS INC.

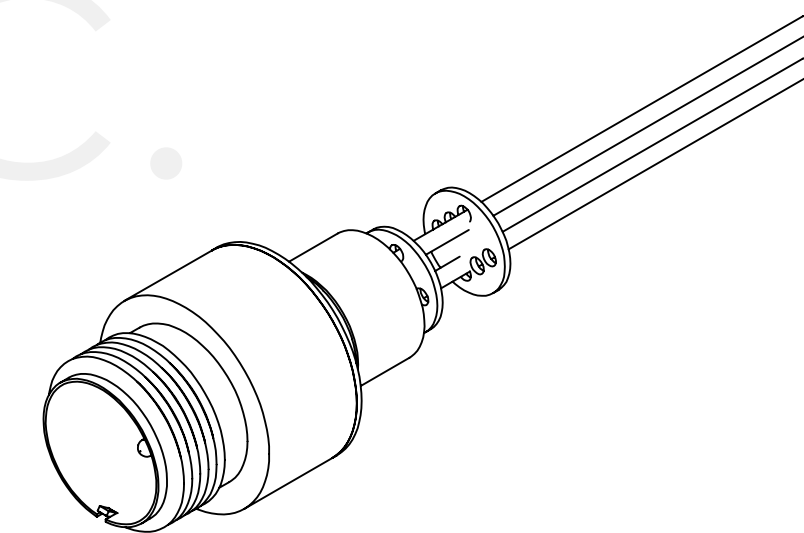

PART #	NUMBER OF PINS	"A" DIM	CONDUCTOR MATERIAL	CURRENT RATINGS PER PIN	THREAD
A2566-1-W	2	.092	NICKEL 200	16 AMPS	1"-20
A2566-3-W	2	.094	MOLYBDENUM	28 AMPS	1"-20
A2566-5-W	4	.092	NICKEL 200	16 AMPS	1-1/8"-18
A2566-7-W	4	.094	MOLYBDENUM	28 AMPS	1-1/8"-18

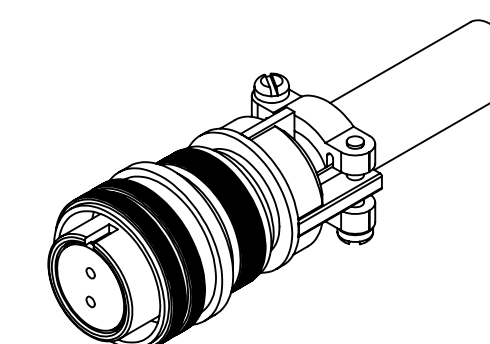

SPECIFICATIONS:

1. VOLTAGE: 700 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Multipin Feedthrough w/ Air-side Connector, 700 Volts, 0.75" Weld Adapter

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		MULTIPIN, 700V, .747" WELD ADAPTER	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH: 63 OR BETTER		SURFACE FINISH: 63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
UNLESS OTHERWISE SPECIFIED:		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A2566	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
				Thursday, February 7, 2019 8:43:32 AM	