

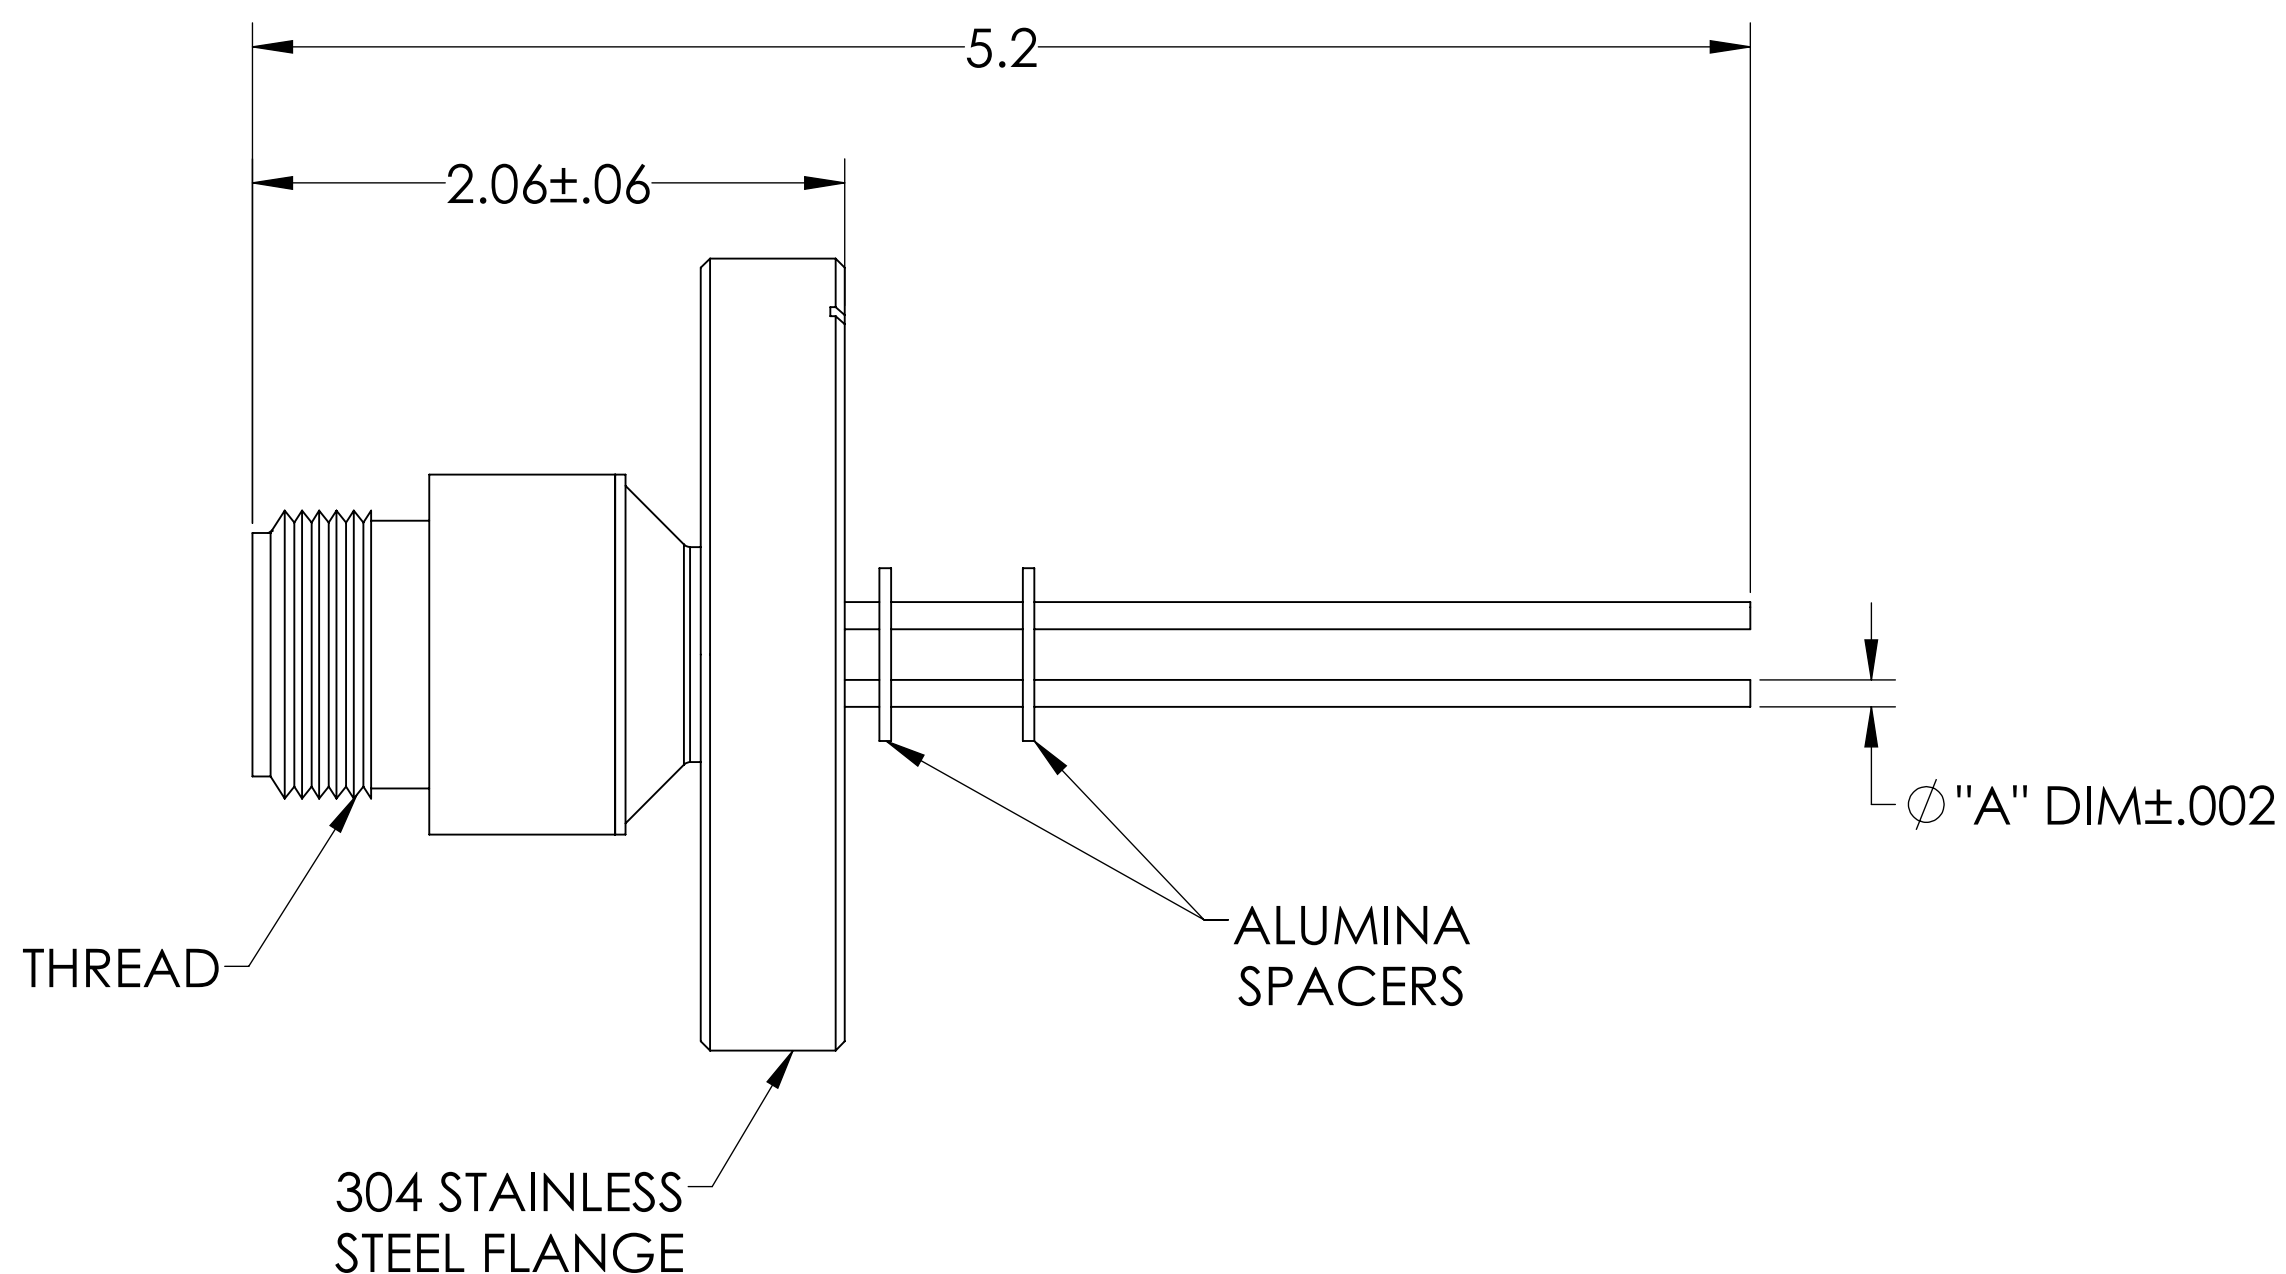
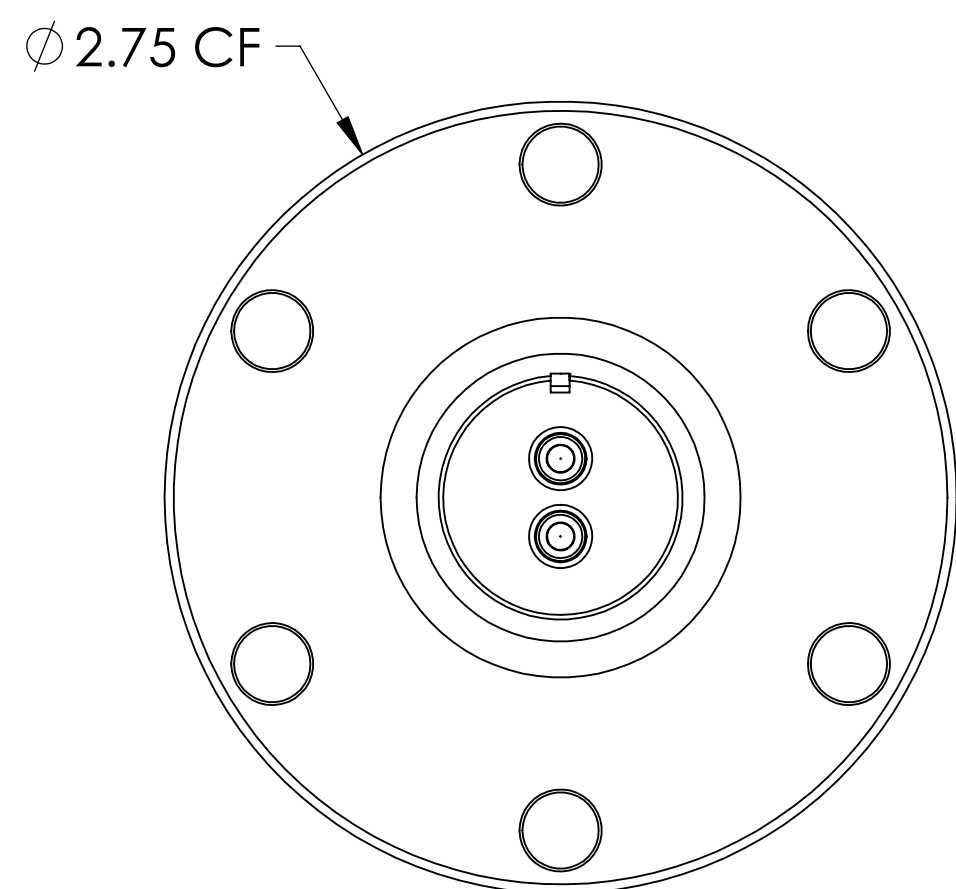


# MPF PRODUCTS INC.

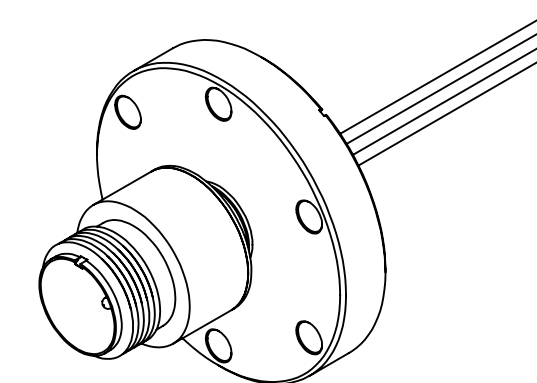

PART #	NUMBER OF PINS	"A" DIM	CONDUCTOR MATERIAL	CURRENT RATINGS PER PIN	THREAD
A2569-1-CF	2	.092	NICKEL 200	16 AMPS	1"-20
A2569-3-CF	2	.094	MOLYBDENUM	28 AMPS	1"-20
A2569-5-CF	4	.092	NICKEL 200	16 AMPS	1-1/8"-18
A2569-7-CF	4	.094	MOLYBDENUM	28 AMPS	1-1/8"-18

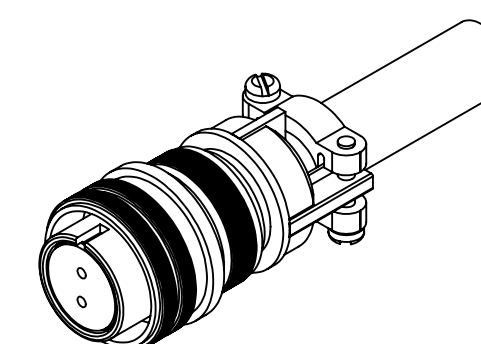

**SPECIFICATIONS:**

1. VOLTAGE: 700 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough w/ Air-side Connector, 700 Volts, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015	TITLE:  MULTIPIN, 700V, 275CF	
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		DOWNLOADED FROM MPFPI.COM	
		APPLICATION		DWG. NO.	
		NEXT ASSY	USED ON	REV	
FINISH		SURFACE FINISH: 63 OR BETTER		A2569	
PLATING		UNLESS OTHERWISE SPECIFIED:		Tuesday, January 29, 2019 12:01:52 PM	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			