
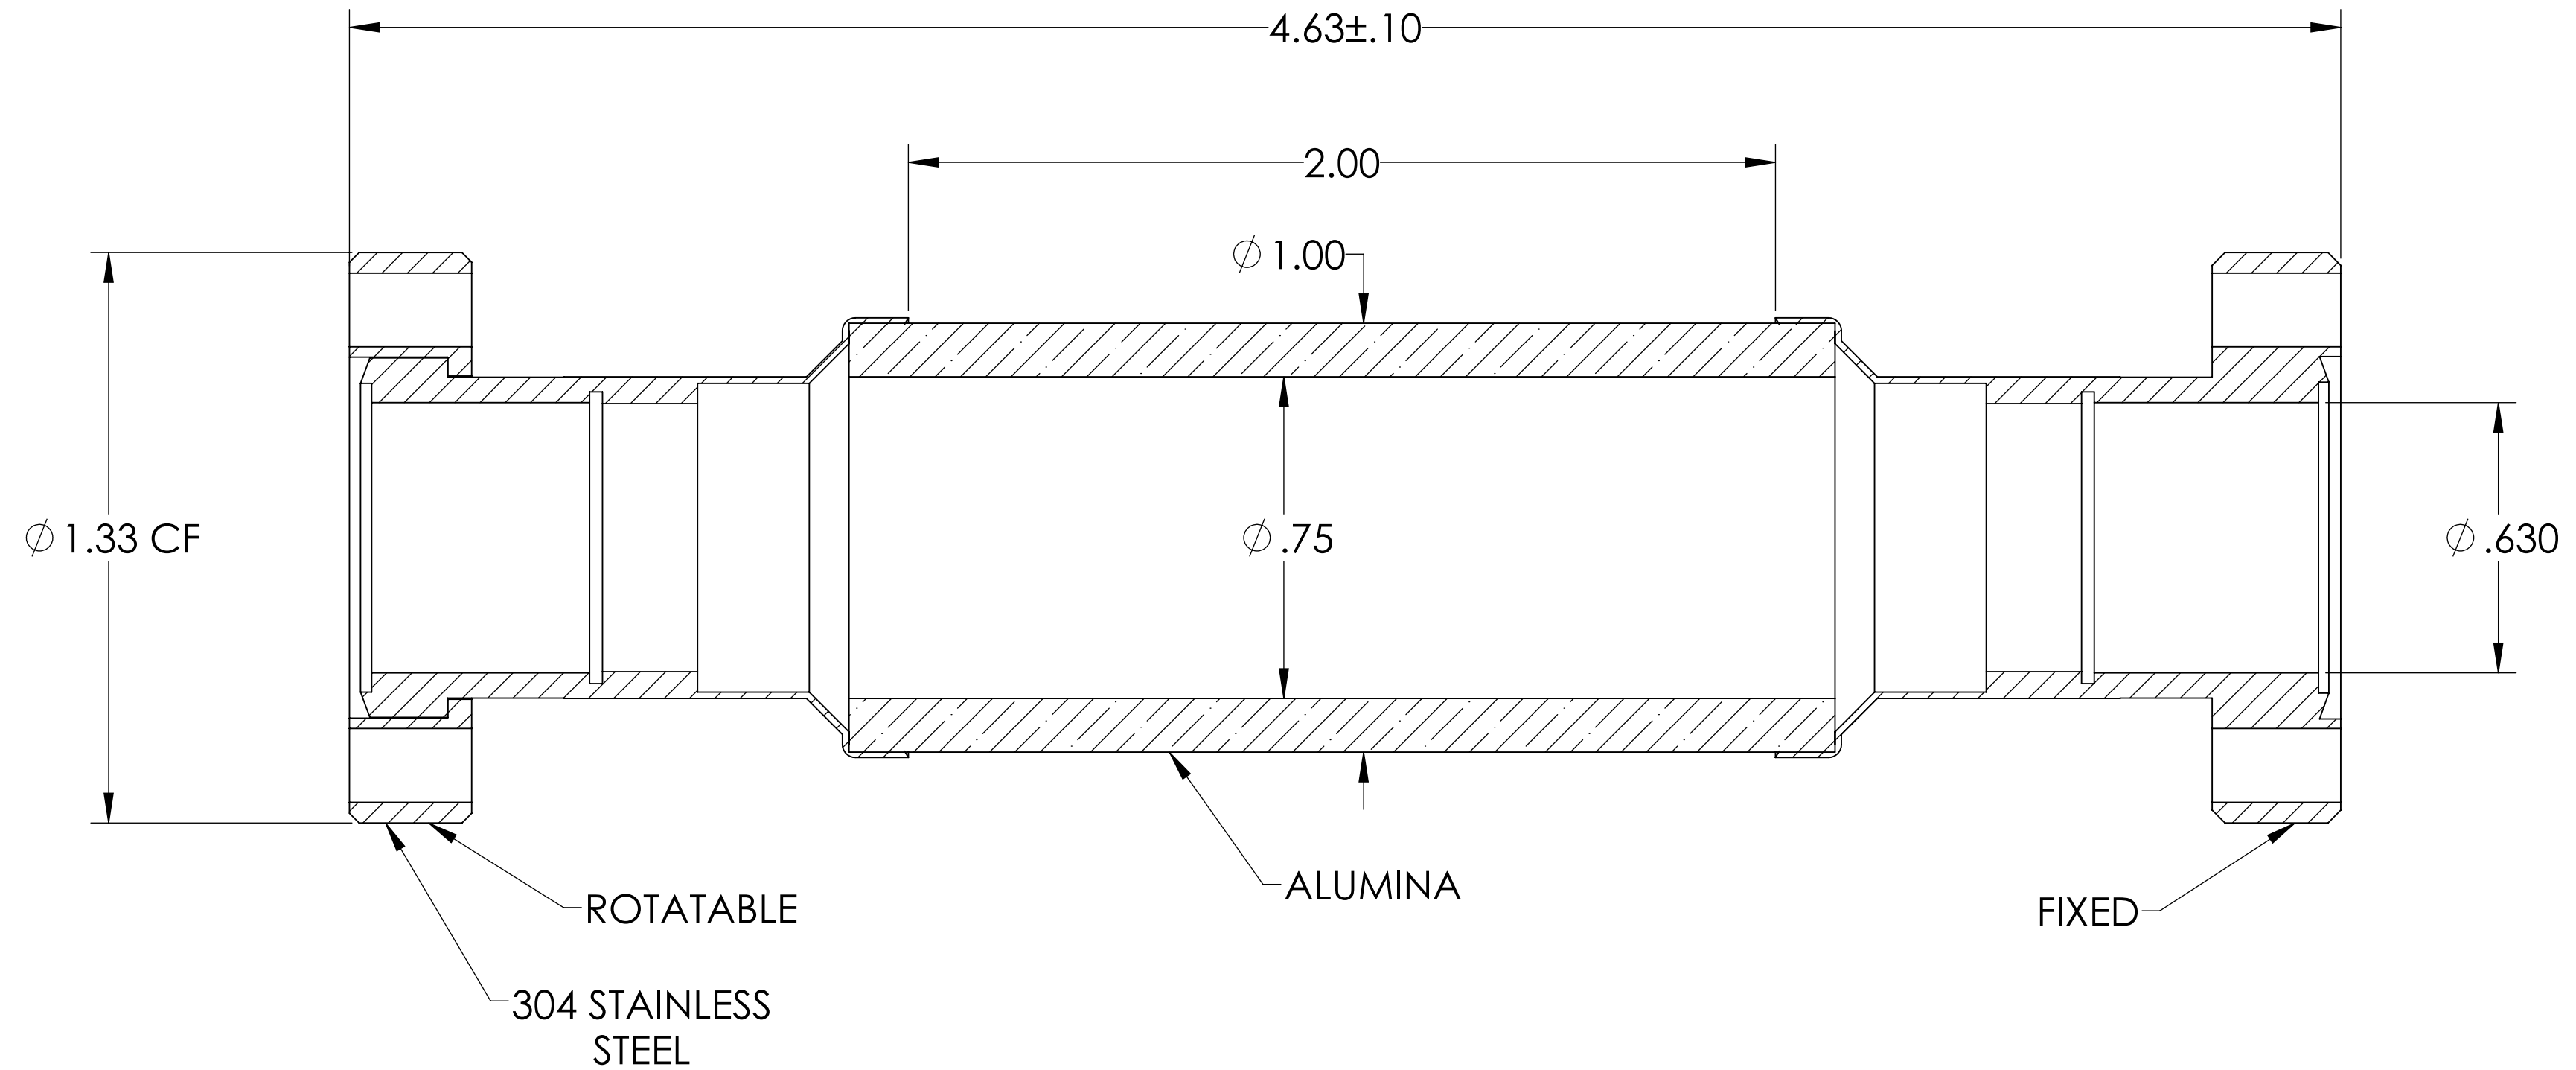


# MPF PRODUCTS INC.

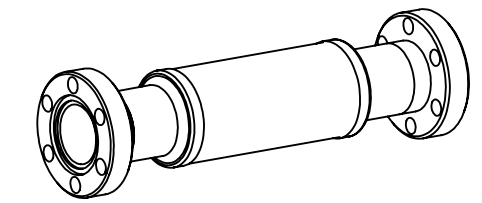

**SPECIFICATIONS:**

1. VOLTAGE: 30KV
2. TEMPERATURE: -200°C TO 450°C
3. LEAK RATE < 1X10-9 ATM CC/SEC HE

Break, 30KV Isolation, 0.63" Inner Dia, 1.33" Conflat Flange, High Voltage Isolation, Thermal Isolation, Rotatable Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.	
TOLERANCES:		DRAWN	9/11/2015		
ANGULAR: MACH ± 1/2°		CHECKED	9/11/2015		
TWO PLACE DECIMAL ± .030		ENG APPR.	9/11/2015		
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		TITLE: BREAK, 30KV ISOLATION, 0.63" INNER DIA, 1.33" CONFLAT FLANGE DOWNLOADED FROM MPFPI.COM	
MATERIAL					
FINISH		APPLICATION NEXT ASSY      USED ON			
PLATING		SURFACE FINISH: 63 OR BETTER		DWG. NO. A2596-1-CF	
		UNLESS OTHERWISE SPECIFIED:		REV	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Thursday, January 24, 2019 9:19:21 AM	