

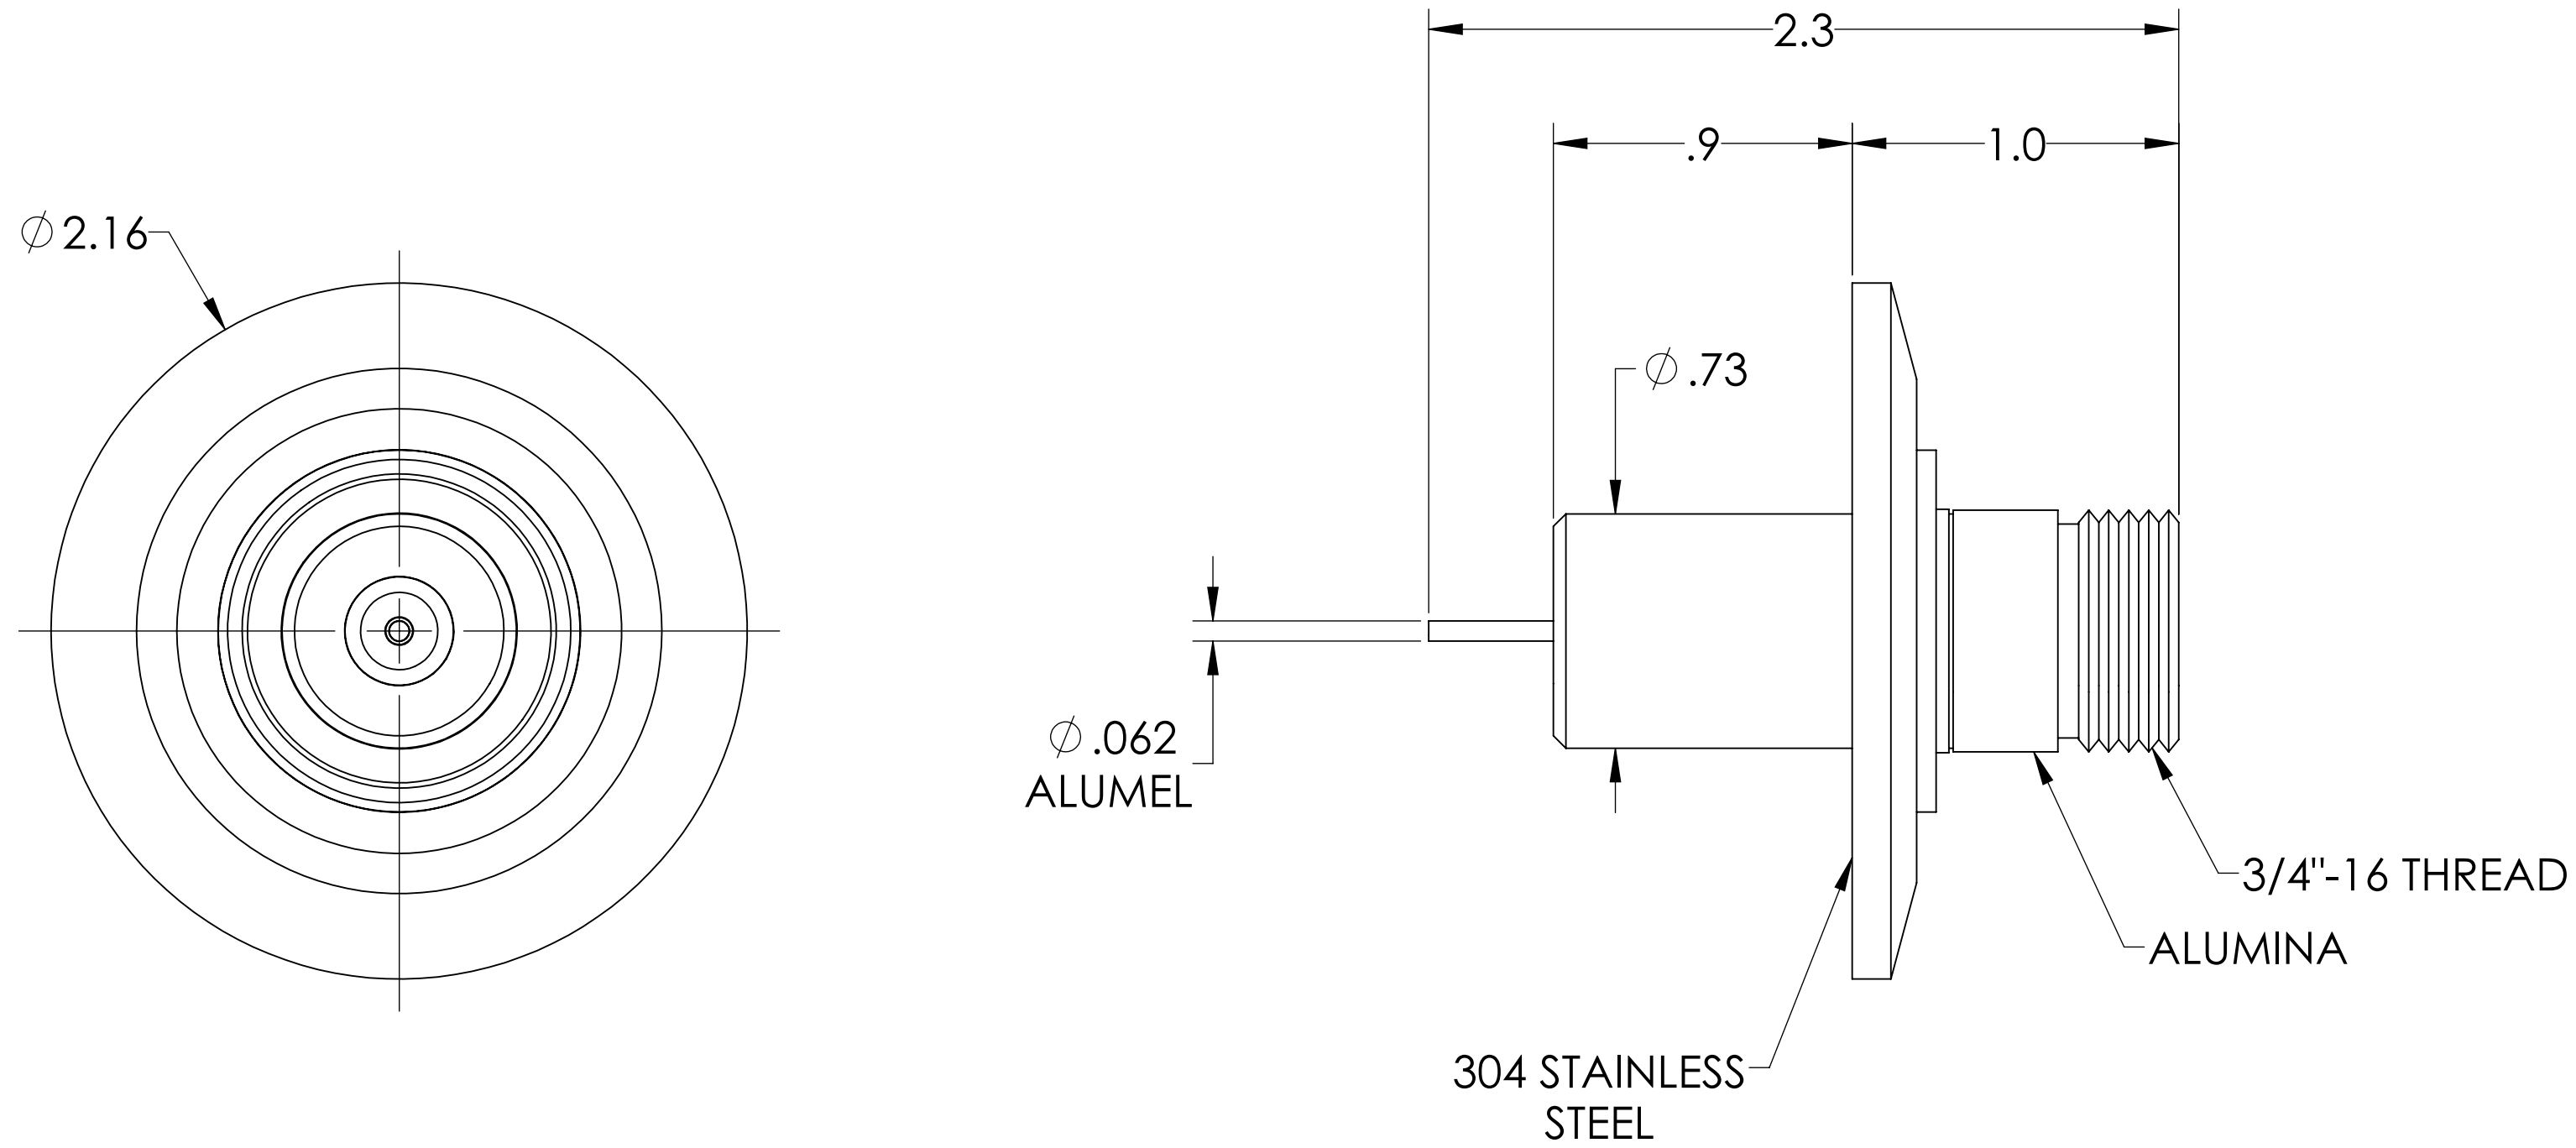


MPF PRODUCTS INC.



HVL CONNECTOR/CABLE

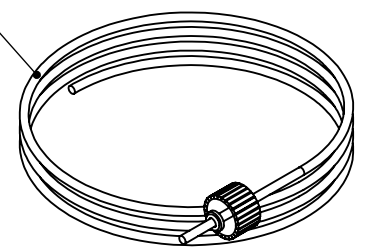

PART #	Ø"A" DIM
A2606-1-QF	2.16
A2606-2-QF	2.95

NOTE:

1. VOLTAGE: 40,000 VOLTS DC (WITH AIRSIDE PLUG)
2. CURRENT: 10 AMPS
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ 8' HVL Connector/Cable, 40 KV, 1 Pin, QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION		
PLATING	NEXT ASSY USED ON		
	SURFACE FINISH: 63/ OR BETTER		
	UNLESS OTHERWISE SPECIFIED:		
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
TITLE:		MPF PRODUCTS INC.	
POWER FEEDTHROUGH, 40 KV, 1 PIN, QF/KF		DWG. NO. A2606	
DOWNLOADED FROM MPFPI.COM		REV	
Tuesday, October 22, 2019 11:35:32 AM			