


MPF PRODUCTS INC.

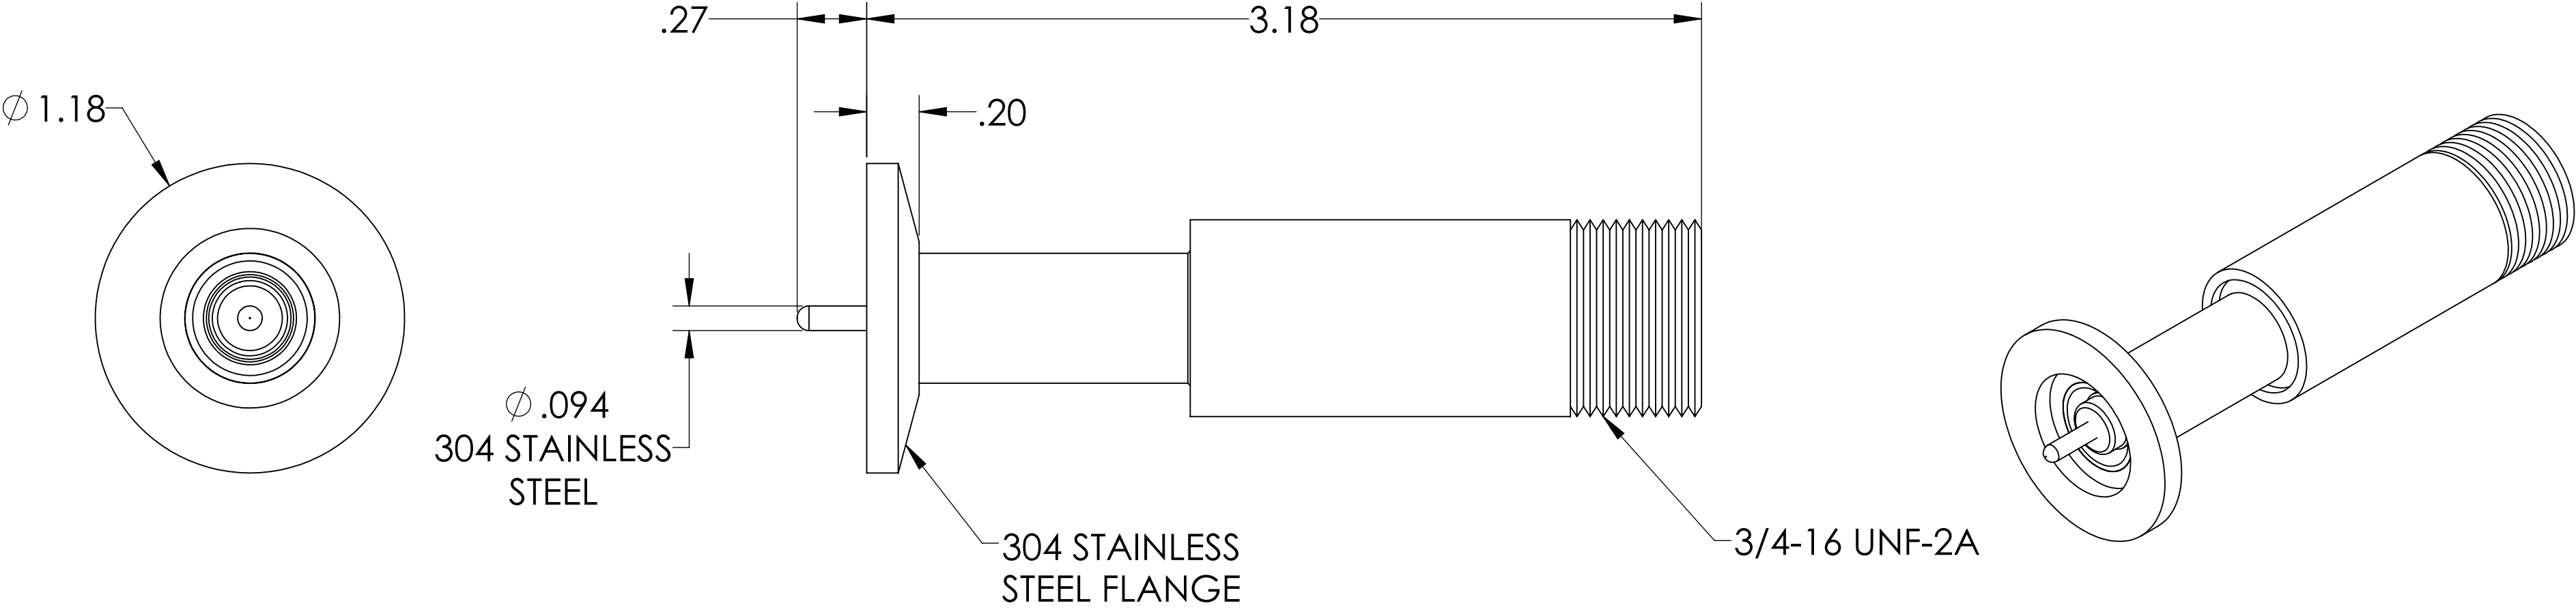

| PART # | AIRSIDE CONNECTOR INCLUDED |
|------------|----------------------------|
| A2610-1-QF | YES |
| A2610-2-QF | NO |

- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 7500 VOLTS DC
 - 3. CURRENT: 3 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), -200 TO 300°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

SHV-B (Bakeable) Coaxial Feedthrough, 1 Pin, Grounded Shield, 1.18" QF/KF, UHV Compatible

| | | | |
|---|--|--|-----------|
| UNLESS OTHERWISE SPECIFIED: | QUOTATION # | | N/A |
| DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 | DRAWN | NAME | DATE |
| | WJ | WJ | 9/11/2015 |
| | CHECKED | | 9/11/2015 |
| | ENG APPR. | WJ | 9/11/2015 |
| MATERIAL | THIRD ANGLE: | | |
| FINISH | APPLICATION NEXT ASSY USED ON | | |
| | SURFACE FINISH: 63/ OR BETTER | | |
| PLATING | UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | |
| TITLE: SHV-B COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 1.18" QF/KF | | DOWNLOADED FROM MPFPI.COM DWG. NO. REV | |
| | | A2610 | |
| | | Friday, January 18, 2019 10:25:41 AM | |