
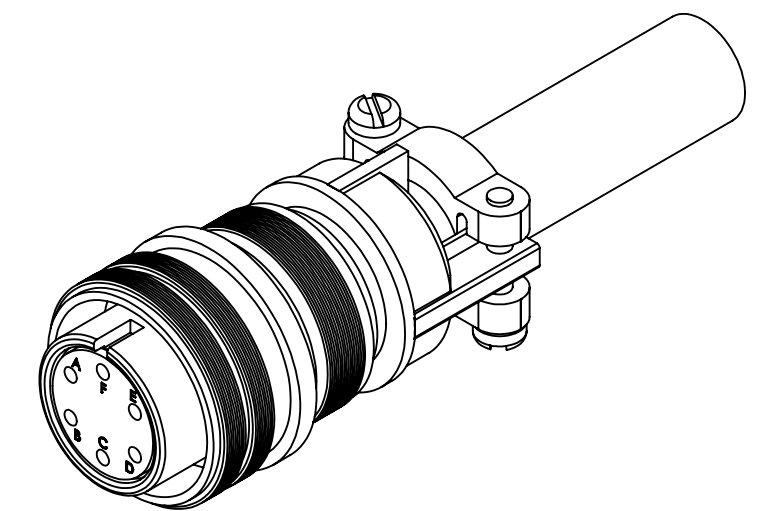
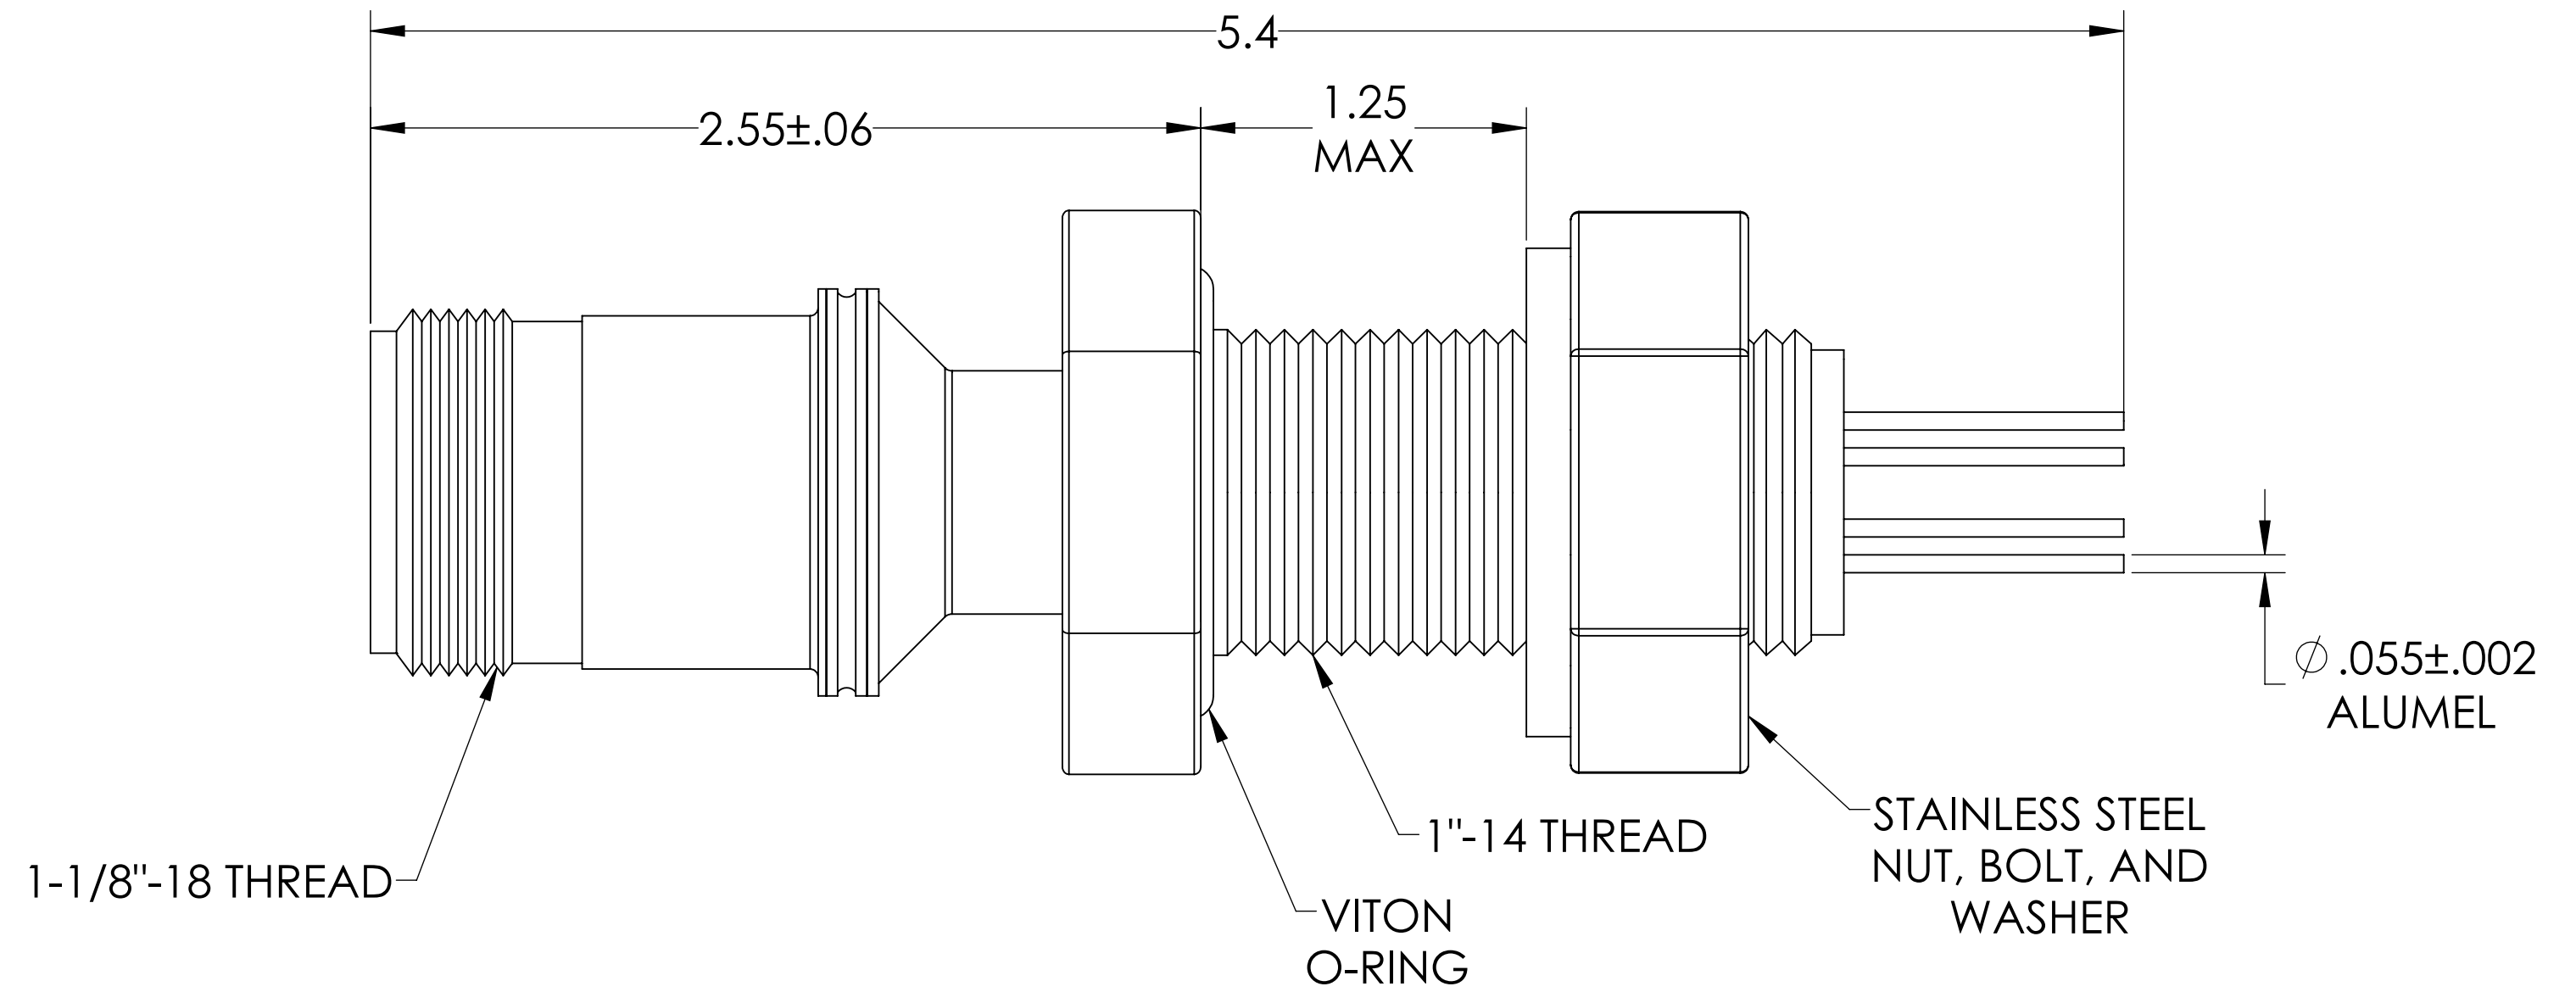
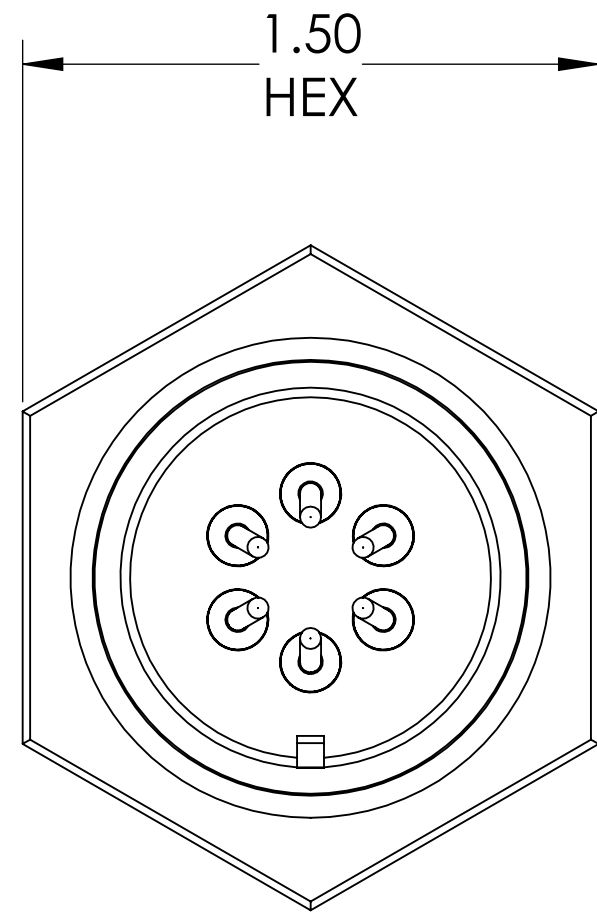


# MPF PRODUCTS INC.

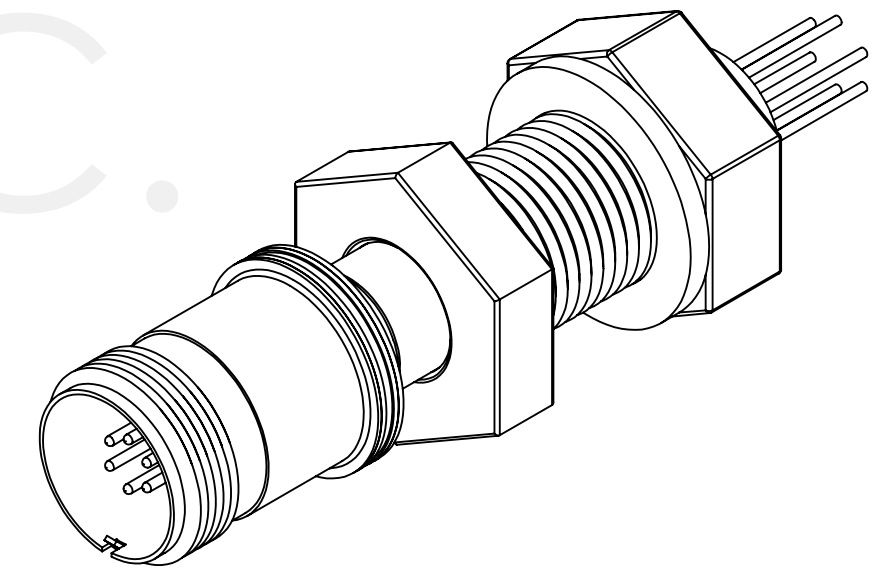

**SPECIFICATIONS:**

1. VOLTAGE: 700 VOLTS DC
2. CURRENT: 10 AMPS PER PIN, 36 AMPS FULL LOAD
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. VACUUM SIDE CONNECTOR RATED FOR -100 TO 350 °C
5. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 6 Pins, 700 Volts, 10 Amps per Pin, 0.056" Dia Conductors w/ Air-side Connector, 1" Baseplate Bolt

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	<b>MPF PRODUCTS INC.</b>
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:	TITLE:	
		MULTIPIN, 6 PINS, 700V, 10A, 1" BASEPLATE BOLT	
FINISH	APPLICATION	DOWNLOADED FROM MPFPI.COM	
PLATING	NEXT ASSY	USED ON	DWG. NO.
	SURFACE FINISH:	63/ OR BETTER	A2968-2-BP
	UNLESS OTHERWISE SPECIFIED:	REV	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	Thursday, February 7, 2019 8:49:08 AM	