PART # A3107-1-CF	REV.	SHEET 1 OF 1

MPF PRODUCTS INC.

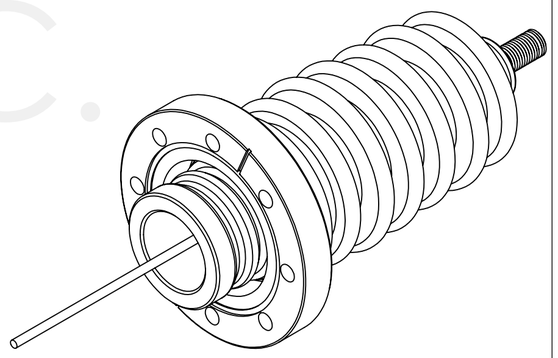

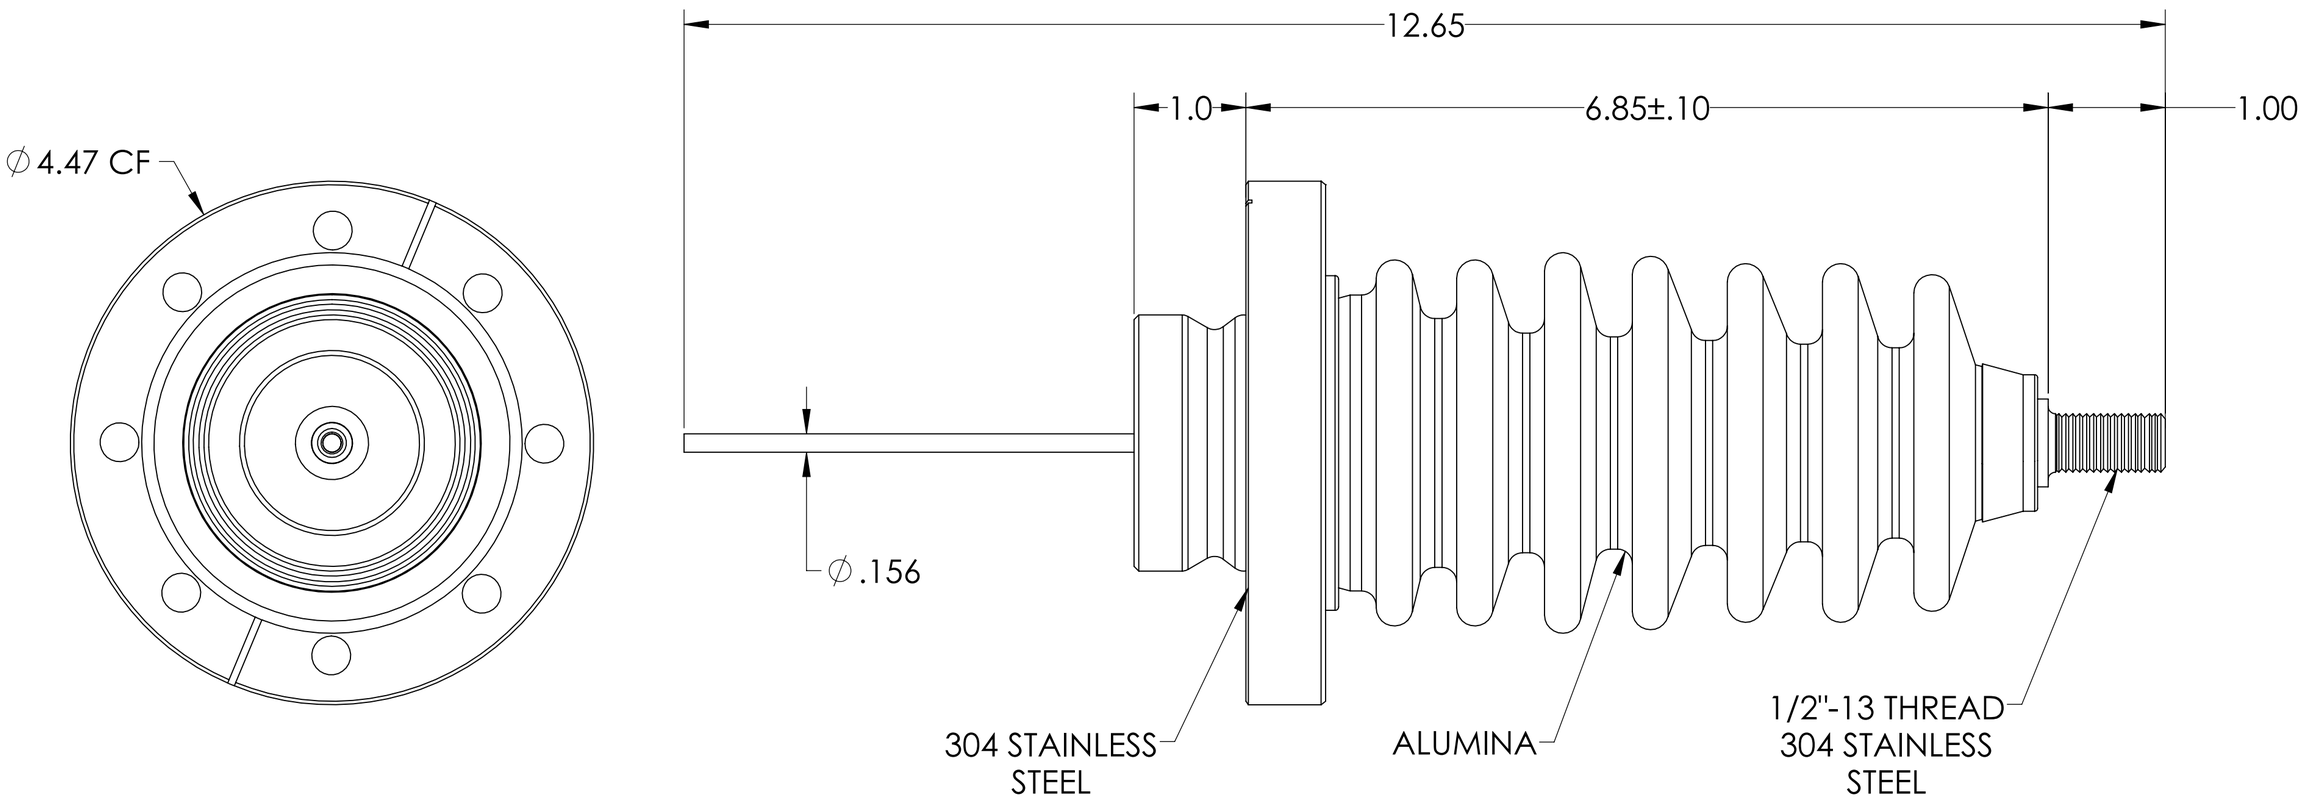

NOTE:
1. VOLTAGE: 60,000 VOLTS DC
2. CURRENT: 6.5 AMPS
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 60 KV, 1 Pin, 0.156" Stn. Stl. Conductor, 4.5" Conflat Flange, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION # N/A		
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015		NAME	DATE
	DRAWN	WJ	9/11/2015
	CHECKED		9/11/2015
	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		MPF PRODUCTS INC.
	APPLICATION NEXT ASSY / USED ON		TITLE: POWER FEEDTHROUGH, 60 KV, 1 PIN, 4.5" CONFLAT FLANGE
FINISH	SURFACE FINISH: 63 OR BETTER		DWG. NO. A3107-1-CF / REV
PLATING	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Wednesday, June 12, 2019 9:53:40 AM

DOWNLOADED FROM MPFPI.COM

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MPF PRODUCTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.