
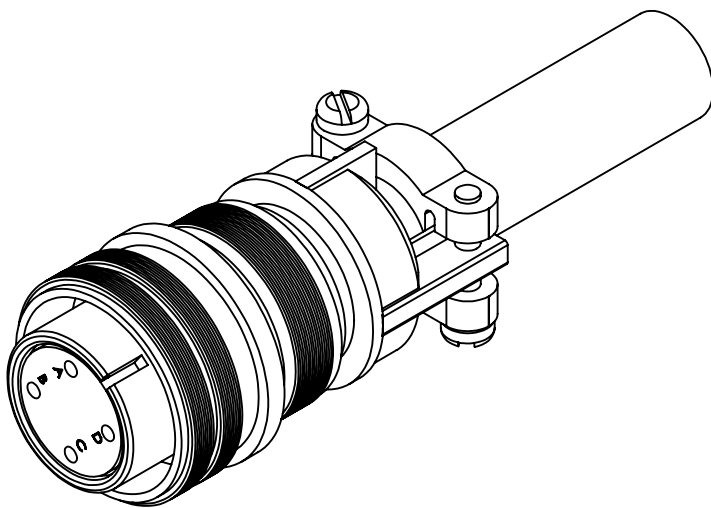
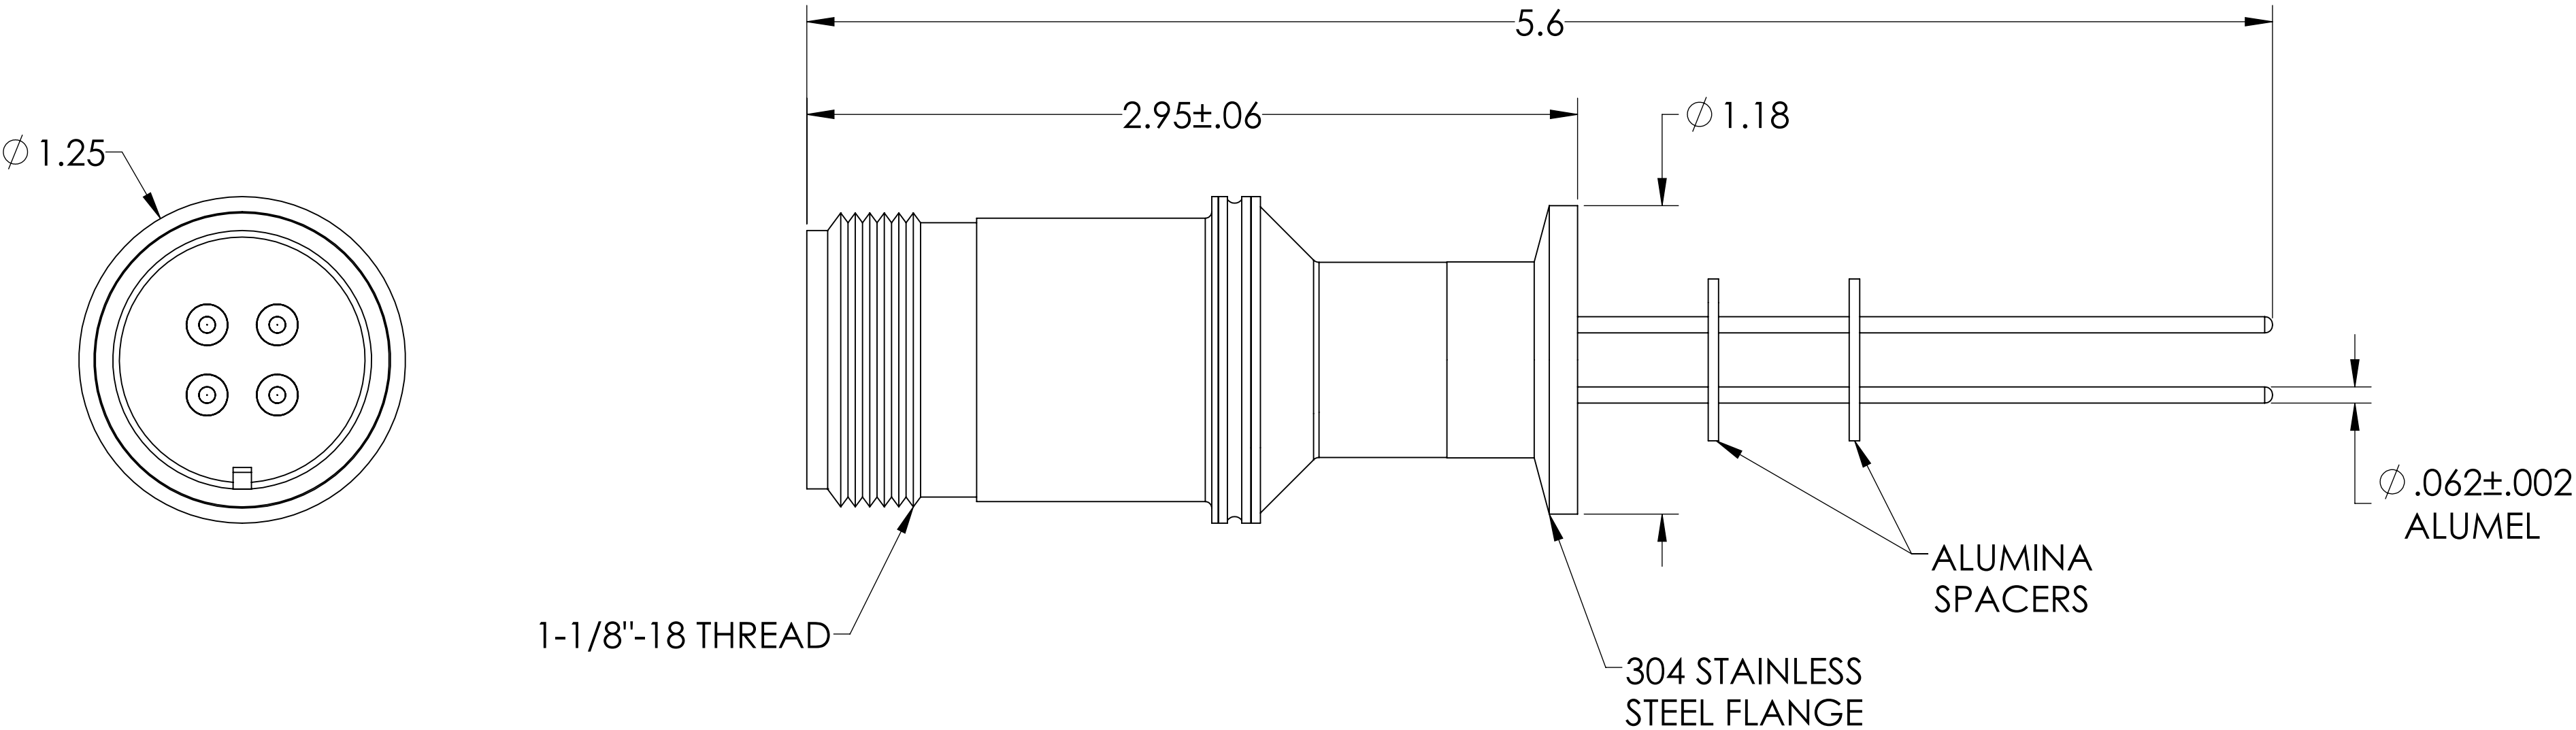
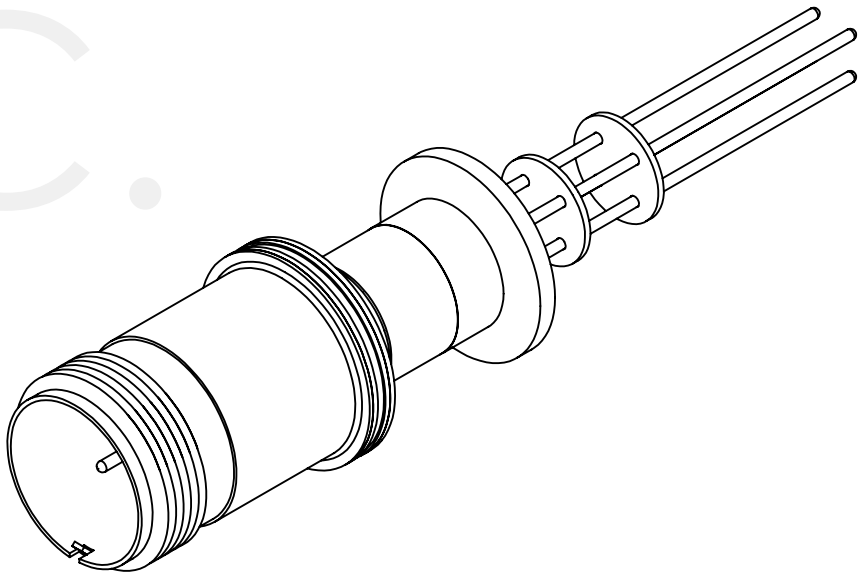



MPF PRODUCTS INC.



- SPECIFICATIONS:
- 1. VOLTAGE: 700 VOLTS DC
 - 2. CURRENT: 10 AMPS PER PIN, 28 AMPS FULL LOAD
 - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
 - 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 4 Pins, 700 Volts, 10 Amps per Pin, 0.062" Dia Conductors w/ Air-side Connector, 1.18" QF/KF

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
		THIRD ANGLE:			
MATERIAL				MULTIPIN, 4 PINS, 700V, 10A, 1.18" QF/KF	
		APPLICATION			
		NEXT ASSY USED ON			
FINISH		SURFACE FINISH:  63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO.	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A3511-1-QF	
				REV	
				Monday, January 28, 2019 1:24:47 PM	