
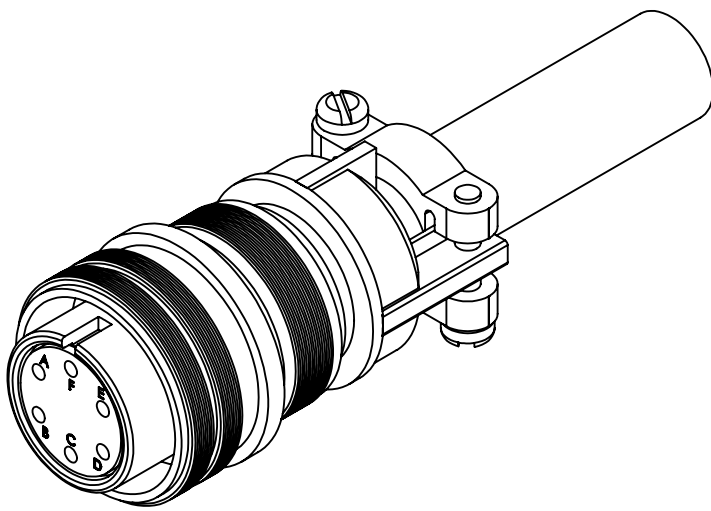
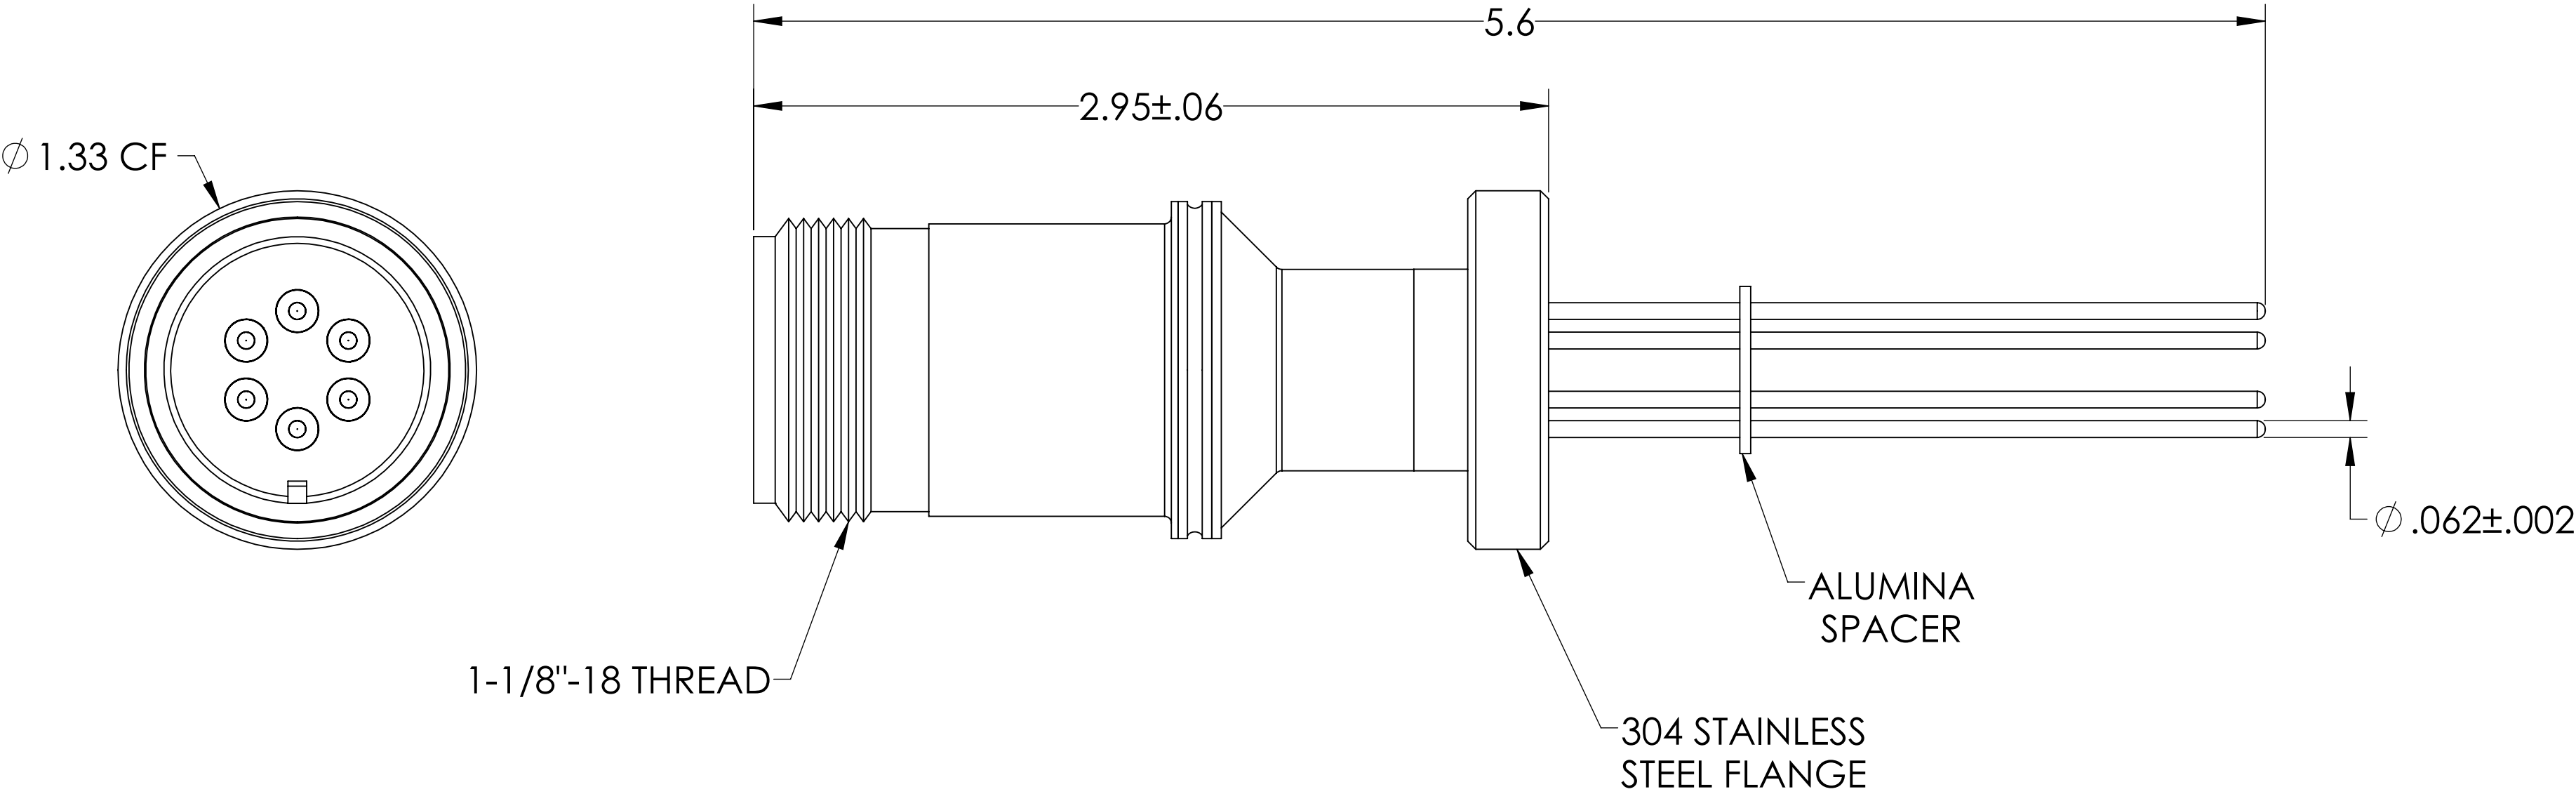




MPF PRODUCTS INC.

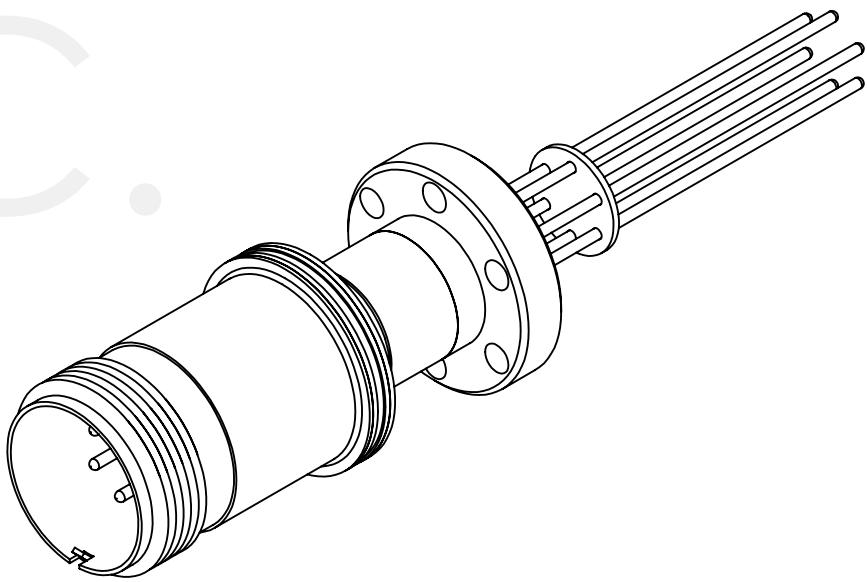

SPECIFICATIONS:

- 1. VOLTAGE: 700 VOLTS DC
- 2. CURRENT: 10 AMPS PER PIN, 36 AMPS FULL LOAD
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 6 Pins, 700 Volts, 10 Amps per Pin, 0.062" Dia Conductors w/ Air-side Connector, 1.33" Conflat Flange

| | | | | | |
|--|--|---|------|-----------|---|
| UNLESS OTHERWISE SPECIFIED: | | QUOTATION # | | N/A | |
| DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 | | | NAME | DATE | MPF PRODUCTS INC. |
| | | DRAWN | WJ | 9/11/2015 | |
| | | CHECKED | | 9/11/2015 | |
| | | ENG APPR. | WJ | 9/11/2015 | |
| MATERIAL | | THIRD ANGLE: | | | TITLE: MULTIPIN, 6 PINS, 700V, 10A, 133CF |
| | |  | | | |
| | | APPLICATION | | | |
| | | NEXT ASSY USED ON | | | |
| FINISH | | SURFACE FINISH: | | | DOWNLOADED FROM MPFPI.COM |
| | |  OR BETTER | | | |
| PLATING | | UNLESS OTHERWISE SPECIFIED: | | | DWG. NO. REV |
| | | ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | | |
| | | | | | A3514-1-CF |
| | | | | | Monday, January 28, 2019 1:40:12 PM |