
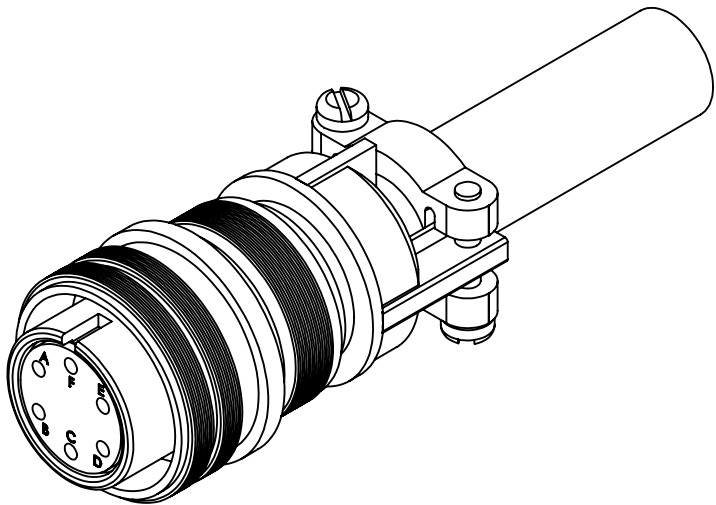
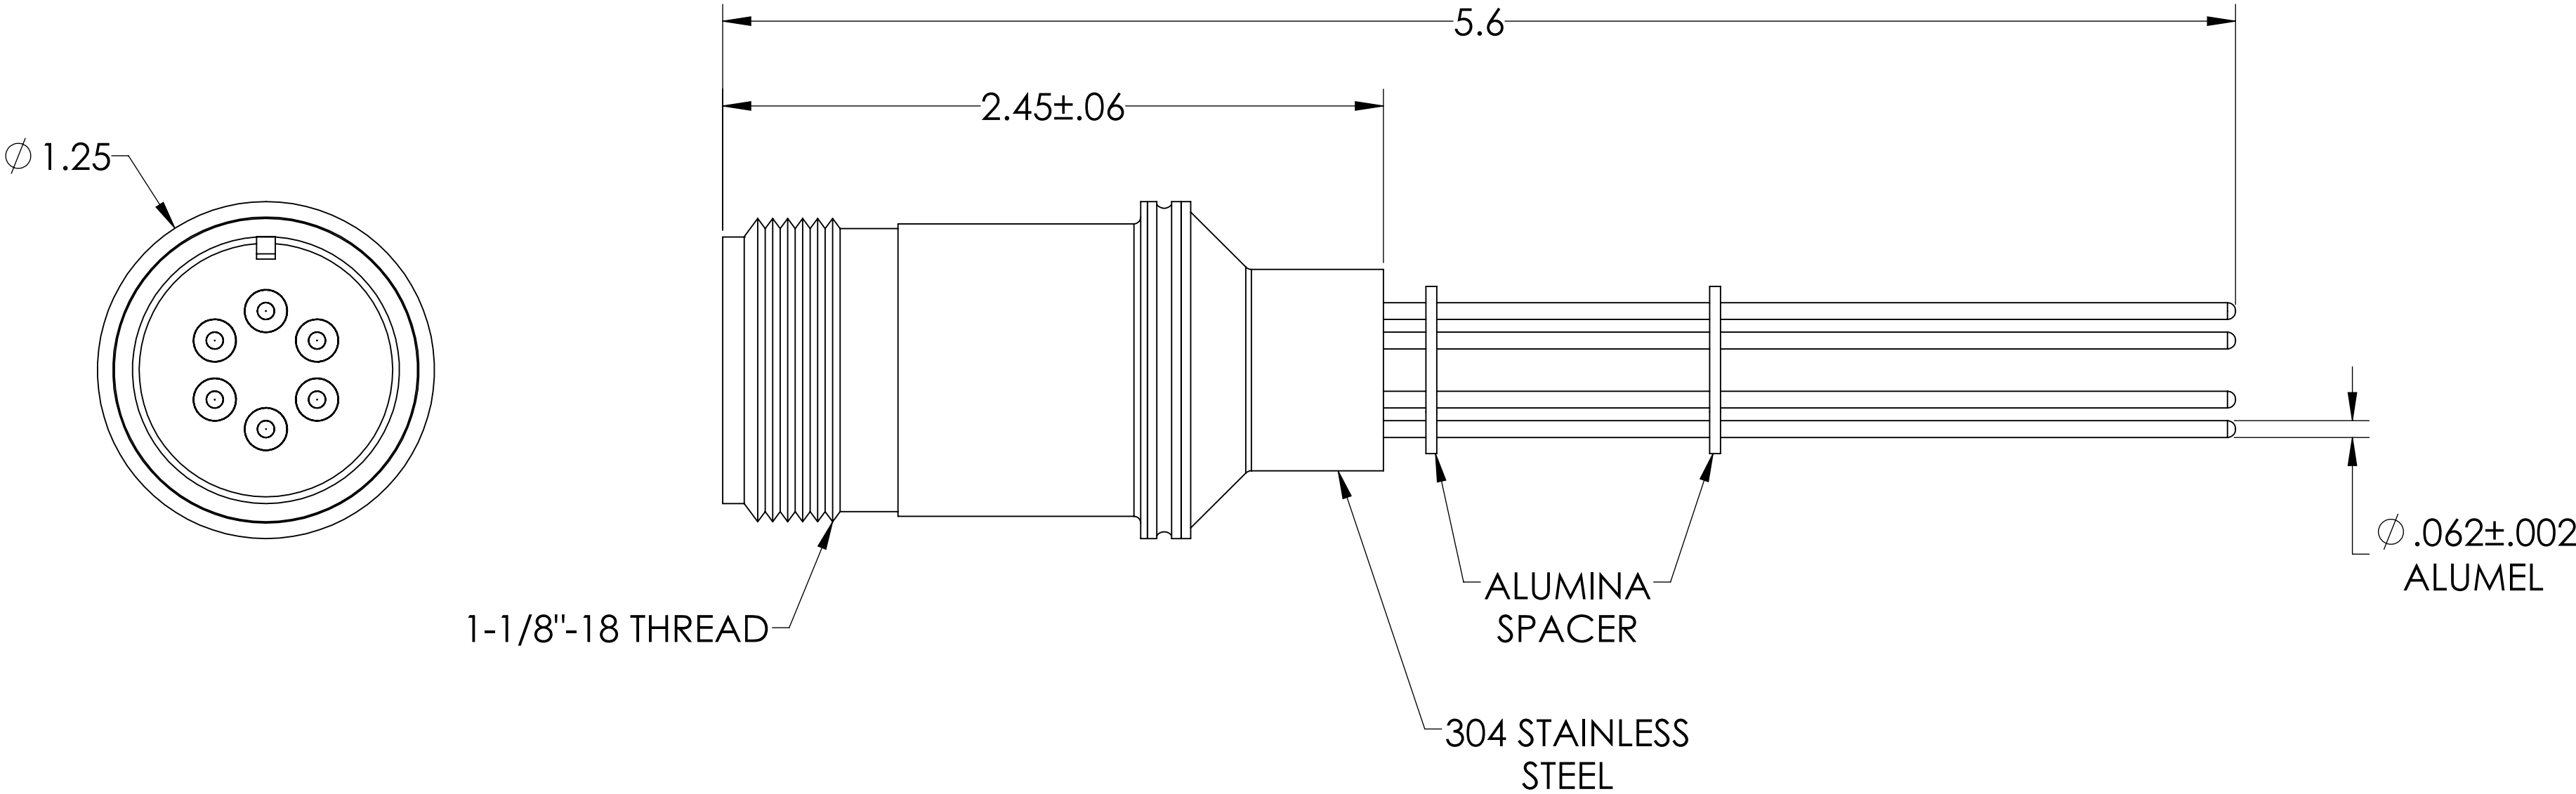
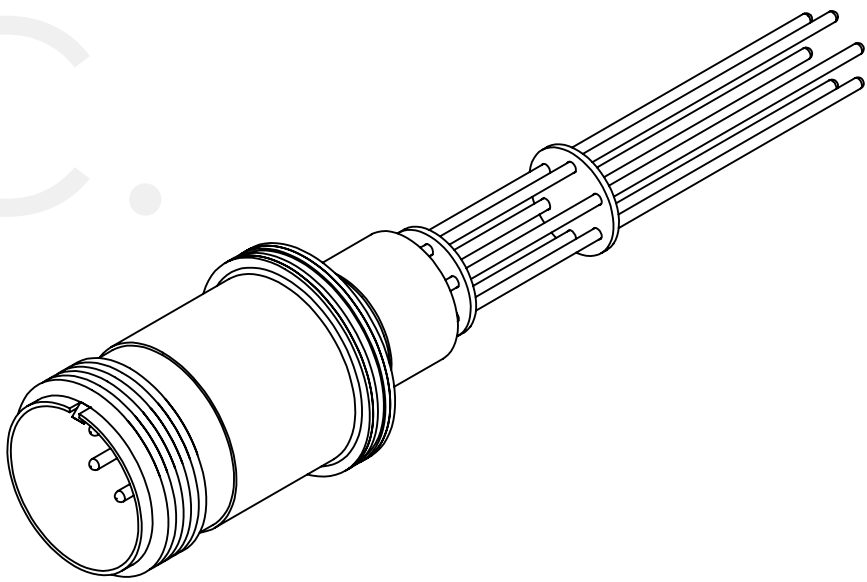


MPF PRODUCTS INC.



- SPECIFICATIONS:
- 1. VOLTAGE: 700 VOLTS DC
 - 2. CURRENT: 10 AMPS PER PIN, 36 AMPS FULL LOAD
 - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
 - 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 6 Pins, 700 Volts, 10 Amps per Pin, 0.062" Dia Conductors w/ Air-side Connector, 0.75" Weld Adapter

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC. TITLE: MULTIPIN, 6 PINS, 700V, 10A, .747" WELD ADAPTER DOWNLOADED FROM MPFPI.COM DWG. NO. A3526-1-W REV
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			
		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH:			Monday, January 28, 2019 1:50:42 PM
		63 OR BETTER			
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			