
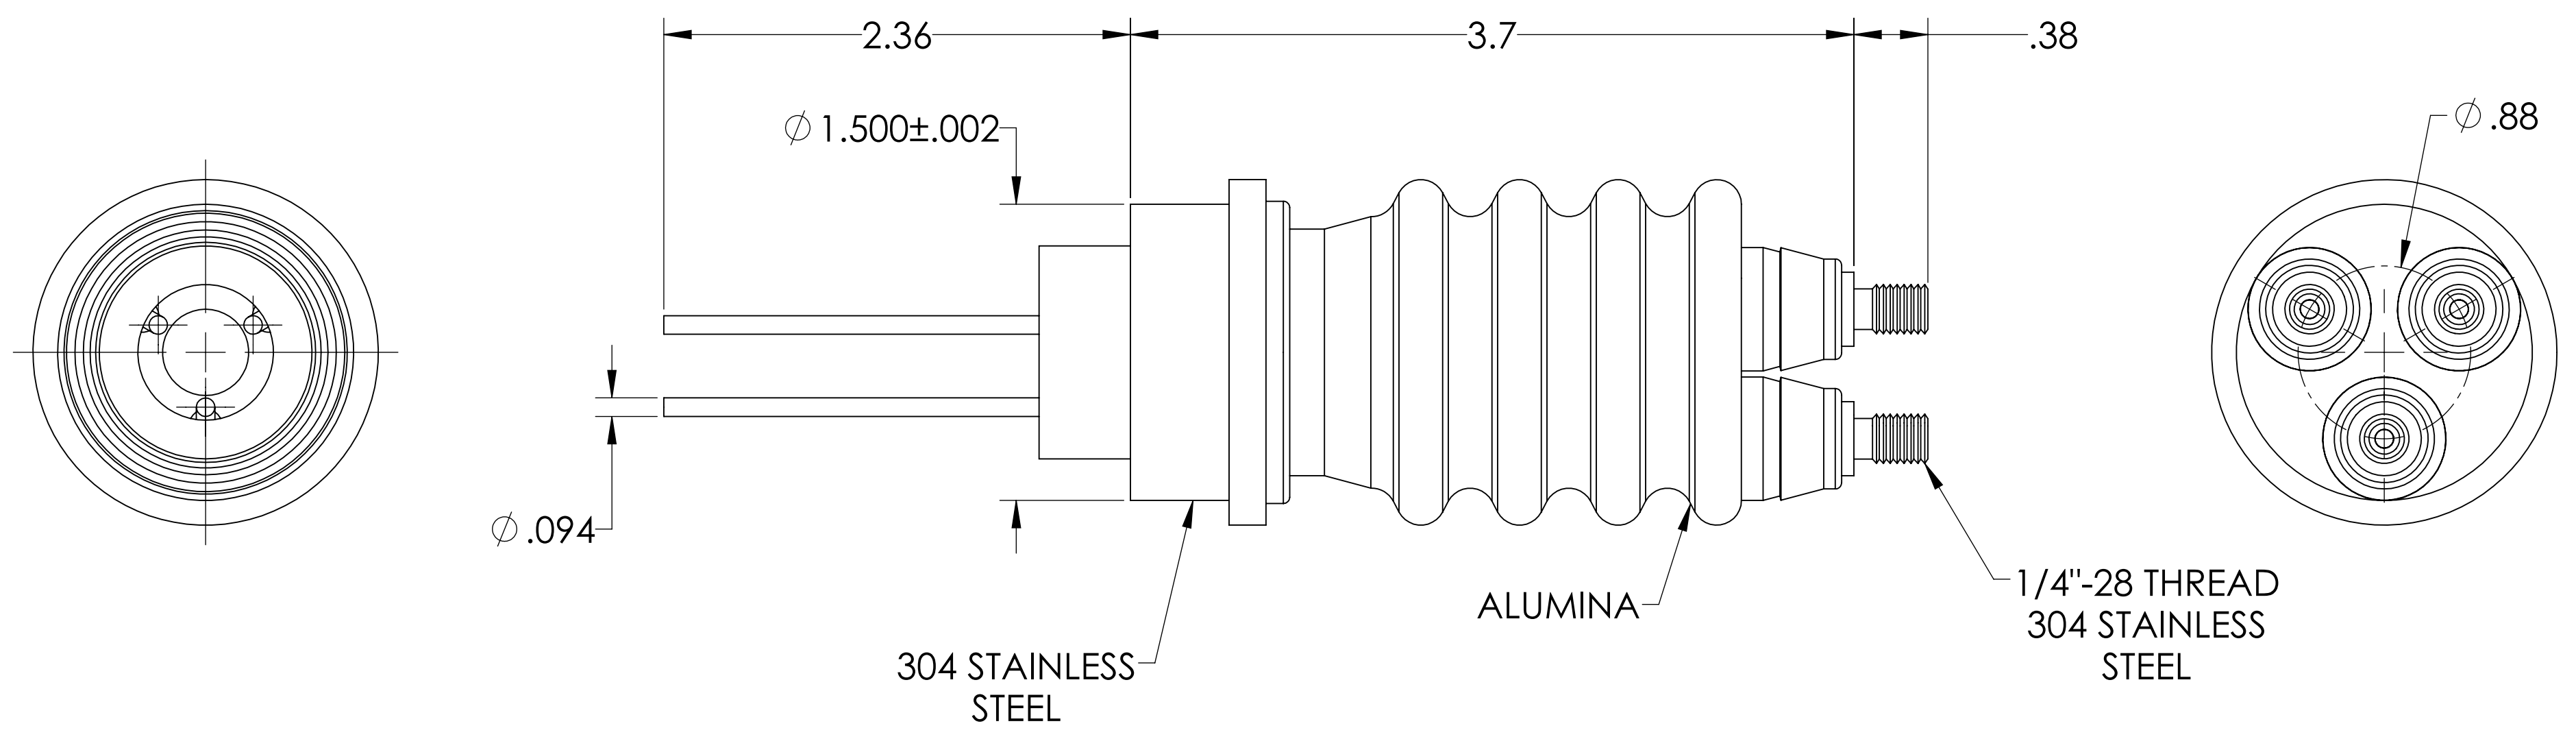


# MPF PRODUCTS INC.

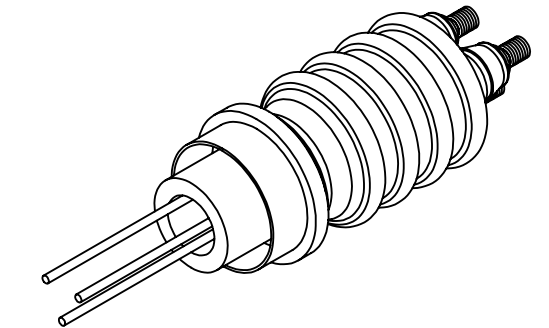

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A3882-1-W	OFHC COPPER	50 AMPS
A3882-4-W	304 STN STL	3 AMPS

- NOTE:**
- VOLTAGE: 25,000 VOLTS DC PIN TO GROUND, 3KV PIN TO PIN
  - CURRENT: 50 AMPS
  - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 25 KV, 3 Pins, 0.094" Conductor, 1.500" Dia. Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	<b>MPF PRODUCTS INC.</b>	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		<b>POWER FEEDTHROUGH, 25 KV, 3 PINS, 1.500" WELD ADAPTER</b>	
APPLICATION					
NEXT ASSY		USED ON			
FINISH	SURFACE FINISH: 63 OR BETTER	SURFACE FINISH: 63 OR BETTER		DOWNLOADED FROM MPFPI.COM	REV
PLATING	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO.	A3882
				Tuesday, January 22, 2019 1:03:18 PM	