


MPF PRODUCTS INC.

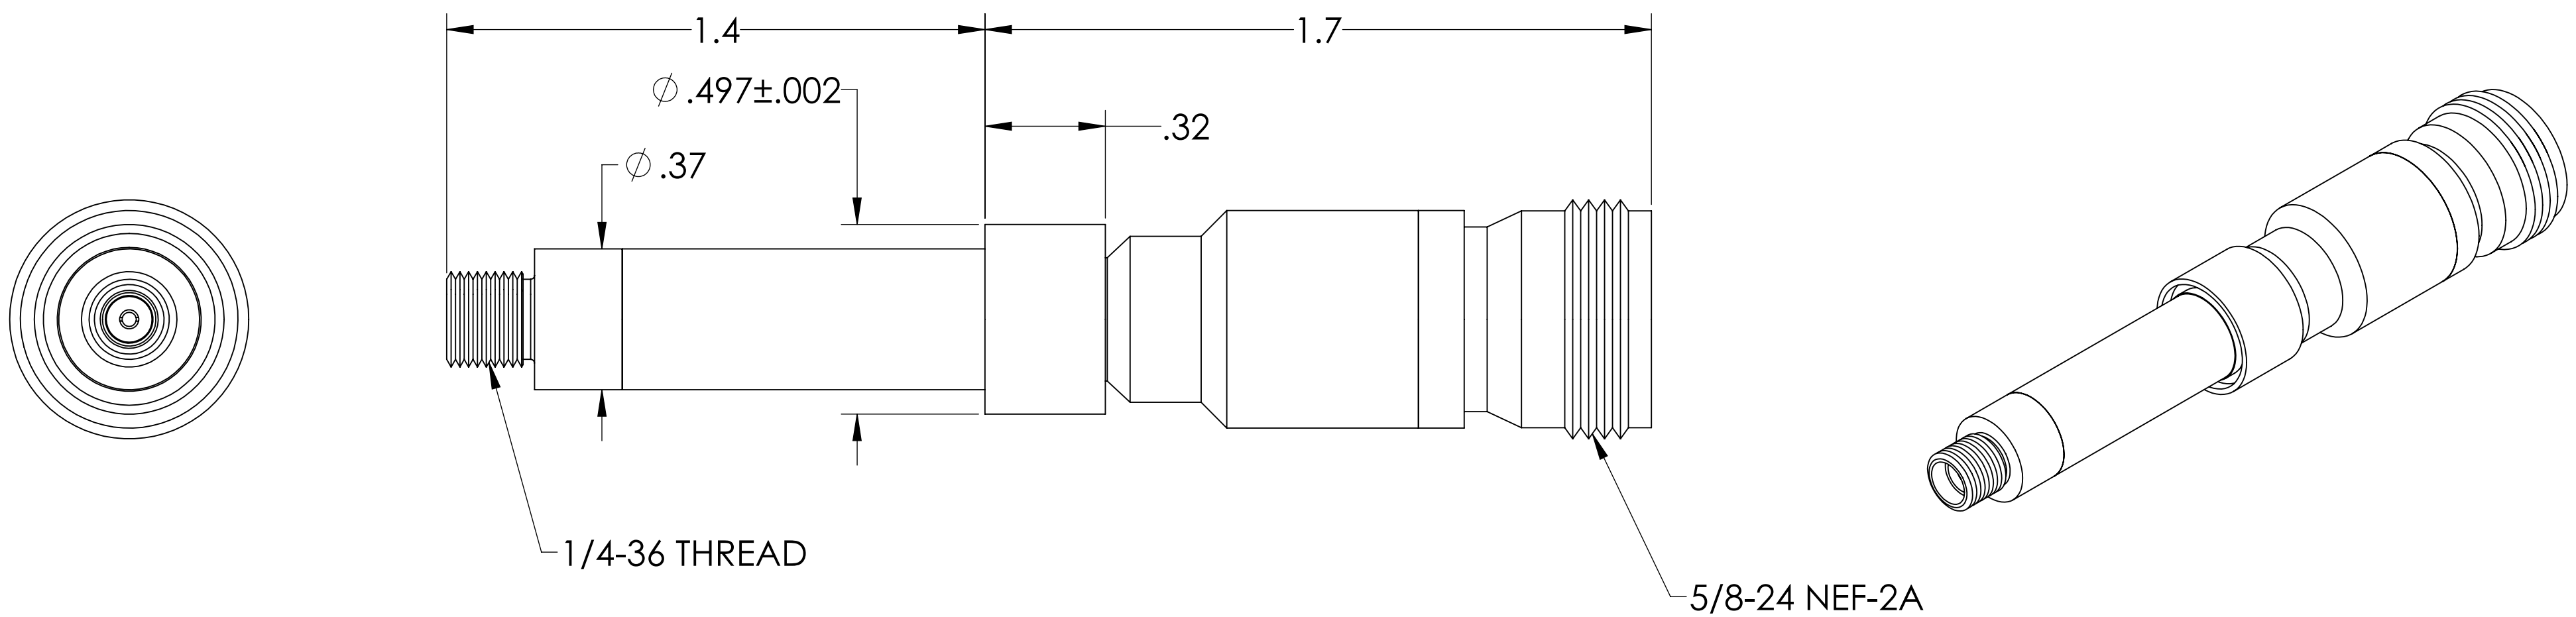

PART #	AIRSIDE CONNECTOR INCLUDED
A3888-1-W	YES
A3888-2-W	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: 50 OHM

Type-N/SMA Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.497" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH $\pm 1/2^\circ$	DRAWN	9/11/2015	
TWO PLACE DECIMAL $\pm .030$	CHECKED	9/11/2015	
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	9/11/2015	
MATERIAL	THIRD ANGLE:		TITLE: TYPE-N/SMA COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 0.497" WELD ADAPTER
	APPLICATION		
	NEXT ASSY	USED ON	
FINISH	SURFACE FINISH: $\sqrt{32}$ OR BETTER		DOWNLOADED FROM MPFPI.COM
PLATING	UNLESS OTHERWISE SPECIFIED:		DWG. NO. A3888 REV
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Friday, January 18, 2019 10:22:47 AM