


MPF PRODUCTS INC.

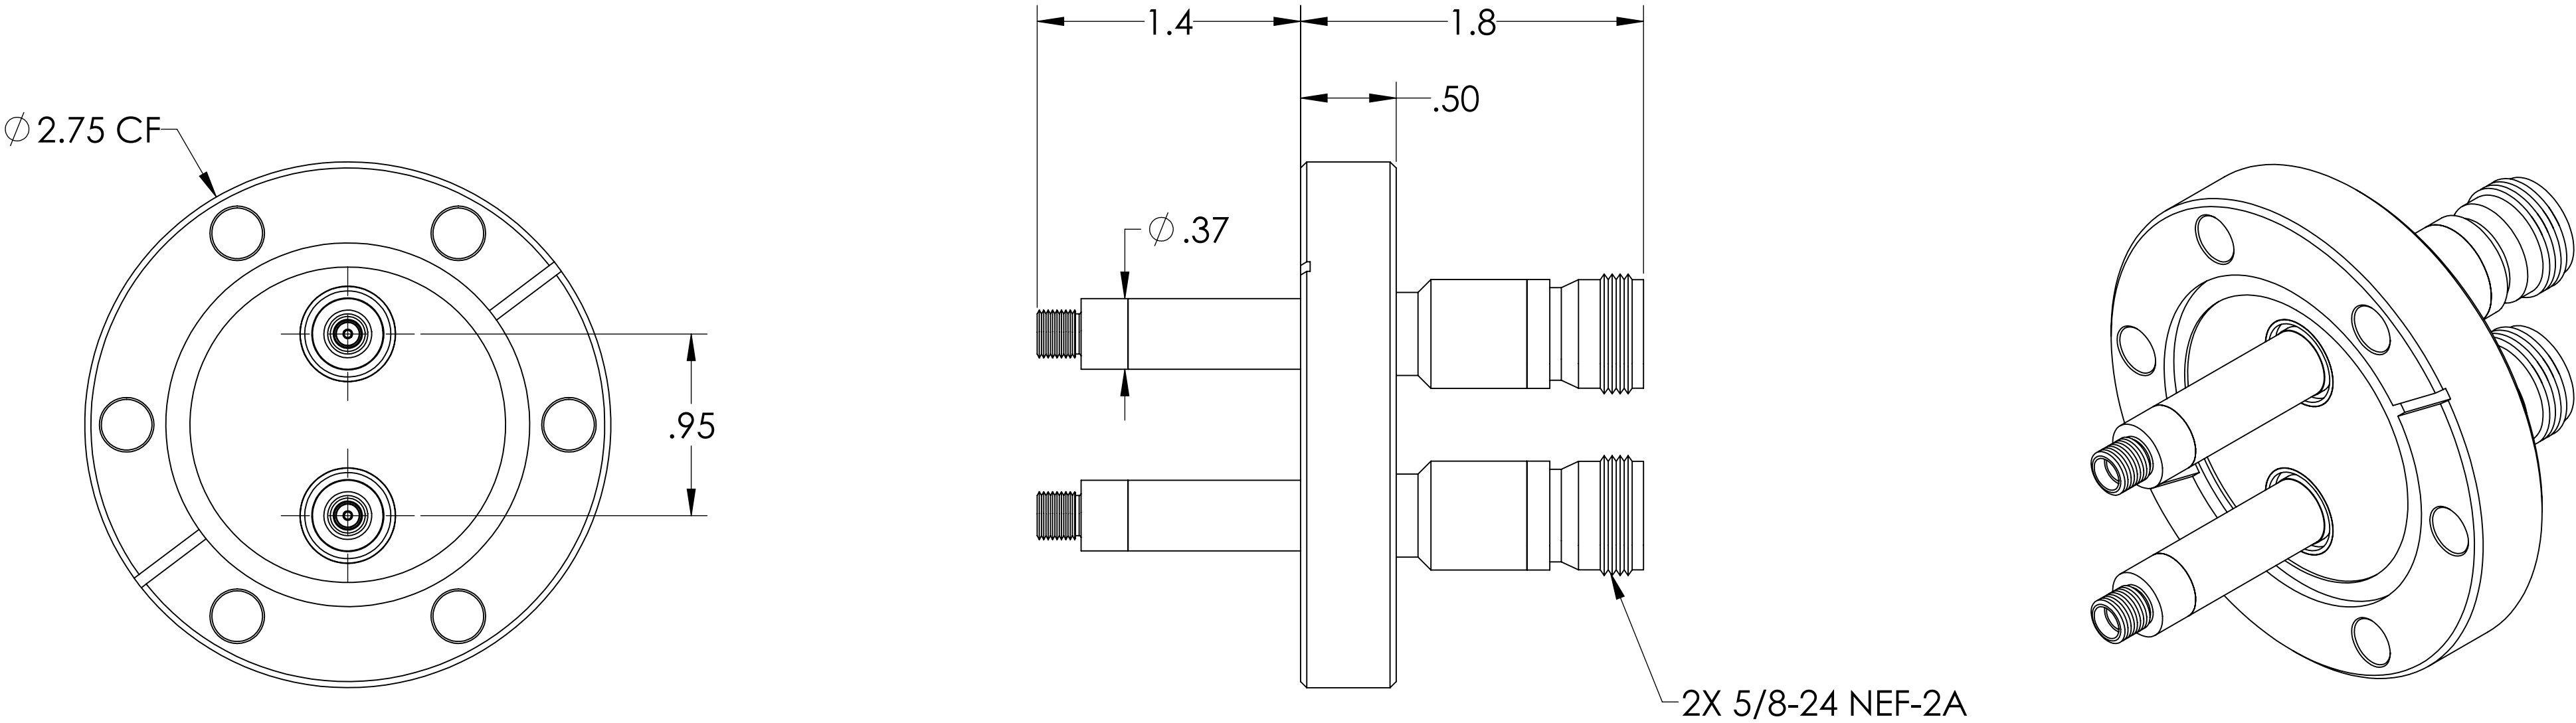

PART #	AIRSIDE CONNECTOR INCLUDED
A3892-1-CF	YES
A3892-2-CF	NO

- NOTE:
- 1. SHIELD: GROUNDED
  - 2. VOLTAGE: 500 VOLTS DC
  - 3. CURRENT: 3 AMP
  - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C ( AIRSIDE CONNECTOR)
  - 5. IMPEDANCE: 50 OHM

Type-N/SMA Coaxial Feedthrough, 2 Pins, Grounded Shield, 2.75" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	9/11/2015	
MATERIAL	THIRD ANGLE:		TITLE: TYPE-N/SMA COAXIAL FEEDTHROUGH, 2 PINS, GROUNDED SHIELD, 2.75" CONFLAT FLANGE
	APPLICATION		
	NEXT ASSY USED ON		
FINISH	SURFACE FINISH: 63/ OR BETTER		DOWNLOADED FROM MPFPI.COM
PLATING	UNLESS OTHERWISE SPECIFIED:		DWG. NO. A3892
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV

Wednesday, October 10, 2018 8:09:02 AM