
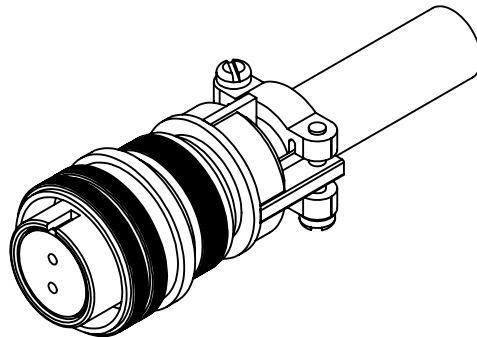
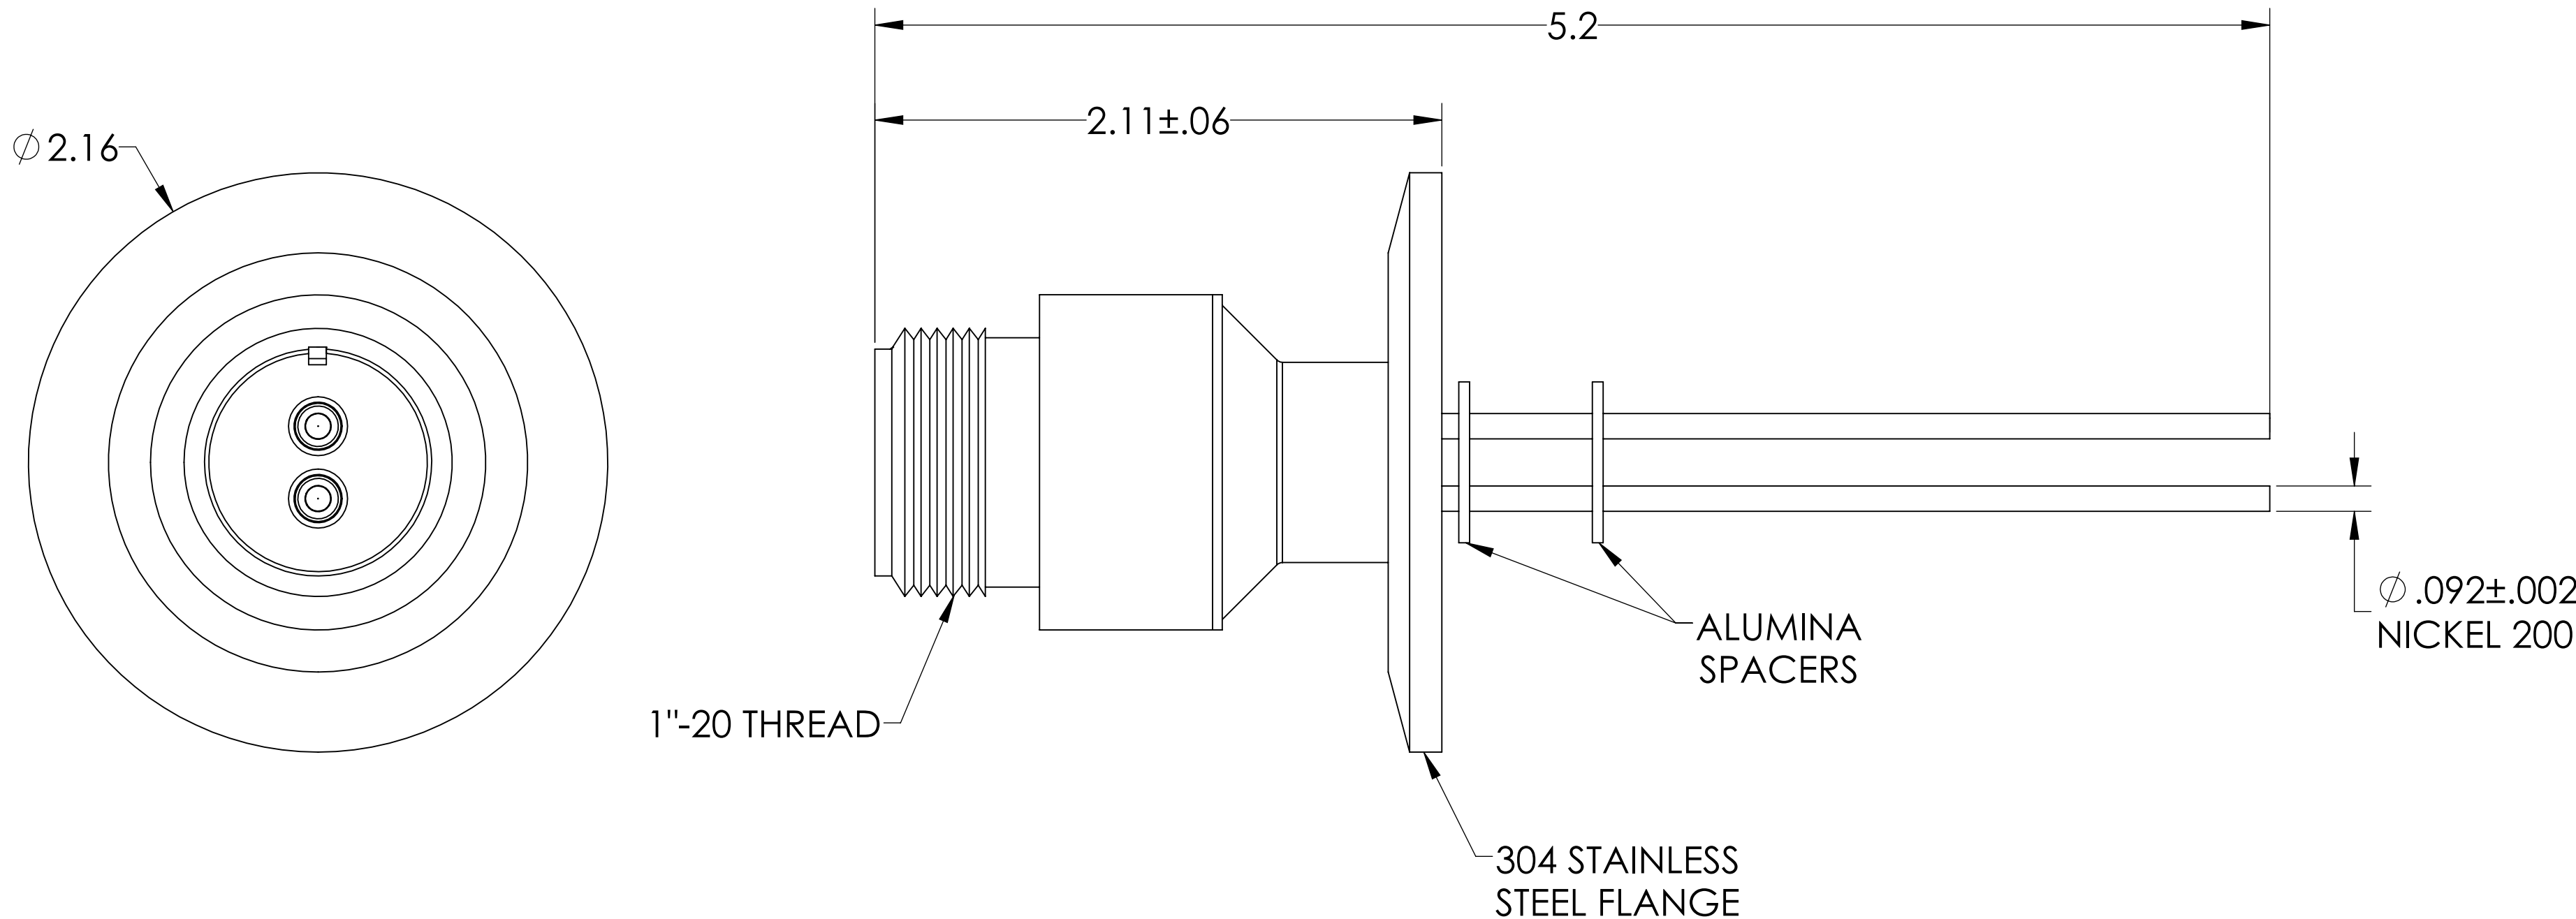
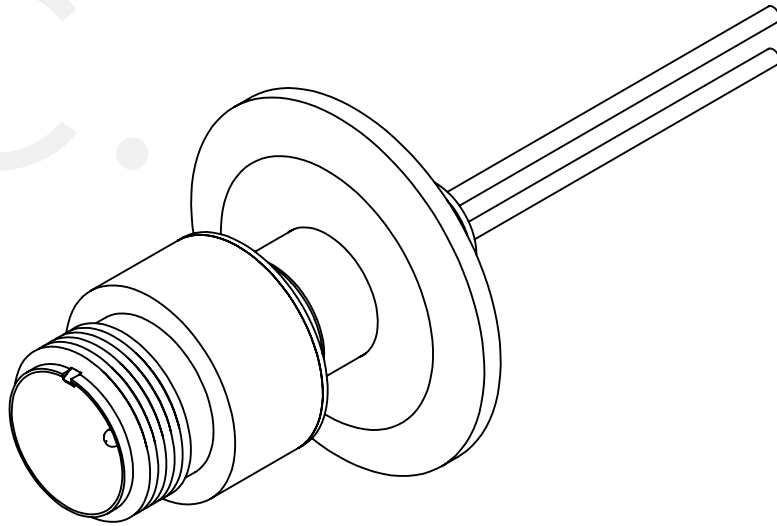



MPF PRODUCTS INC.



- SPECIFICATIONS:
- 1. VOLTAGE: 700 VOLTS DC
 - 2. CURRENT: 16 AMPS PER PIN
 - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
 - 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough w/ Air-side Connector, 2 Pins, 700 Volts, 16 Amps per Pin, 0.092" Nickel Conductors, 2.16" QF/KF

| | | | | | |
|---|--|--|------|-----------|---|
| UNLESS OTHERWISE SPECIFIED: | | QUOTATION # | | N/A | |
| DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 | | | NAME | DATE | MPF PRODUCTS INC. TITLE: MULTIPIN, 2 PINS, 700V, 16A, 2.16" QF/KF DOWNLOADED FROM MPFPI.COM DWG. NO. A3992-1-QF REV |
| | | DRAWN | WJ | 9/11/2015 | |
| | | CHECKED | | 9/11/2015 | |
| | | ENG APPR. | WJ | 9/11/2015 | |
| | | THIRD ANGLE: | | | |
| MATERIAL | |  | | | |
| | | APPLICATION | | | |
| | | NEXT ASSY | | USED ON | |
| | | | | | |
| | | | | | |
| FINISH | | SURFACE FINISH:  63 OR BETTER | | | |
| PLATING | | UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | | |
| Monday, January 28, 2019 3:48:07 PM | | | | | |