



MPF PRODUCTS INC.

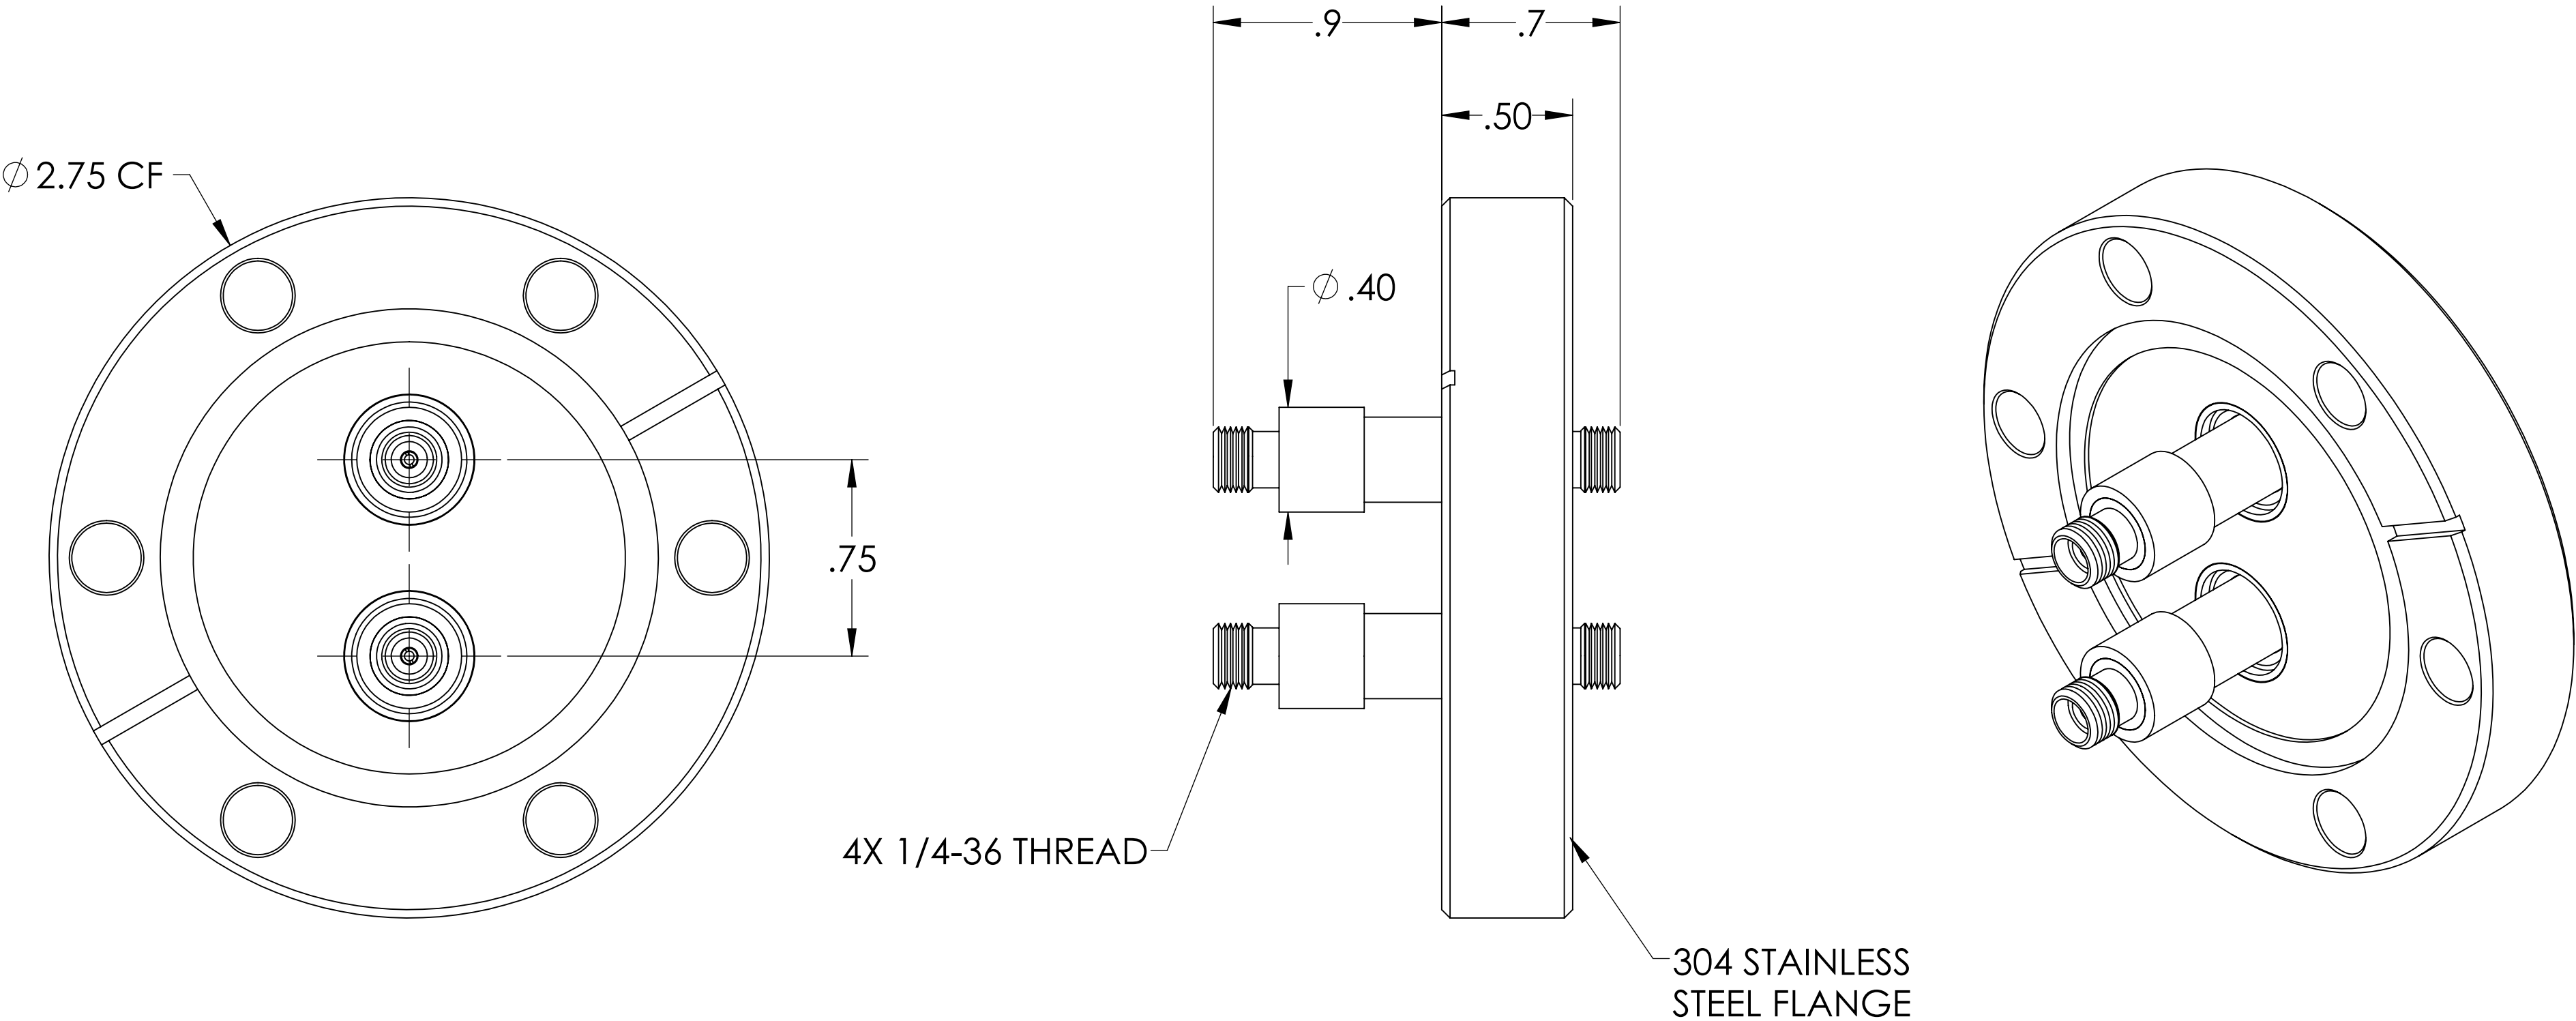

PART #	AIRSIDE CONNECTOR INCLUDED
A4076-1-CF	YES
A4076-2-CF	NO

- NOTE:
1. SHIELD: GROUNDED
 2. VOLTAGE: 700 VOLTS DC
 3. CURRENT: 1 AMP
 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 5. IMPEDANCE: 50 OHM

SMA Coaxial Feedthrough, 50 Ohm 2 Pins, Grounded Shield, Double Ended, 2.75" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	WJ	DATE	9/11/2015
ANGULAR: MACH $\pm 1/2^\circ$		CHECKED		9/11/2015	
TWO PLACE DECIMAL $\pm .030$		ENG APPR.	WJ	9/11/2015	
THREE PLACE DECIMAL $\pm .015$		THIRD ANGLE:			
MATERIAL		APPLICATION			
		NEXT ASSY		USED ON	
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
		TITLE:		SMA COAXIAL FEEDTHROUGH, 50 OHM, 2 PINS, GROUNDED SHIELD, DOUBLE ENDED, 2.75" CONFLAT FLANGE	
		DWG. NO.		A4076	
		REV			
		Friday, January 18, 2019 10:22:01 AM			