


MPF PRODUCTS INC.

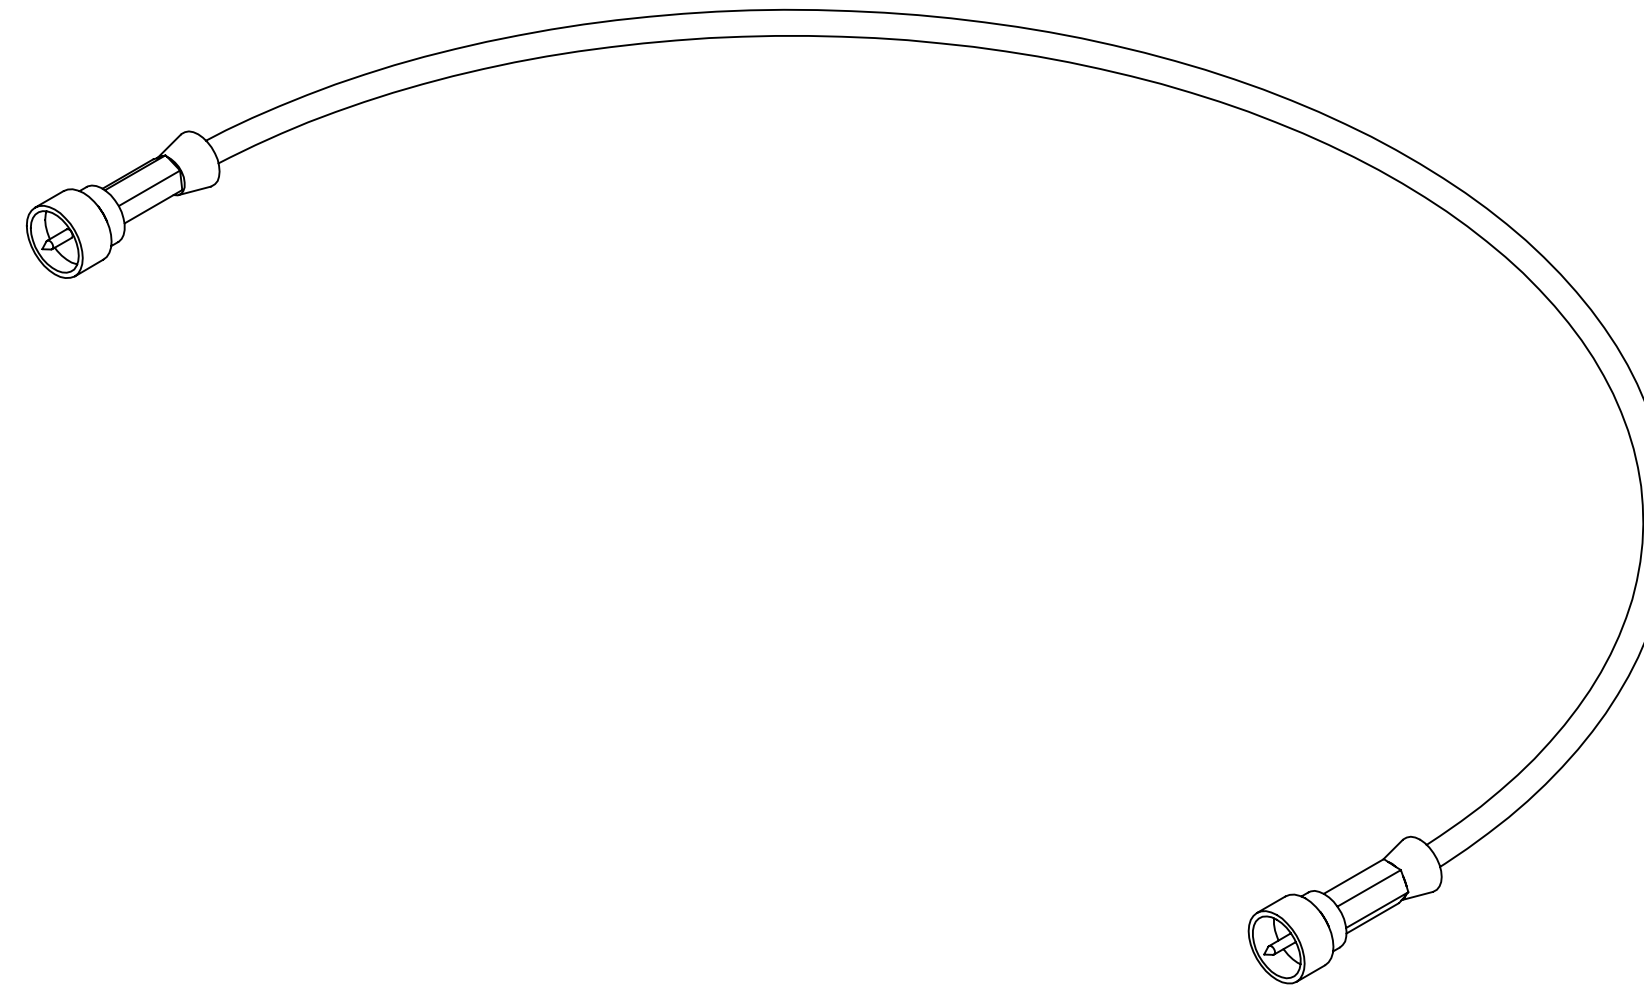

PART #	LENGTH
A4863-1-CN	10"
A4863-2-CN	30"
A4863-3-CN	12"
A4863-4-CN	24"
A4863-5-CN	36"

RATINGS:

1. IMPEDANCE: 50 OHMS
2. DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS AT SEA LEVEL
3. CONTACT RESISTANCE: 3 MILLIOHMS MAX D.C.
4. CURRENT CAPACITY: 3 AMPS D.C.
5. INSULATION RESISTANCE: 5 X 10⁽⁻³⁾ MEGAOHMS MIN. AT 500V D.C.
6. VSWR: 1.2 MAX - 2 GHZ
7. TEMPERATURE RATING: -62°C TO 150°C

Microdot Coaxial Connector/Cable, In-Vacuum, 500 Volts, 2 Amps

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC. TITLE: MICRODOT TO MICRODOT VACUUM SIDE CABLE	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:			
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH:		63/ OR BETTER		DOWNLOADED FROM MPFPI.COM	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO.	REV
				A4863	
				Thursday, February 14, 2019 8:41:39 AM	