

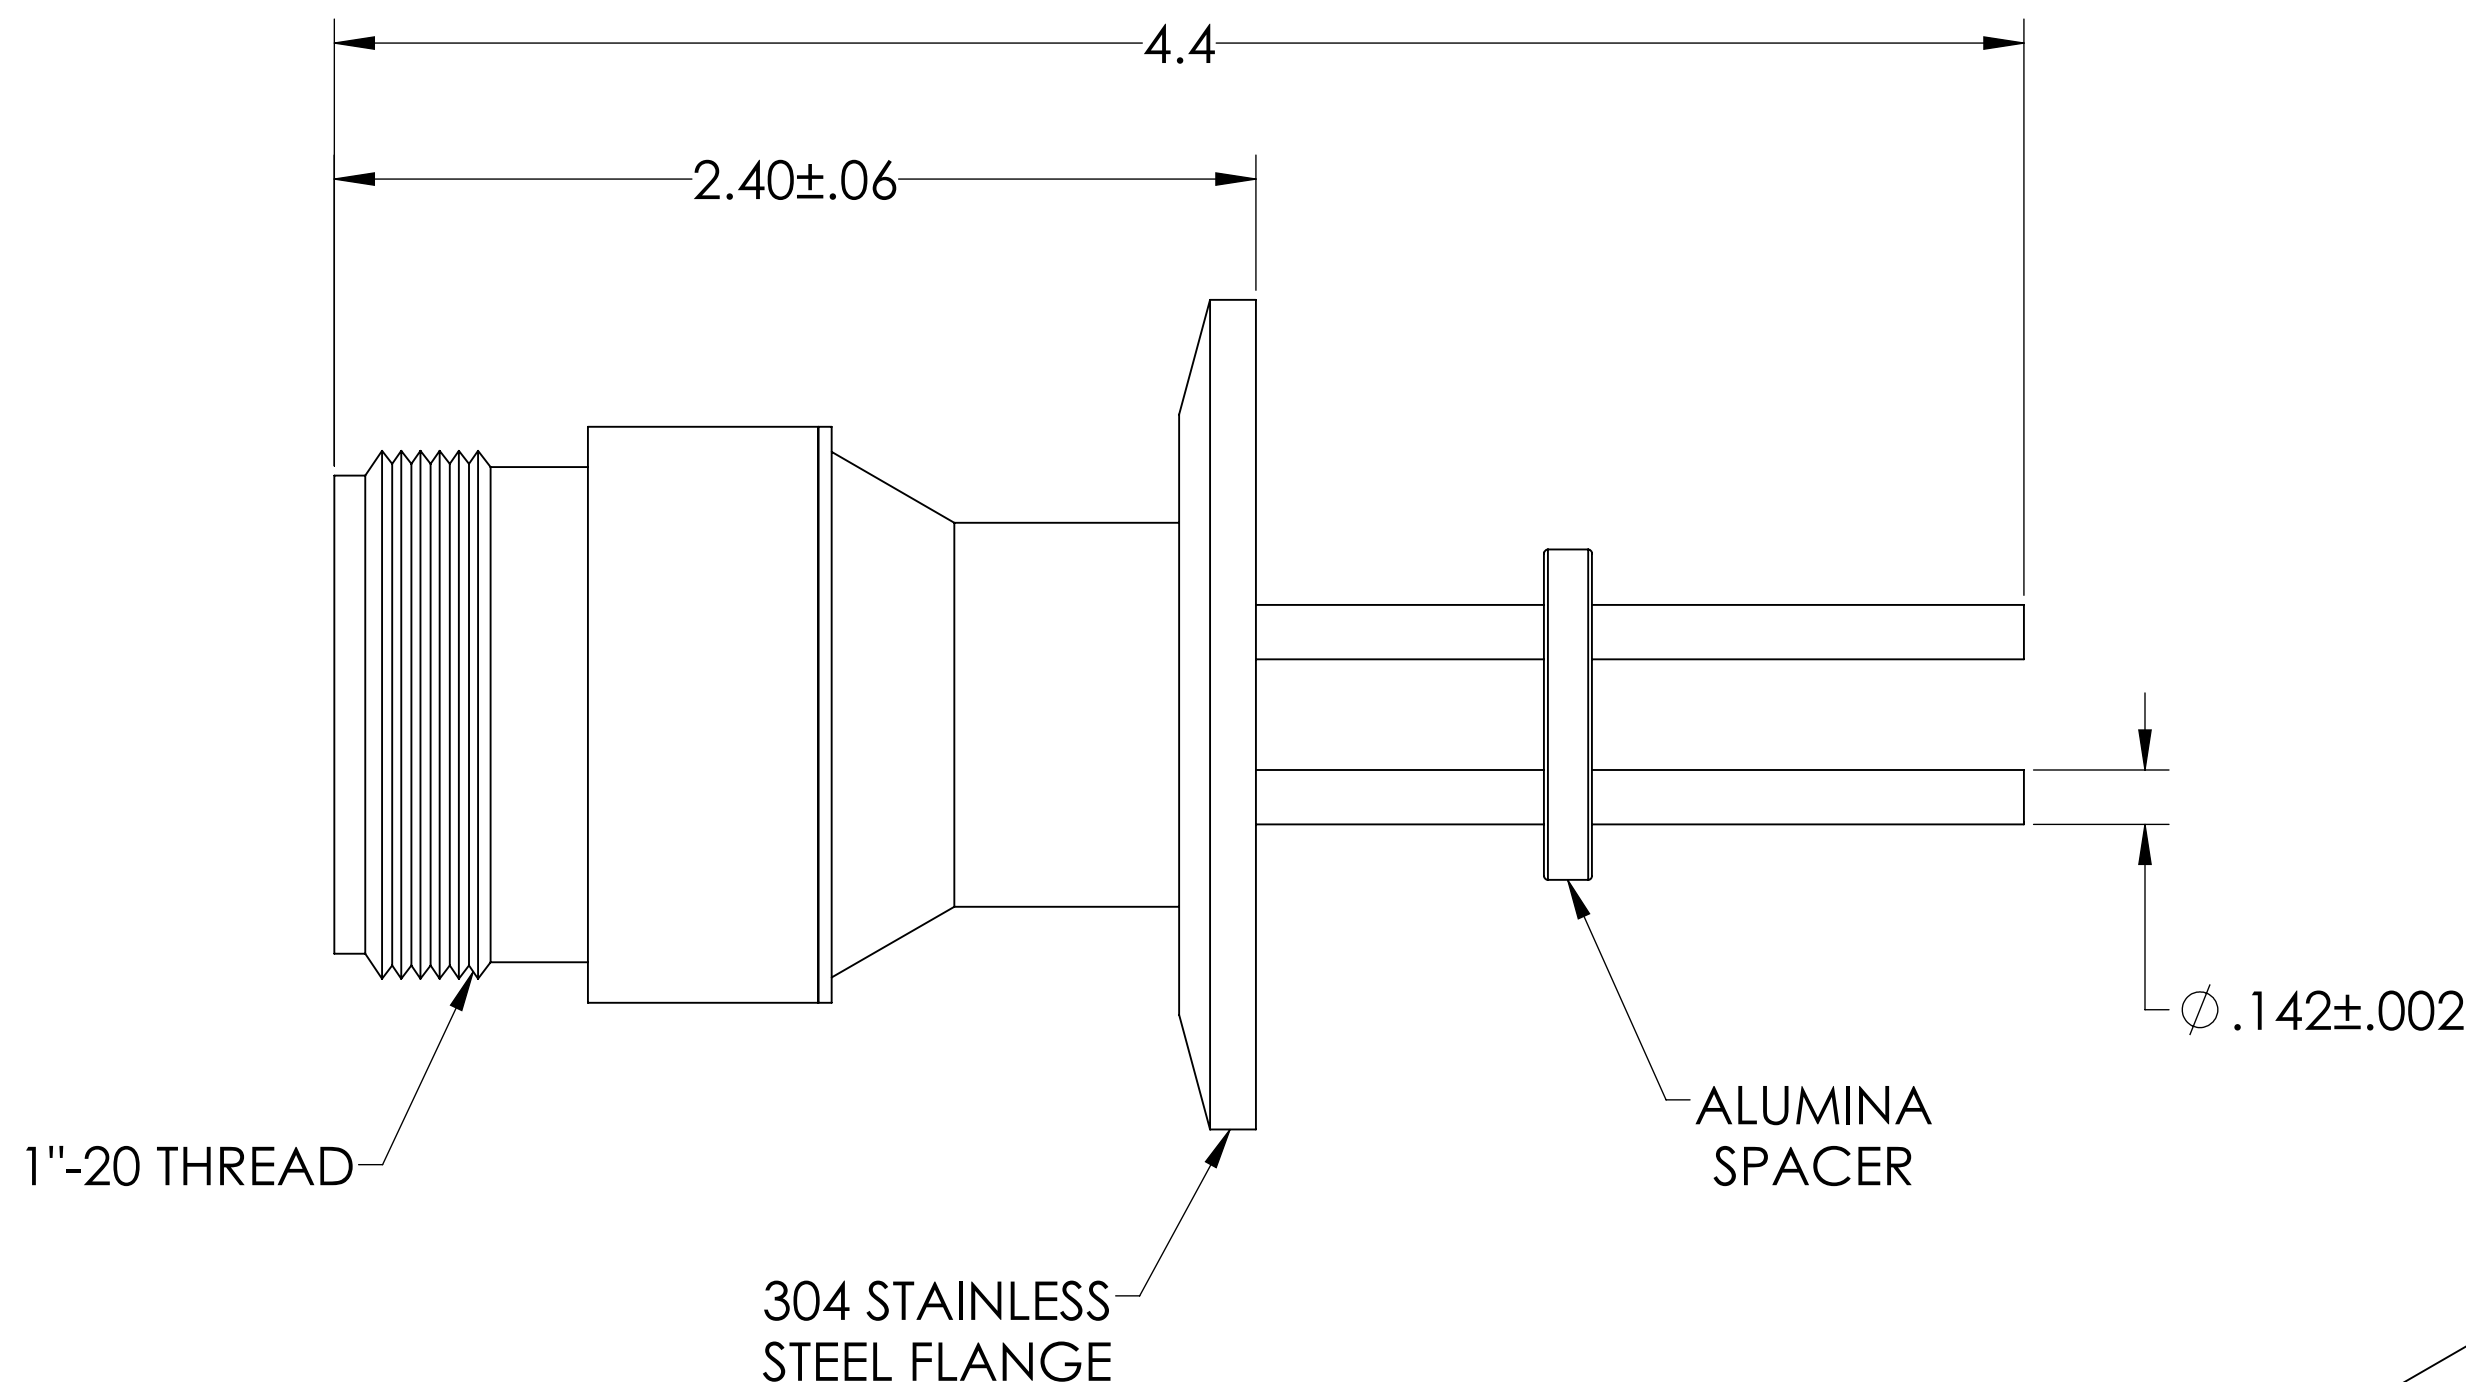
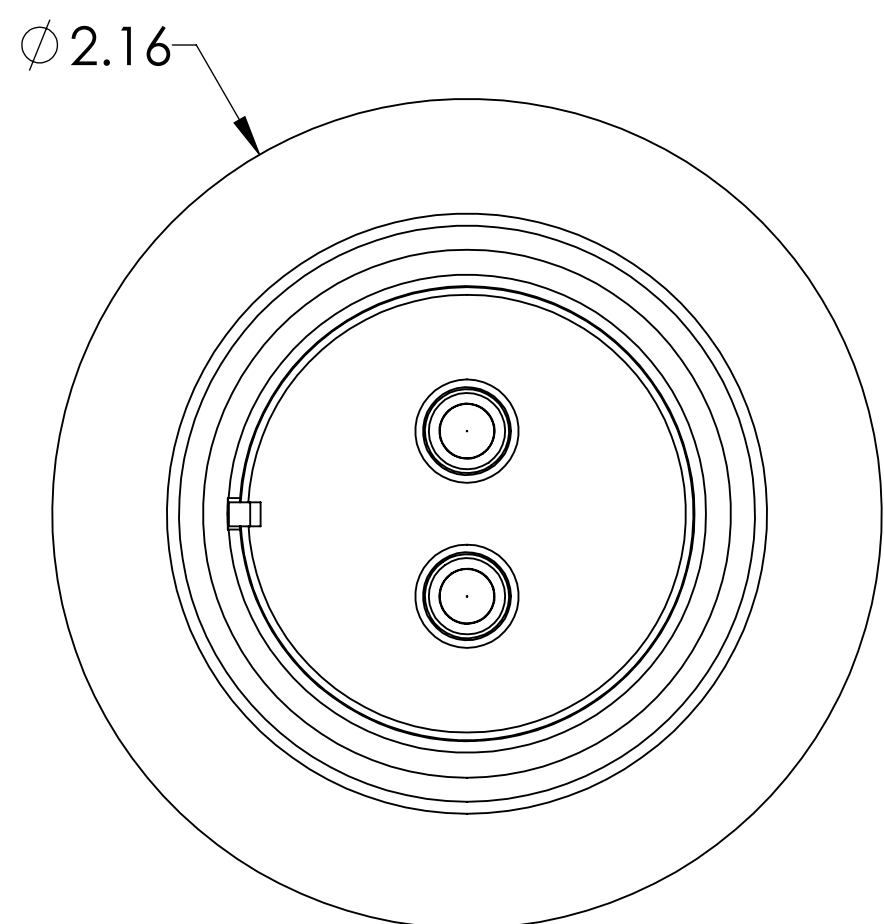


MPF PRODUCTS INC.

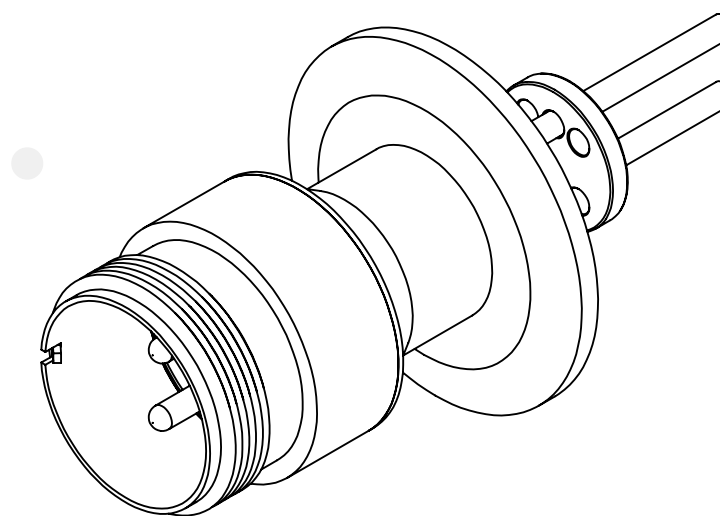

PART #	CONDUCTOR MATERIAL	CURRENT RATING PER PIN
A5078-1-QF	MOLYBDENUM	40 AMPS
A5078-3-QF	NICKEL 200	25 AMPS

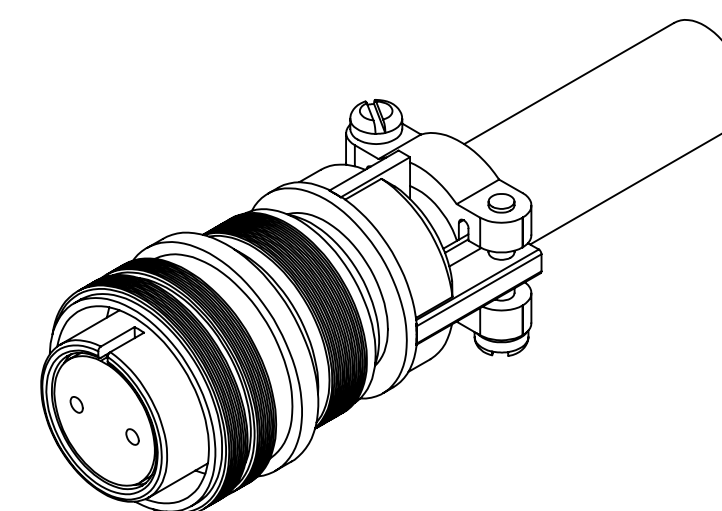

SPECIFICATIONS:

1. VOLTAGE: 700 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough w/ Air-side Connector, 2 Pins, 700 Volts, 0.142" Conductors, 2.16" QF/KF

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	TITLE:
FINISH	APPLICATION	MULTIPIN, 2 PINS, 700V, 2.16" QF/KF
PLATING	NEXT ASSY	USED ON
	SURFACE FINISH:	63 OR BETTER
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES
	DWG. NO.	A5078
	REV	
	Downloaded from MPFPI.COM	Tuesday, January 29, 2019 8:48:45 AM