
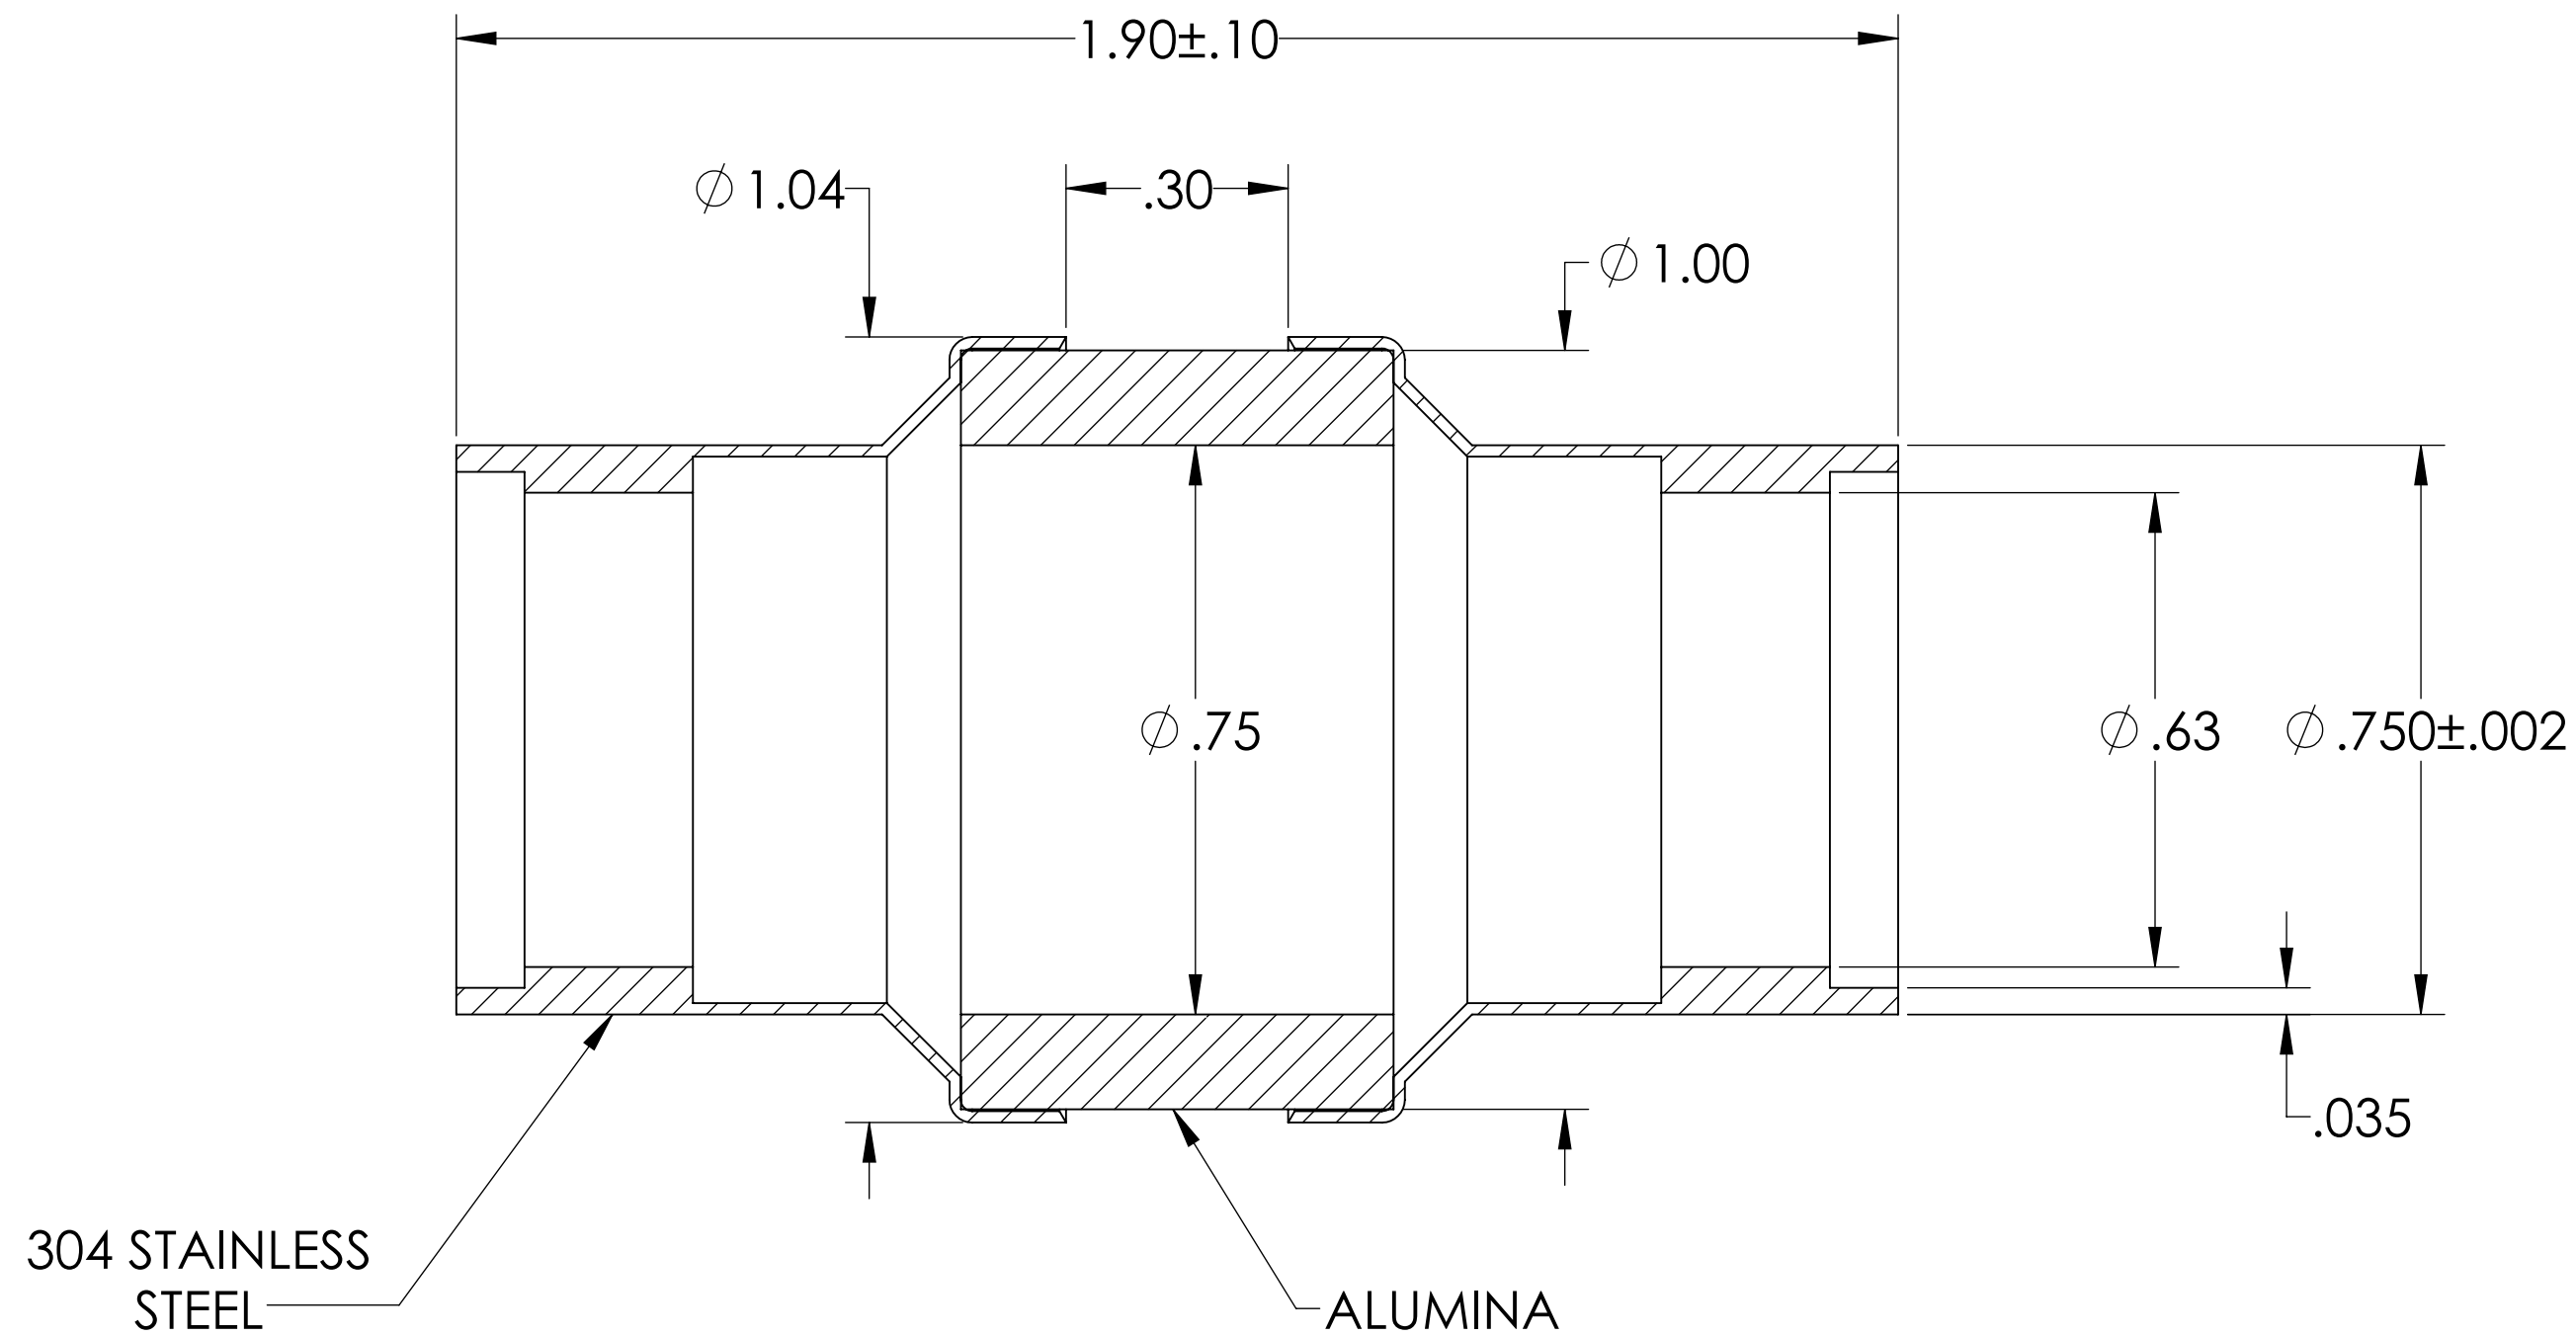


# MPF PRODUCTS INC.

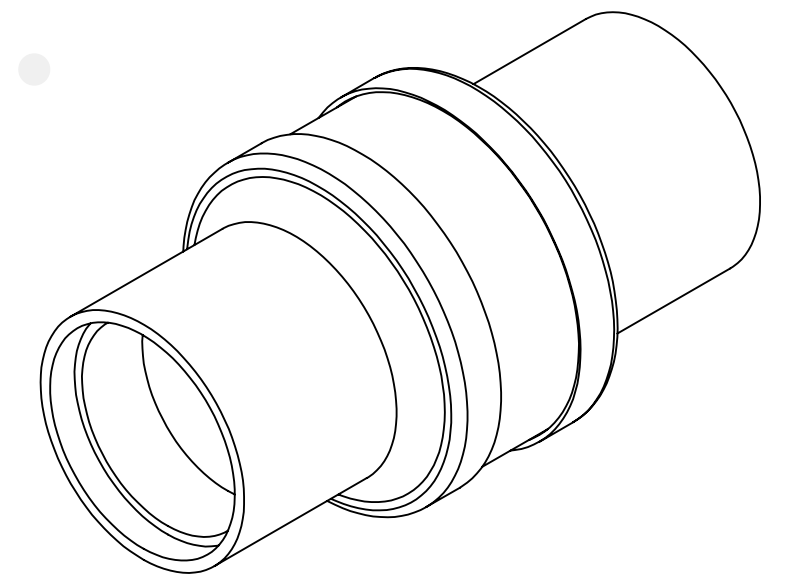

**SPECIFICATIONS:**

1. VOLTAGE: 5KV
2. TEMPERATURE: -200°C TO 450°C
3. LEAK RATE <  $1 \times 10^{-9}$  ATM CC/SEC HE

Break, 5KV Isolation, 0.75" Dia Stainless Steel Tube Adapters, High Voltage Isolation, Thermal Isolation, Weldable Tube Ends, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH $\pm 1/2^\circ$		DRAWN	9/11/2015		
TWO PLACE DECIMAL $\pm .030$		CHECKED	9/11/2015		
THREE PLACE DECIMAL $\pm .015$		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		TITLE: BREAK, 5KV ISOLATION, 0.75" DIA STAINLESS STEEL TUBE ADAPTERS DOWNLOADED FROM MPFPI.COM	
FINISH					
PLATING		APPLICATION NEXT ASSY      USED ON			
SURFACE FINISH:		63/ OR BETTER		DWG. NO.	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A5266-1-W	
		Thursday, January 24, 2019 9:19:02 AM		REV	