



## MPF PRODUCTS INC

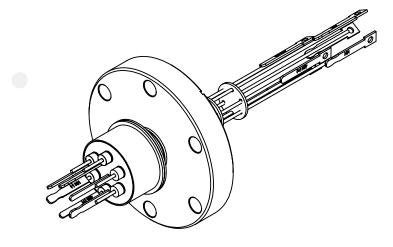


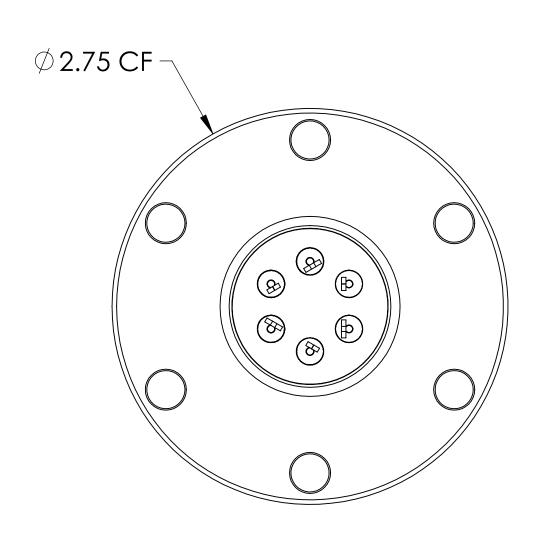

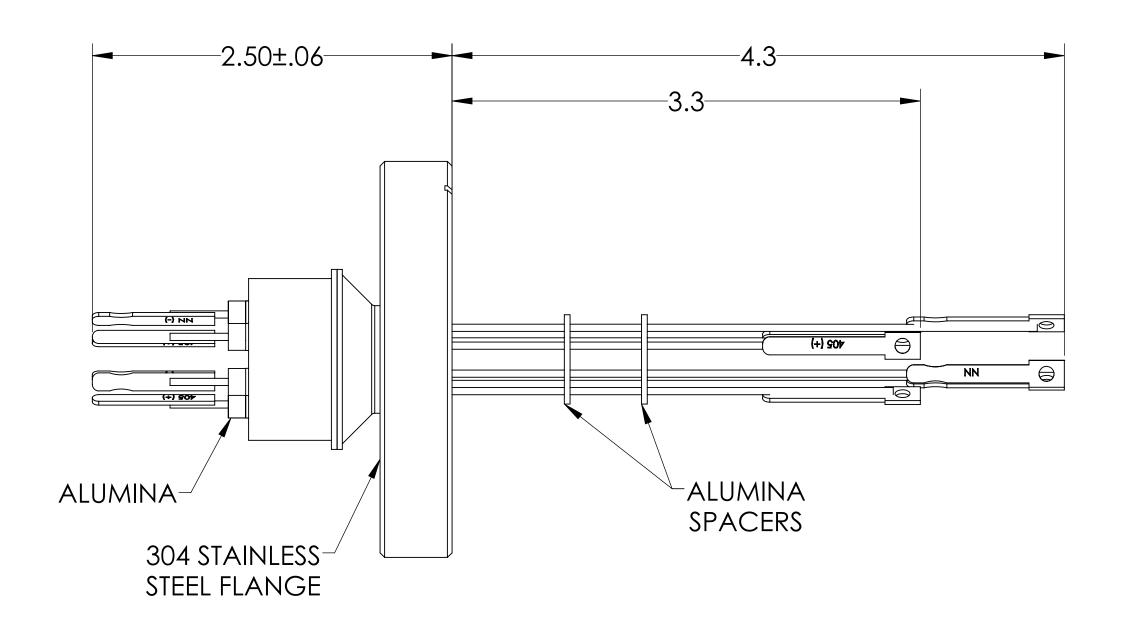

PART #	T/C TYPE
A5775-1-CF	K
A5775-2-CF	J
A5775-3-CF	Е
A5775-4-CF	С





SHEET 1 OF 1

## SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 3 Pairs, Miniature Connector, 2.75"Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #					
	-		١	N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE		ADE DOODLIGTS IN	
TOLERANCES:	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC		NC.
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015	TITL	.E:	
	ENG APPR.	WJ	9/11/2015			
THREE PLACE DECIMAL ± .015	THIRD ANGLE:					
			THERMOCOUPLE, 3 PAIRS, CONNECTOR, 275CF			
MATERIAL						
	APPLICATION					
	NEXT ASSY		USED ON			
				DOV	WNLOADED FROM MPFPI.CO	M
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV
PLATING	UNLESS OTHERWISE SPECIFIED:			A5775		
FLATING	ALL DIAMETERS REMOVE ALL BL		TRIC WITHIN .005. SHARP EDGES	F	Friday, February 8, 2019 1:12:20 PM	