
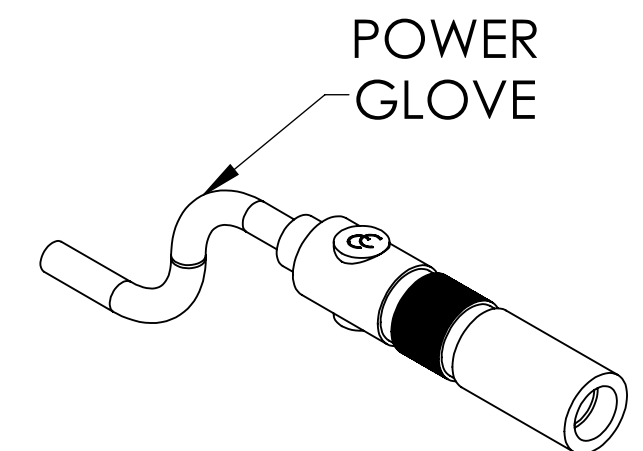
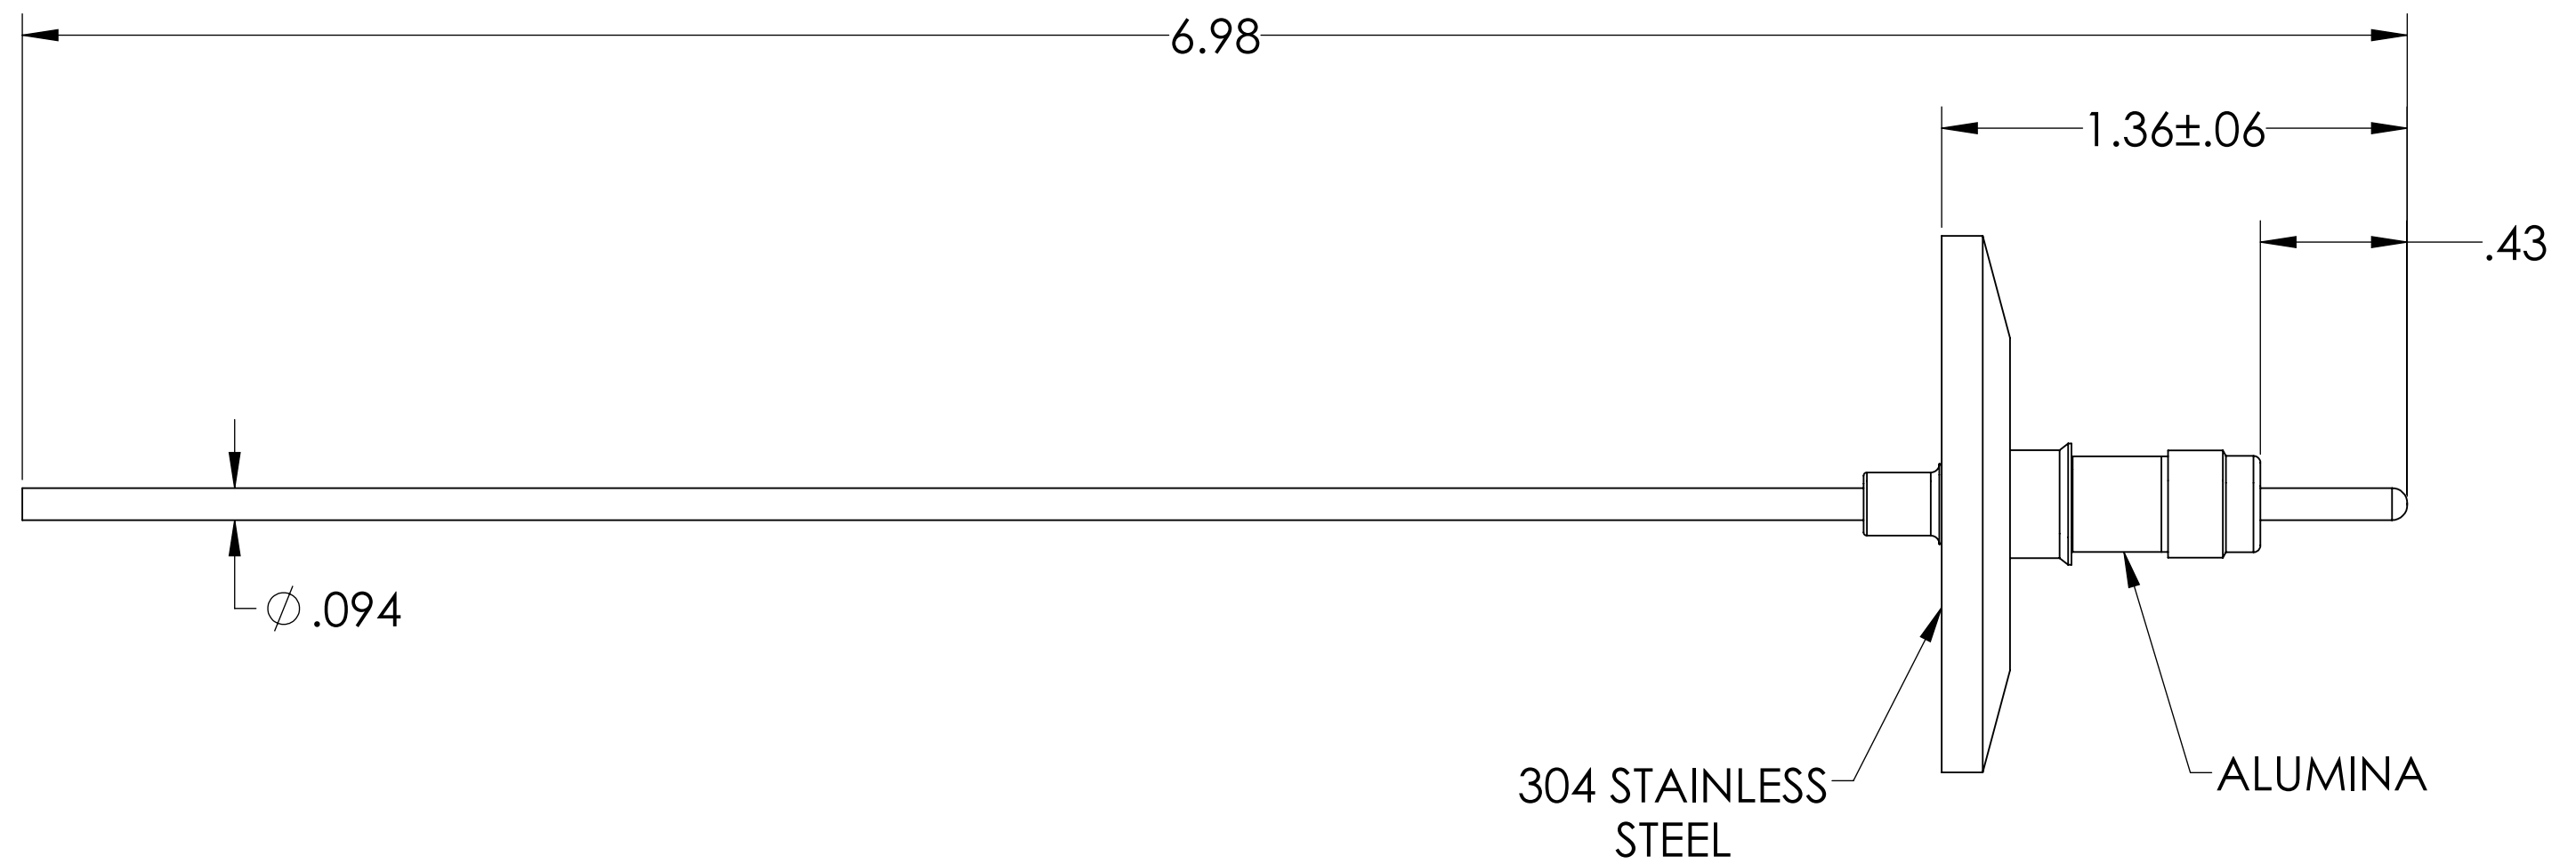
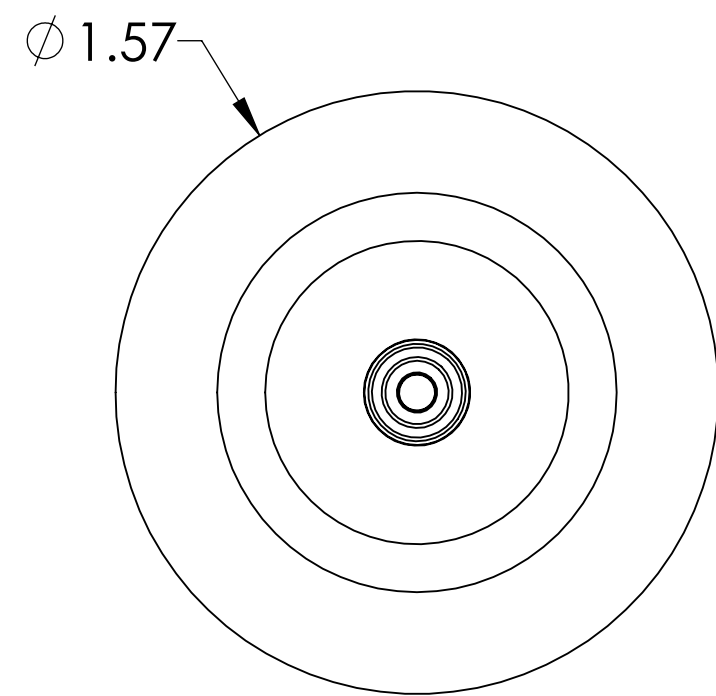


MPF PRODUCTS INC.

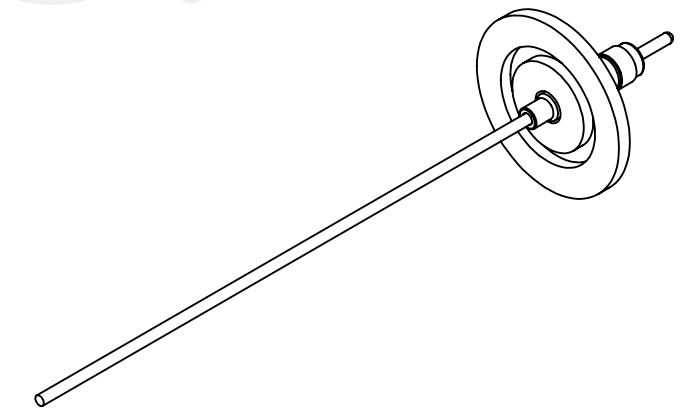

- NOTE:**
1. VOLTAGE: 5,000 VOLTS DC
 2. CURRENT: 30 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Glove, 5000 Volts, 1 Pin, 0.094" Copper Conductors, 1.57" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES	NAME	DATE	MPF PRODUCTS INC.
TOLERANCES:	DRAWN	9/11/2015	
ANGULAR: MACH ± 1/2°	CHECKED	9/11/2015	
TWO PLACE DECIMAL ± .030	ENG APPR.	9/11/2015	
THREE PLACE DECIMAL ± .015	THIRD ANGLE:		TITLE: POWER GLOVE, 5000 VOLTS, 1 PIN, 1.57" QF/KF
MATERIAL			
FINISH	APPLICATION	NEXT ASSY	USED ON
PLATING	SURFACE FINISH:	63 OR BETTER UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
DOWNLOADED FROM MPFPI.COM		DWG. NO.	REV
		A5969-1-QF	
		Tuesday, January 22, 2019 11:54:29 AM	