
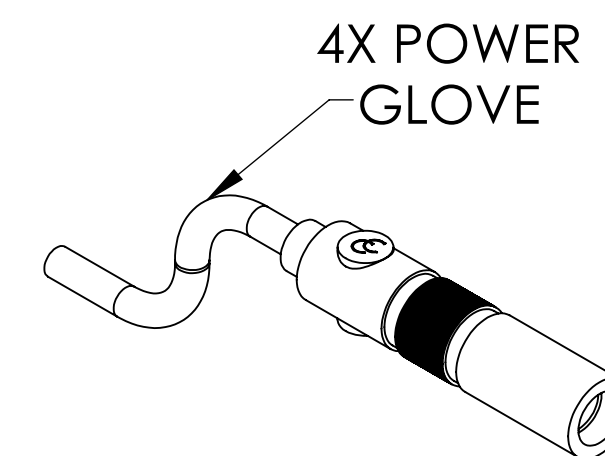
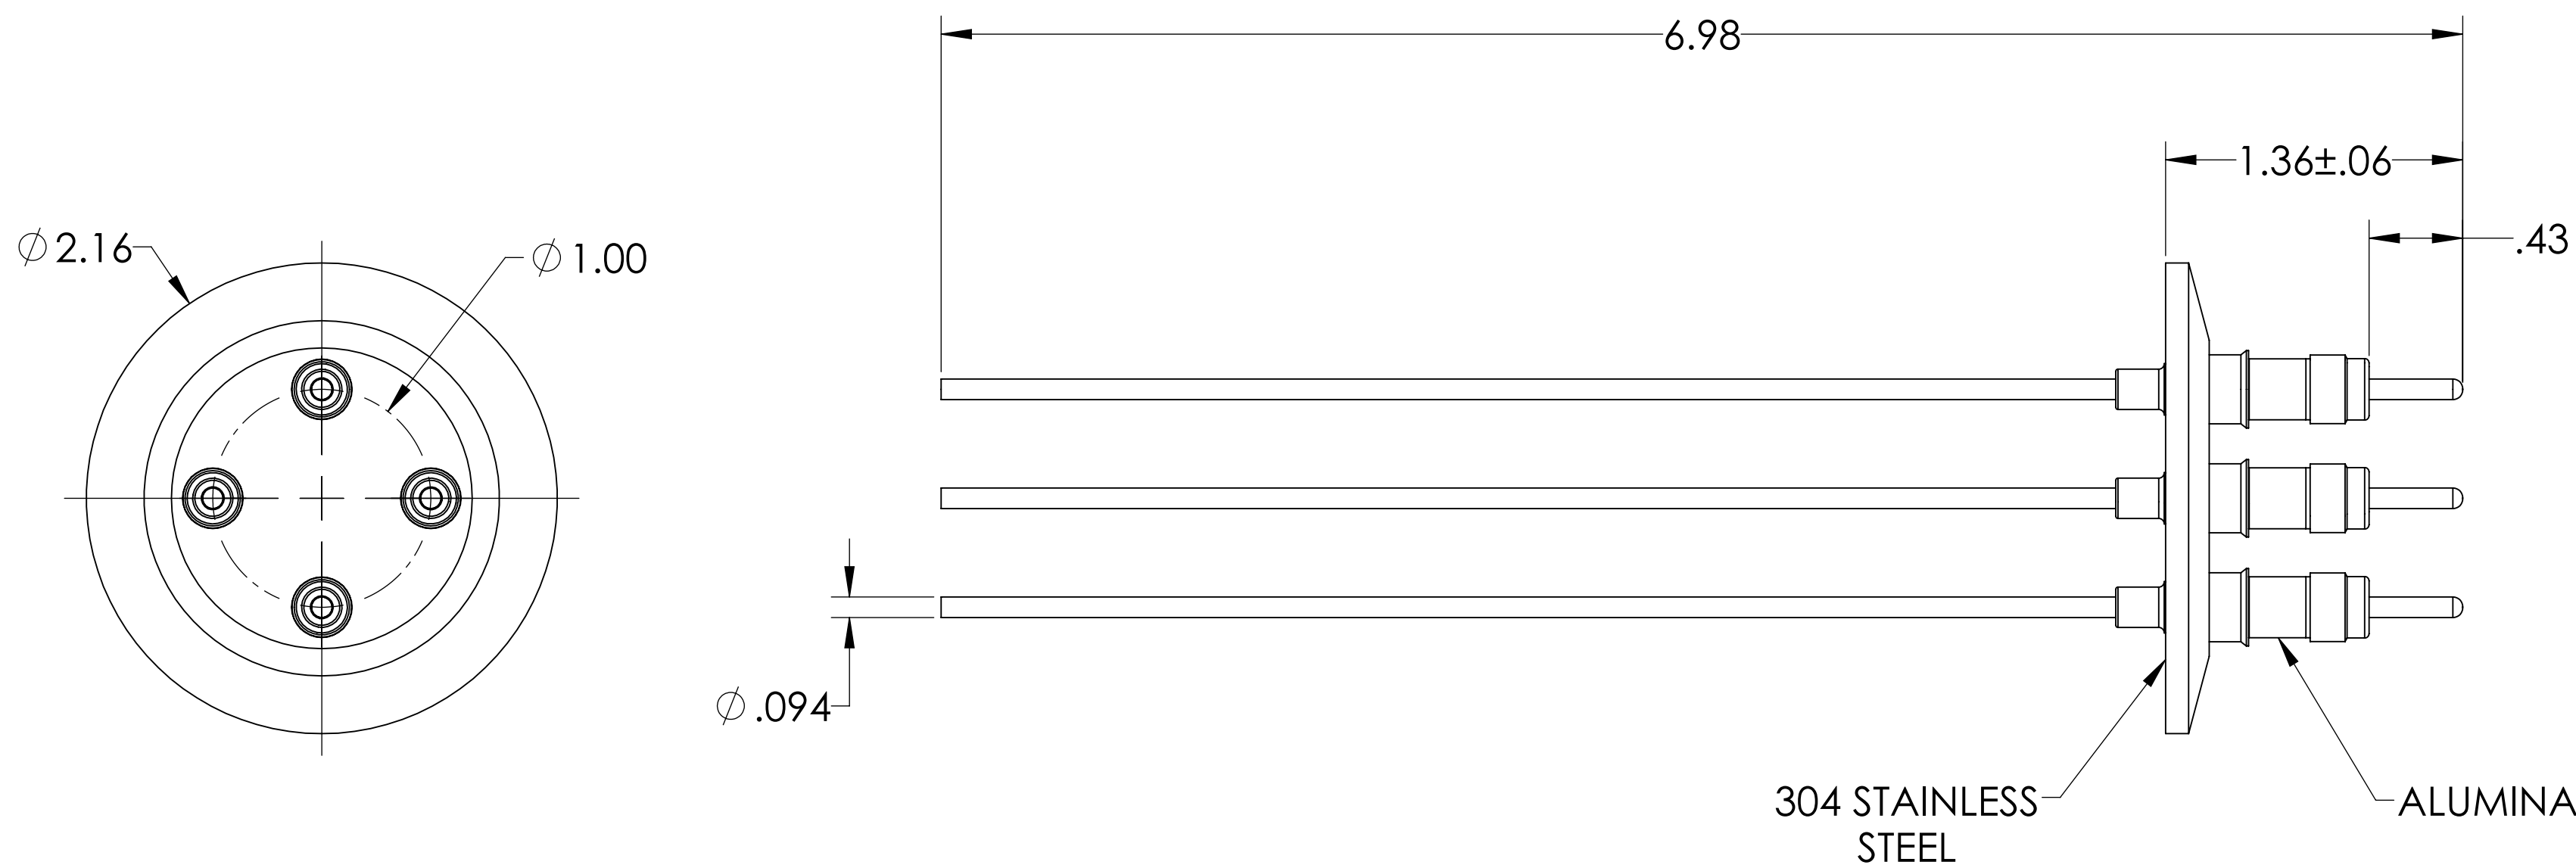


MPF PRODUCTS INC.

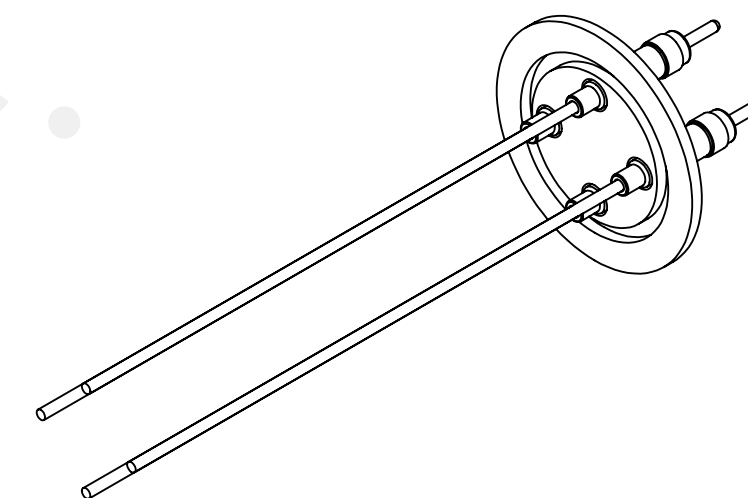

- NOTE:**
1. VOLTAGE: 5,000 VOLTS DC
 2. CURRENT: 30 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Gloves, 5,000 Volts, 4 Pins, 0.094" Copper Conductors, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED				9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		POWER GLOVES, 5000 VOLTS, 4 PINS, 2.16" QF/KF		
MATERIAL		APPLICATION				
		NEXT ASSY	USED ON			
FINISH		SURFACE FINISH:		DOWNLOADED FROM MPFPI.COM		
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO.		
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A5972-1-QF		
		TUESDAY, JANUARY 22, 2019 11:56:04 AM		REV		