
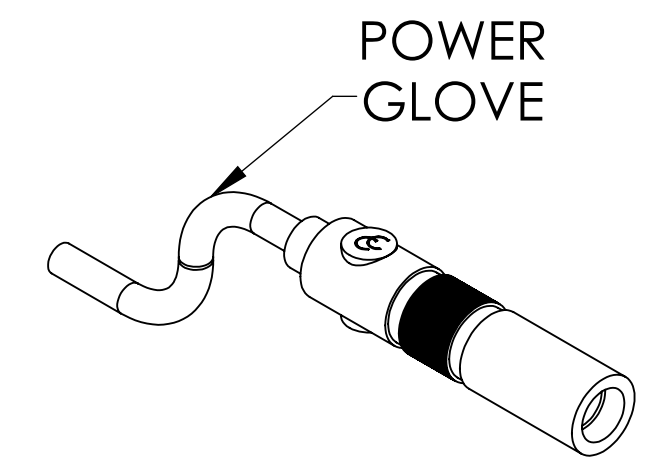
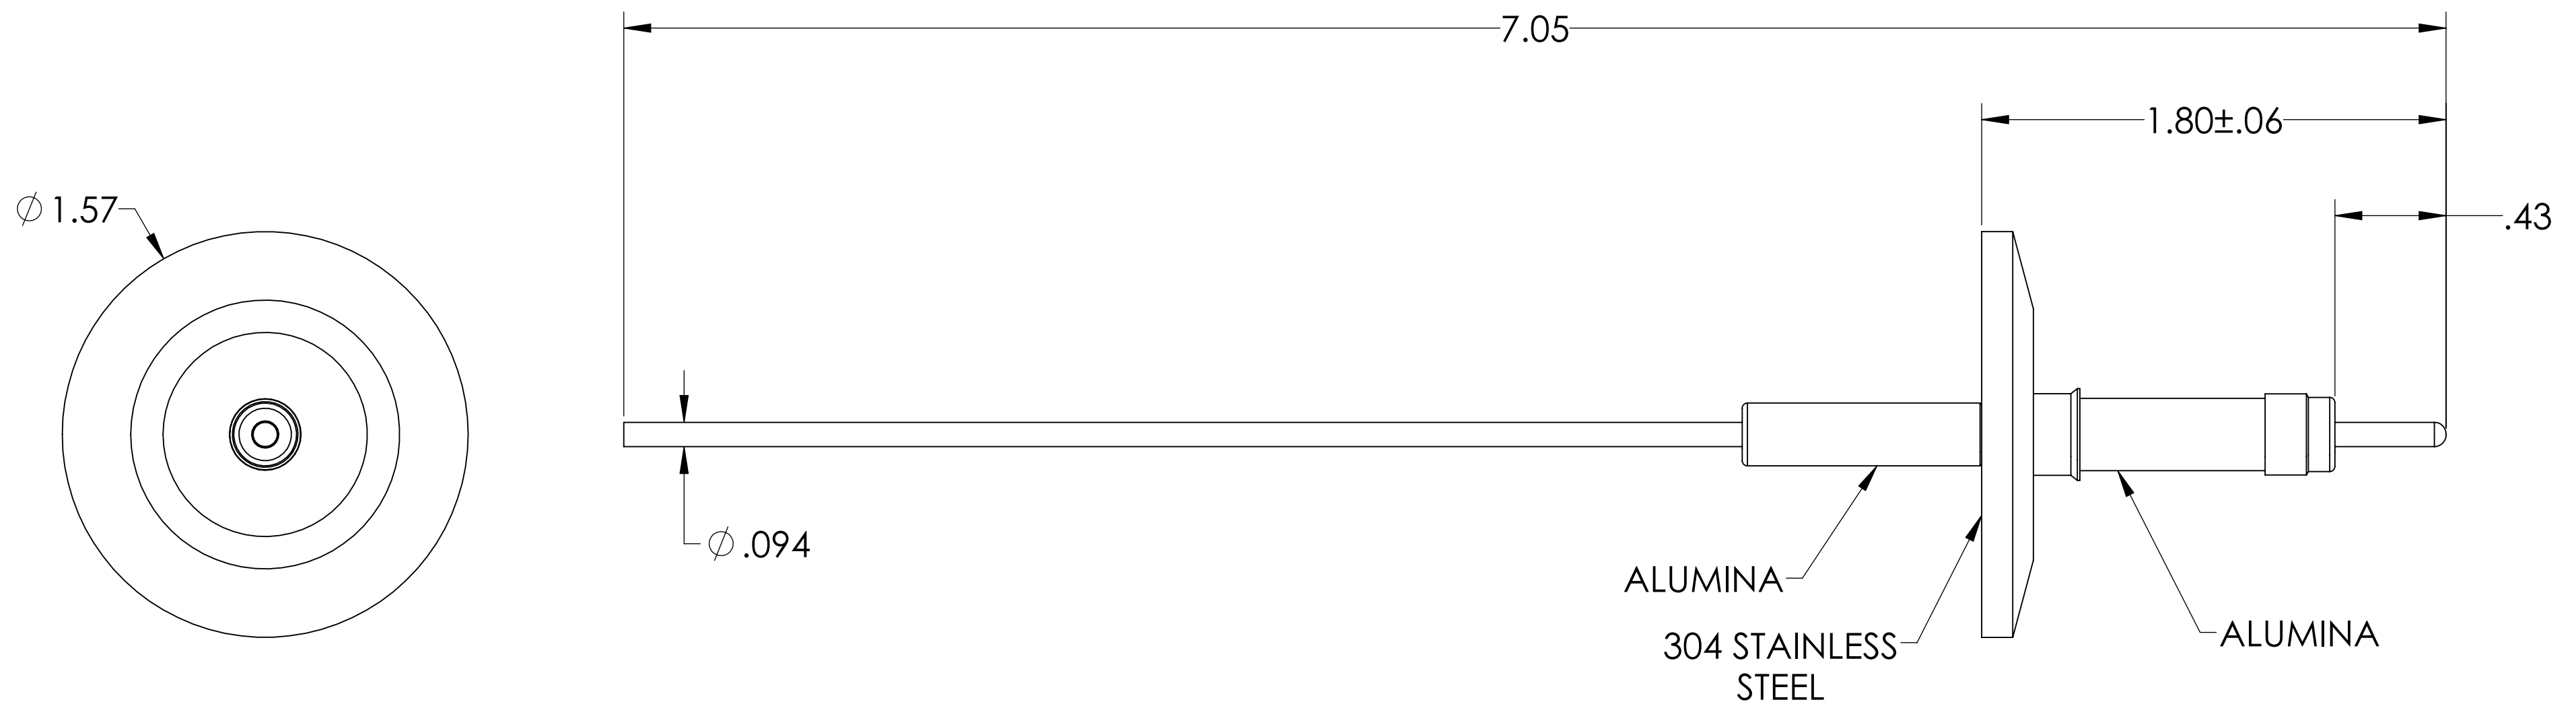


MPF PRODUCTS INC.

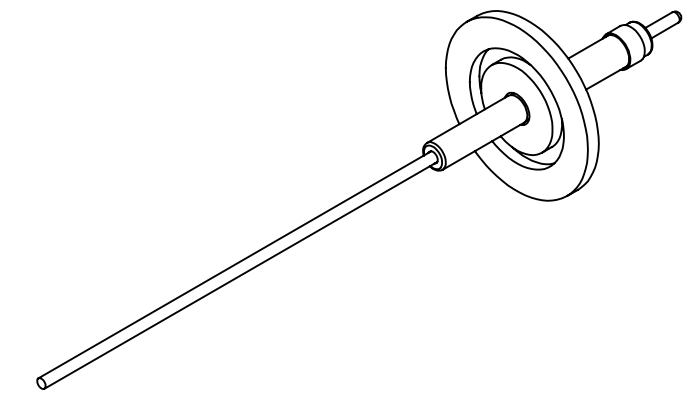

- NOTE:
1. VOLTAGE: 10,000 VOLTS DC
 2. CURRENT: 30 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Glove, 10 KV, 1 Pin, 0.094" Copper Conductors, 1.57" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.	
TOLERANCES:		DRAWN	9/11/2015		
ANGULAR: MACH ± 1/2°		CHECKED	9/11/2015		
TWO PLACE DECIMAL ± .030		ENG APPR.	9/11/2015		
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		POWER GLOVE, 10 KV, 1 PIN, 1.57" QF/KF	
MATERIAL		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH: 63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A5975-1-QF	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV.	
		Tuesday, January 22, 2019 11:56:42 AM			