
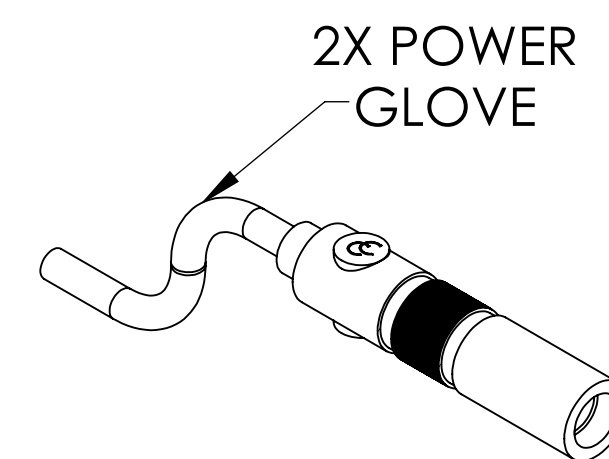
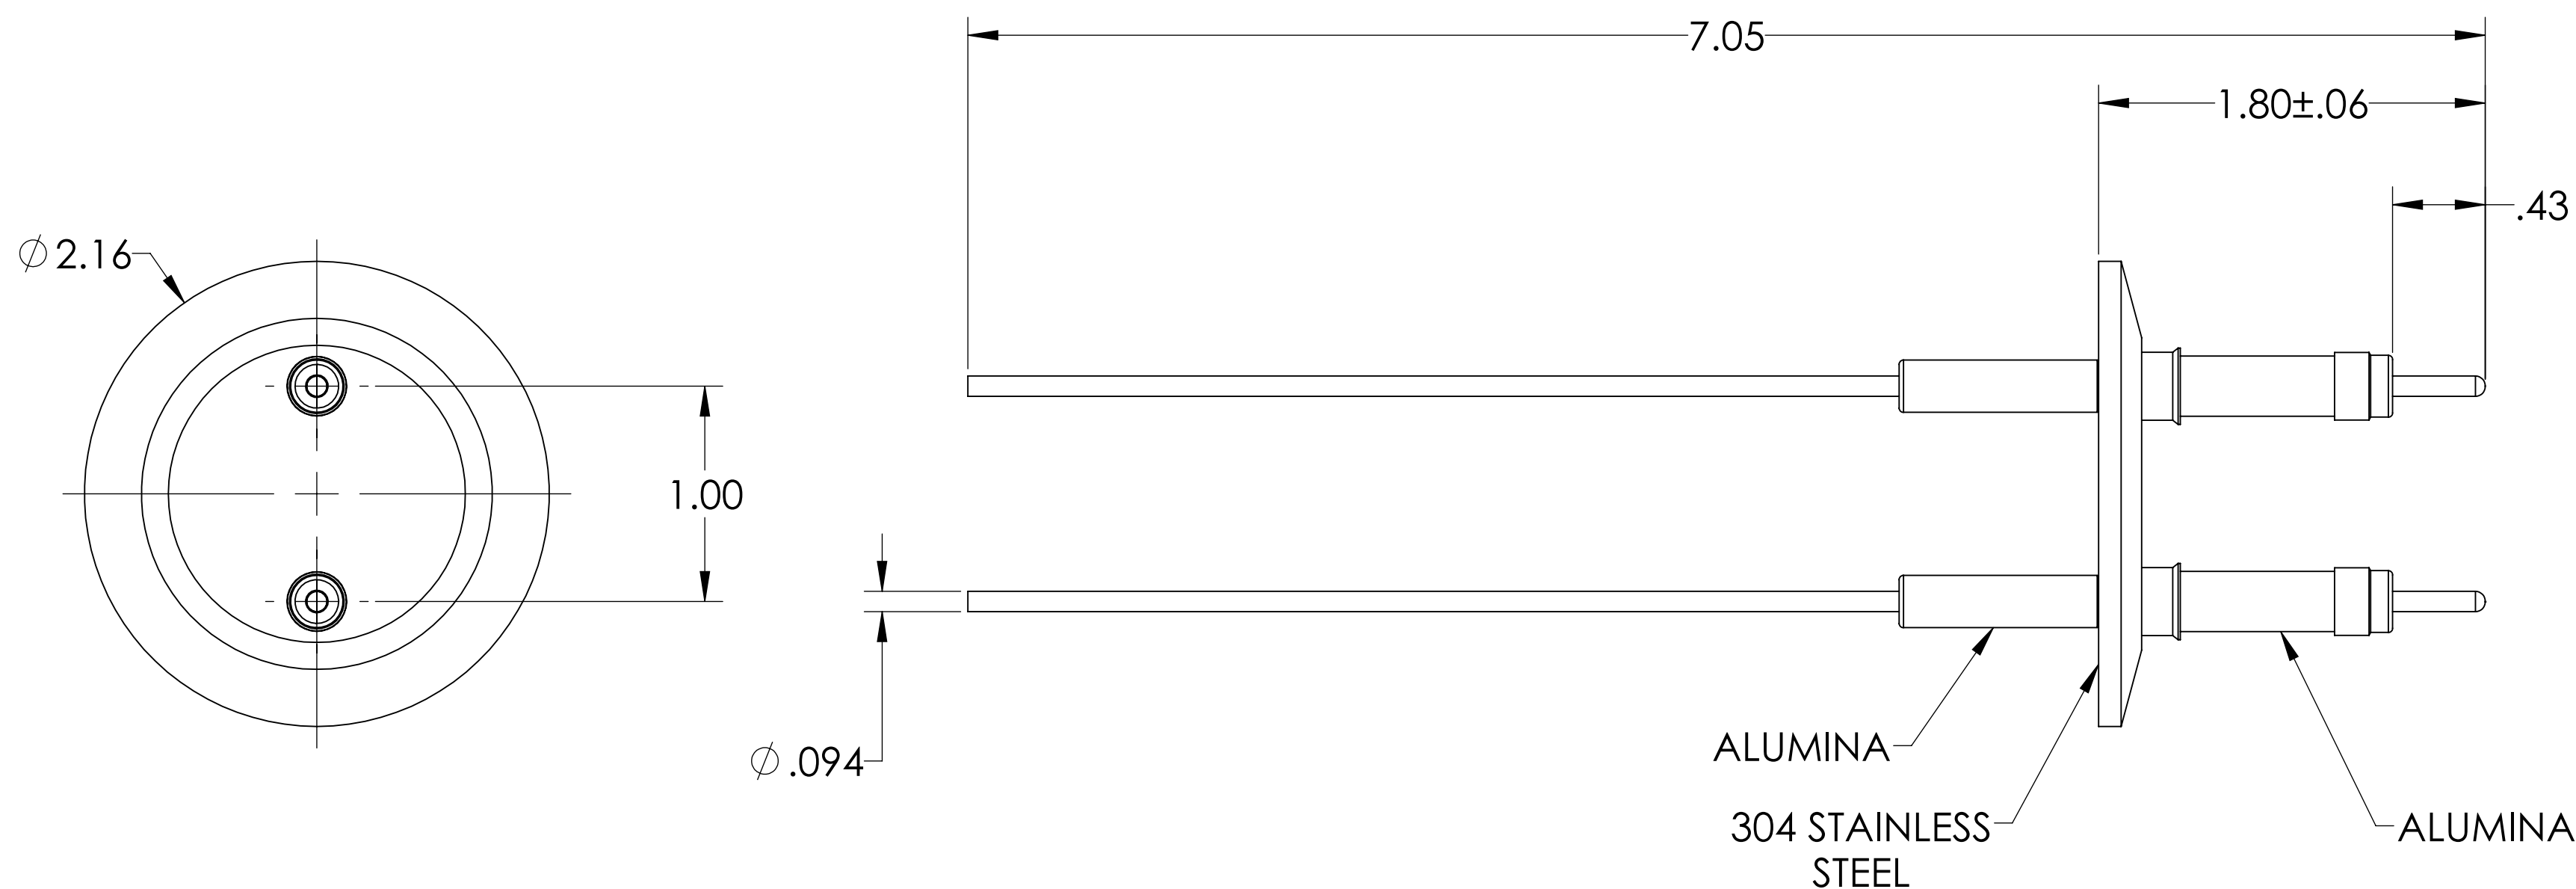


MPF PRODUCTS INC.

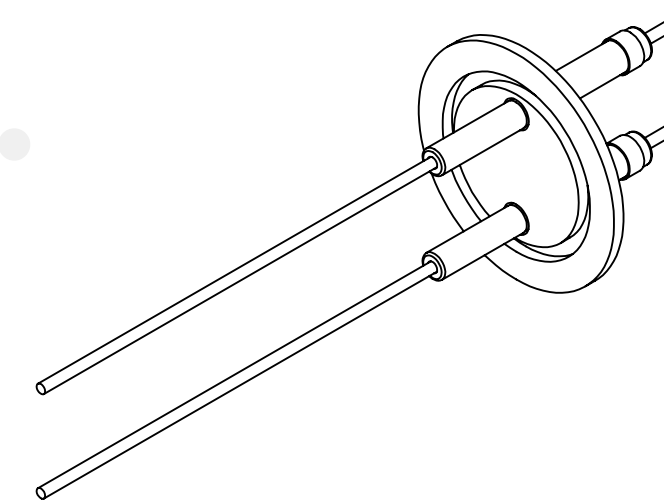

- NOTE:**
1. VOLTAGE: 10,000 VOLTS DC
 2. CURRENT: 30 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Gloves, 10 KV, 2 Pins, 0.094" Copper Conductors, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED				9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		POWER GLOVES, 10 KV, 2 PINS, 2.16" QF/KF		
MATERIAL		APPLICATION				
		NEXT ASSY	USED ON			
		SURFACE FINISH: 63/ OR BETTER				
FINISH		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A5977-1-QF		
PLATING		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV		
		Tuesday, January 22, 2019 11:58:15 AM		DOWNLOADED FROM MPFPI.COM		