
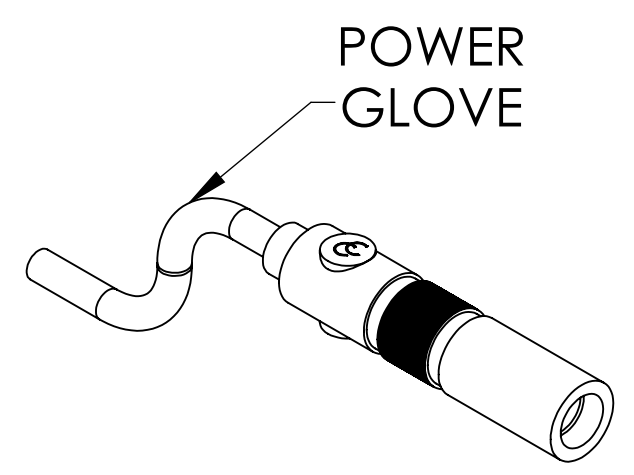
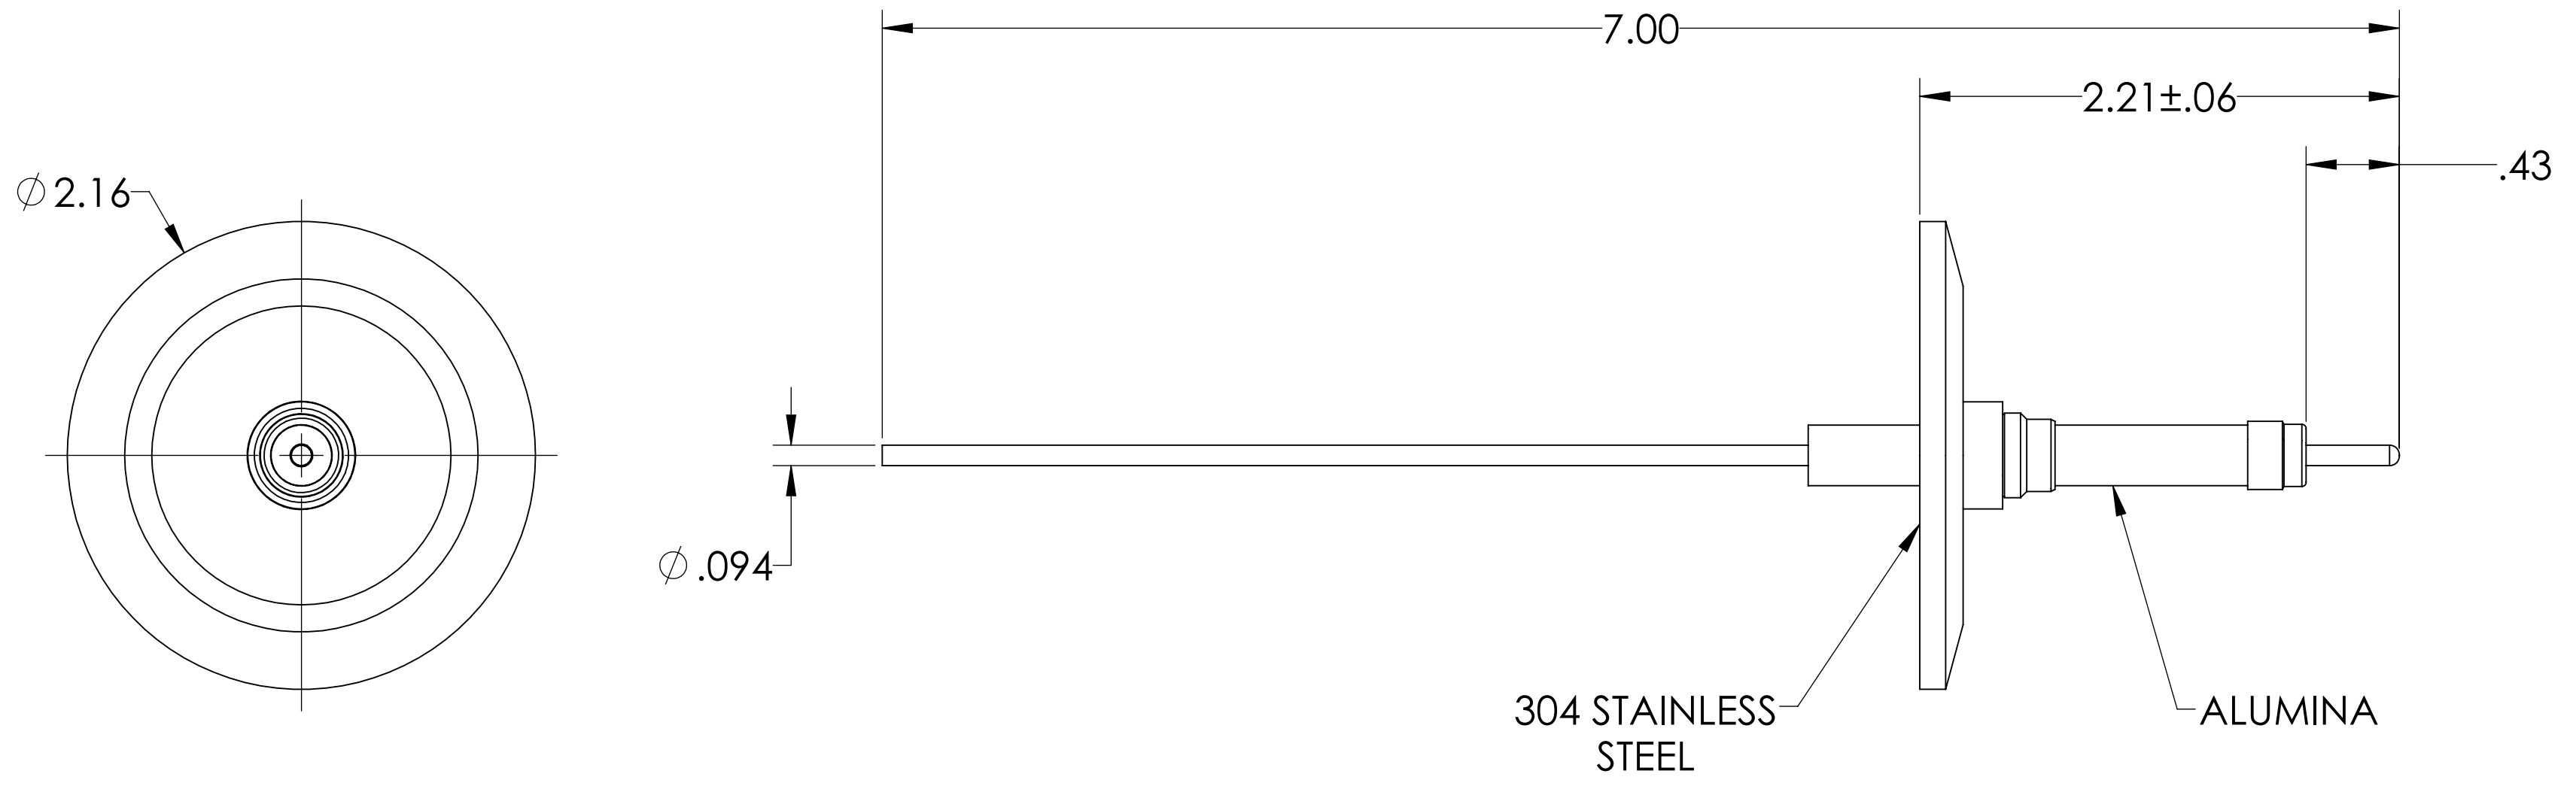


# MPF PRODUCTS INC.

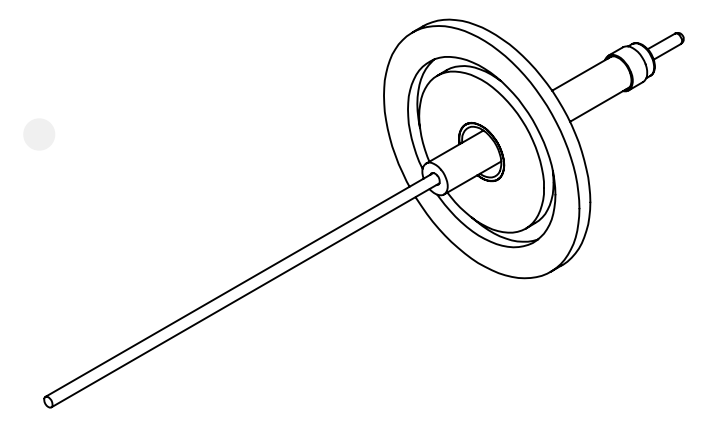

- NOTE:**
1. VOLTAGE: 20,000 VOLTS DC
  2. CURRENT: 30 AMPS
  3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Glove, 20 KV, 1 Pin, 0.094" Copper Conductor, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.	
TOLERANCES:		DRAWN	9/11/2015		
ANGULAR: MACH ± 1/2°		CHECKED	9/11/2015		
TWO PLACE DECIMAL ± .030		ENG APPR.	9/11/2015		
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		POWER GLOVE, 20 KV, 1 PIN, 2.16" QF/KF	
MATERIAL		APPLICATION			
		NEXT ASSY	USED ON		
FINISH	SURFACE FINISH:	63/ OR BETTER		DOWNLOADED FROM MPFPI.COM	
PLATING	UNLESS OTHERWISE SPECIFIED:		DWG. NO.		REV
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A5984-1-QF		Tuesday, January 22, 2019 12:48:00 PM	