
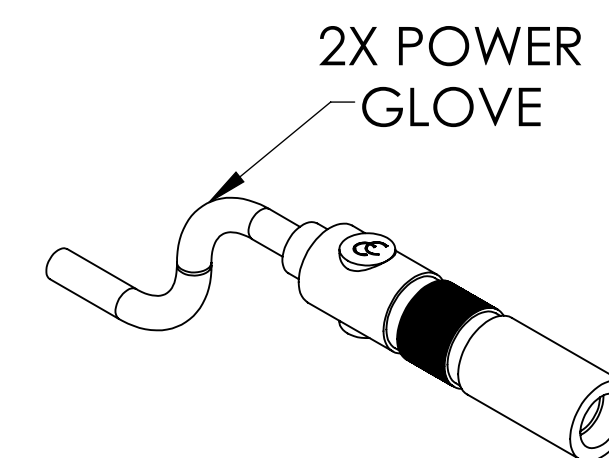
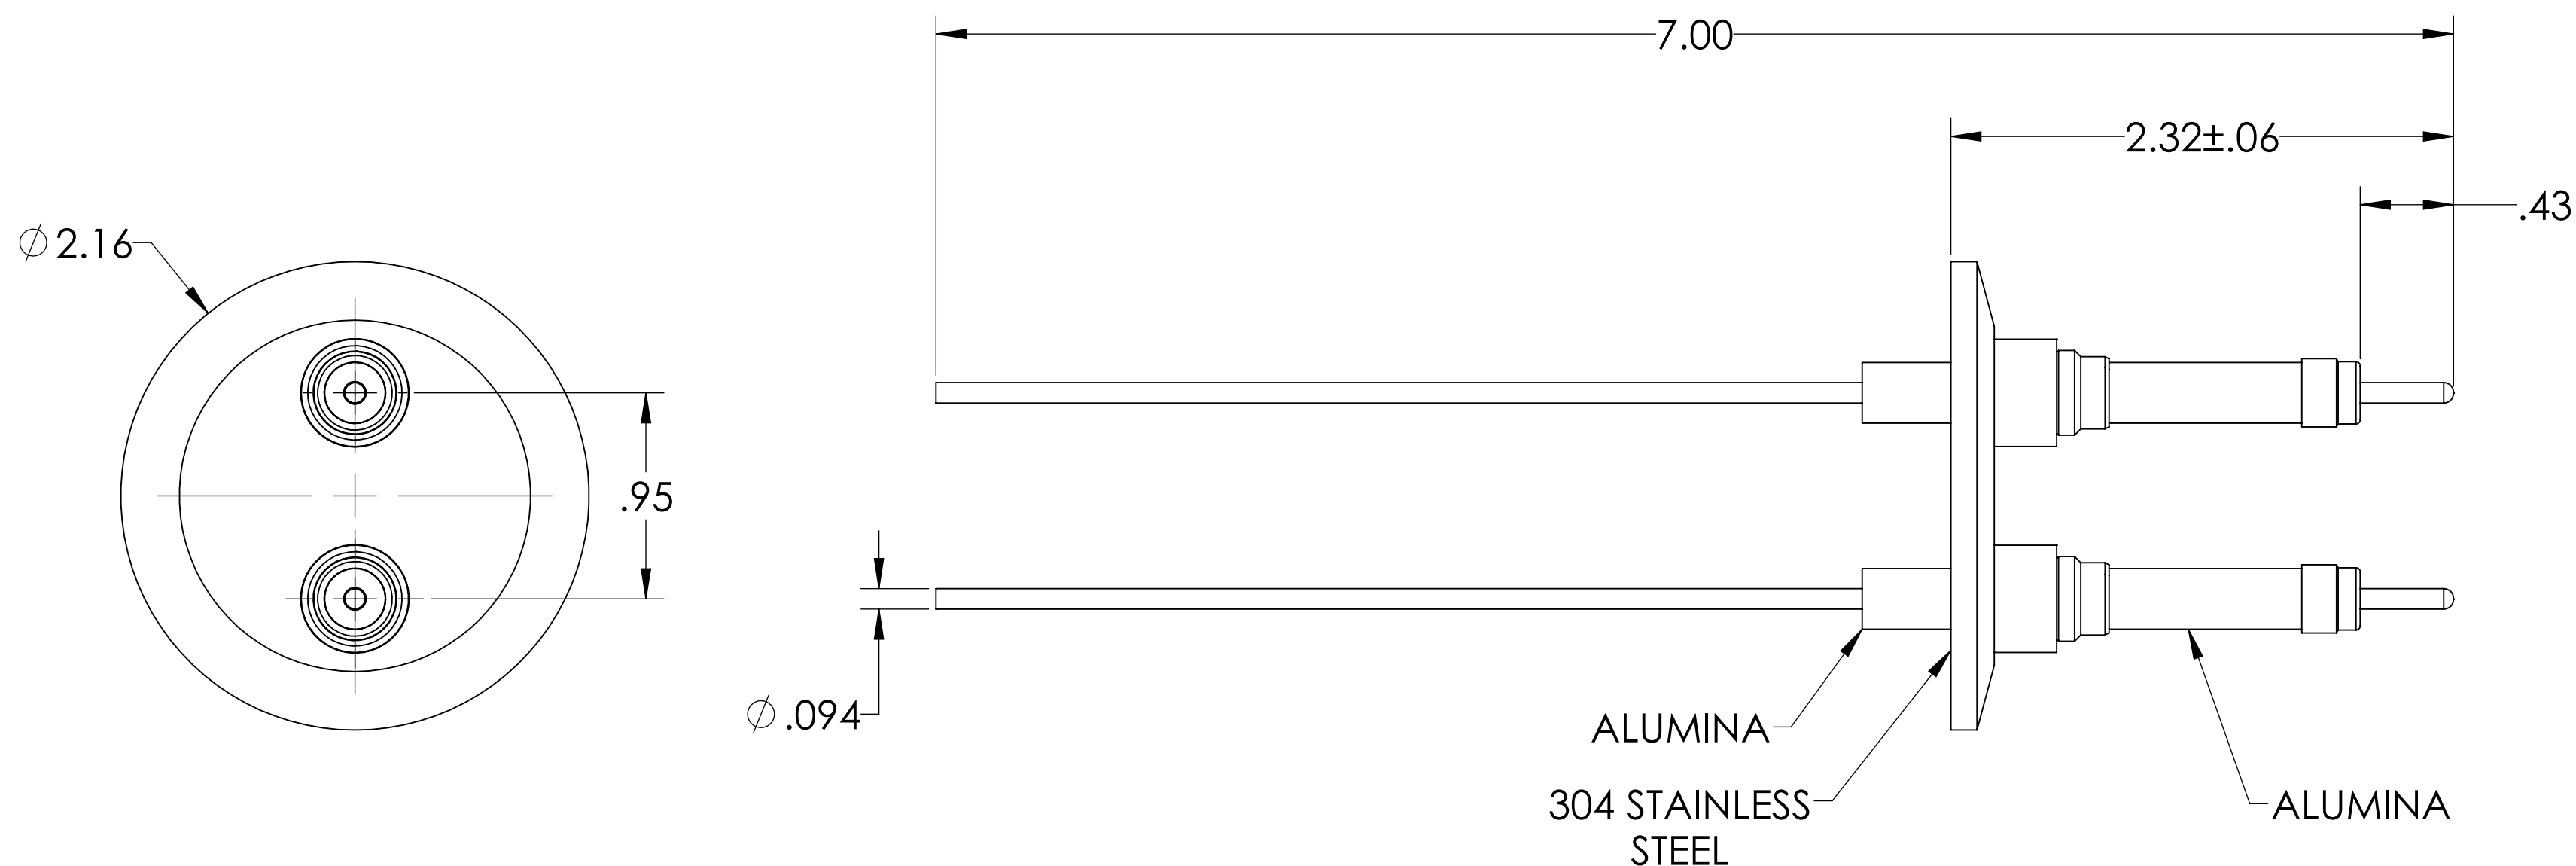


MPF PRODUCTS INC.

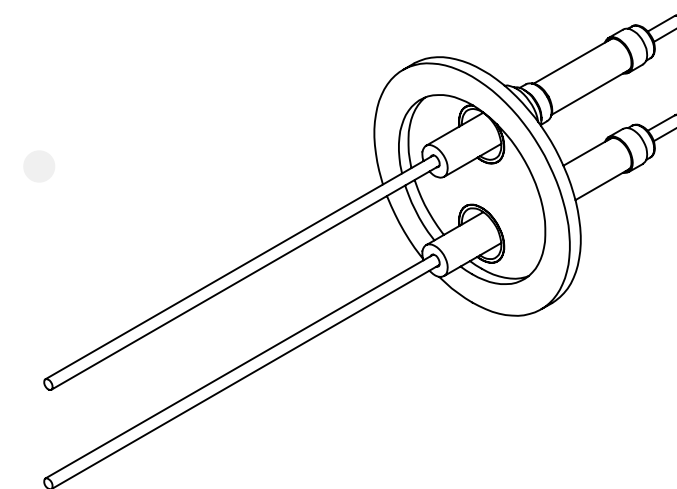

- NOTE:**
1. VOLTAGE: 20,000 VOLTS DC
 2. CURRENT: 30 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Gloves, 20 KV, 2 Pins, 0.094" Copper Conductors, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:		TITLE: POWER GLOVES, 20 KV, 2 PINS, 2.16" QF/KF
	APPLICATION		DOWNLOADED FROM MPFPI.COM
	NEXT ASSY	USED ON	DWG. NO.
FINISH	SURFACE FINISH: 63/ OR BETTER		REV
PLATING	UNLESS OTHERWISE SPECIFIED:		A5985-1-QF
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Tuesday, January 22, 2019 12:49:07 PM