

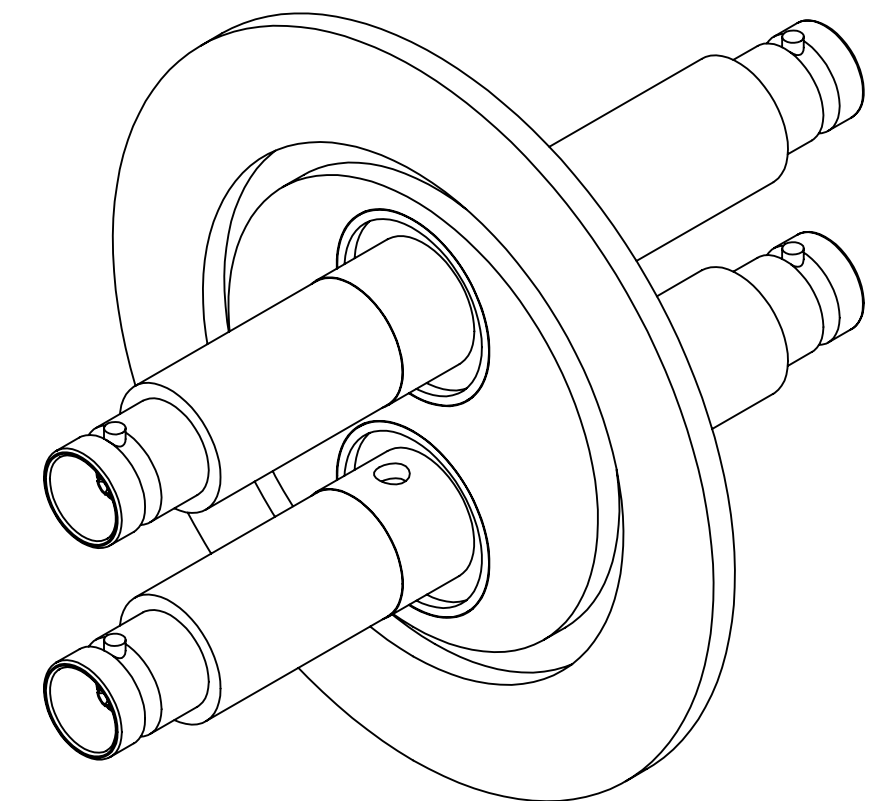
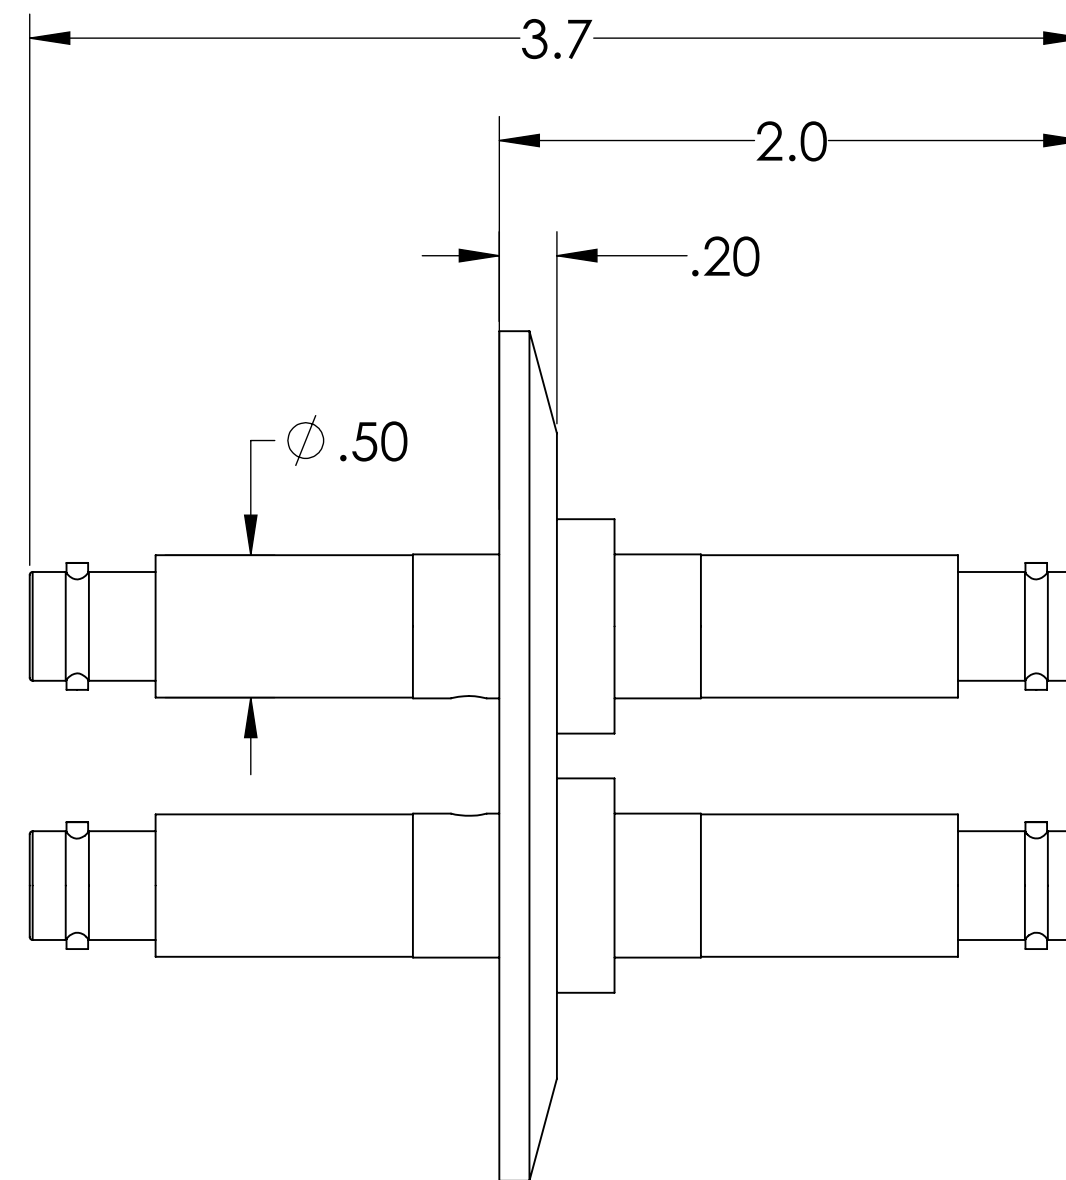


MPF PRODUCTS INC.

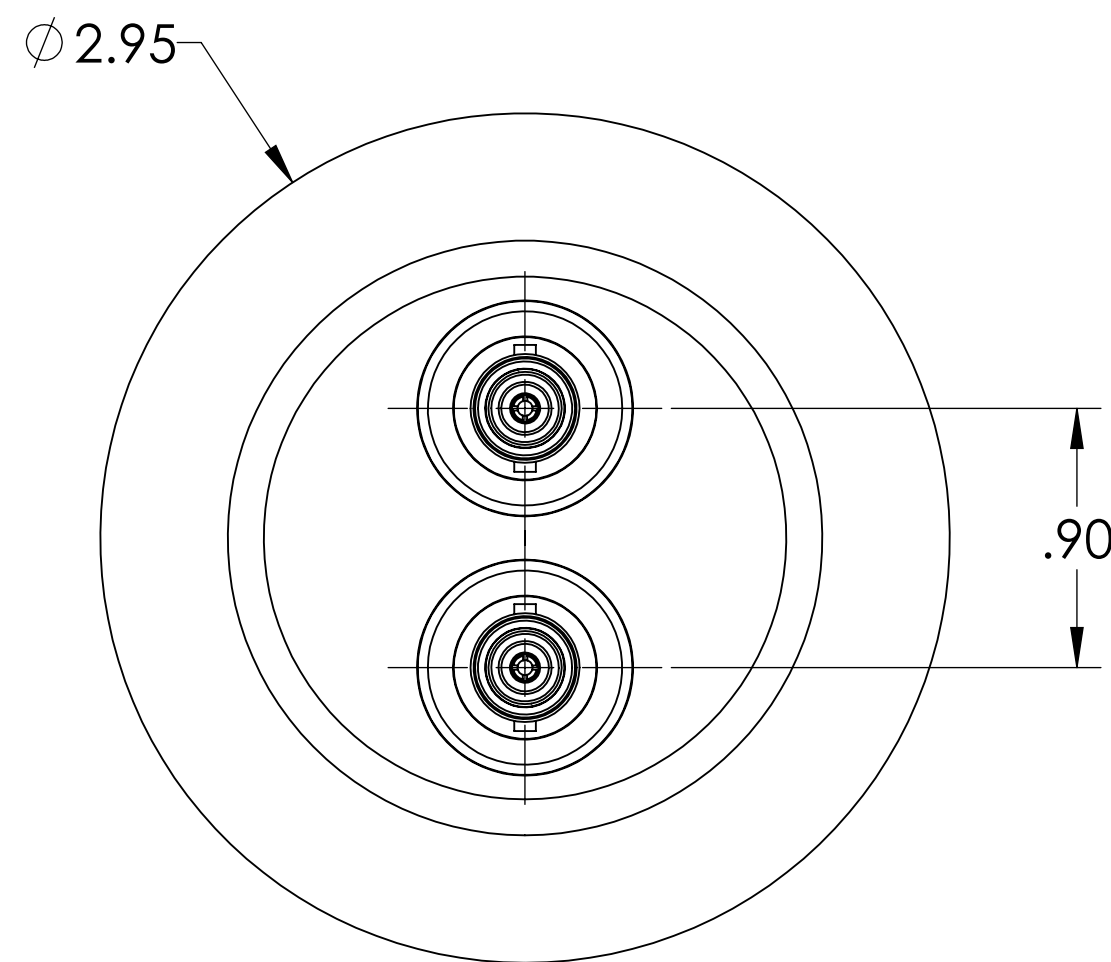

PART #	AIRSIDE CONNECTOR INCLUDED
A6974-1-QF	YES
A6974-2-QF	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 5000 VOLTS DC
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 2 Pins, Grounded Shield, Double Ended, 2.95" QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		TITLE: SHV-5 COAXIAL FEEDTHROUGH, 2 PINS, GROUNDED SHIELD, DOUBLE ENDED, 2.95" QF/KF	
FINISH					
PLATING		APPLICATION NEXT ASSY USED ON			
		SURFACE FINISH: 63 OR BETTER			
		UNLESS OTHERWISE SPECIFIED:		DOWNLOADED FROM MPFPI.COM DWG. NO. REV	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A6974 Thursday, January 17, 2019 3:49:42 PM	