


PART #	AIRSIDE CONNECTOR INCLUDED
A6984-2-QF	YES
A6984-5-QF	NO



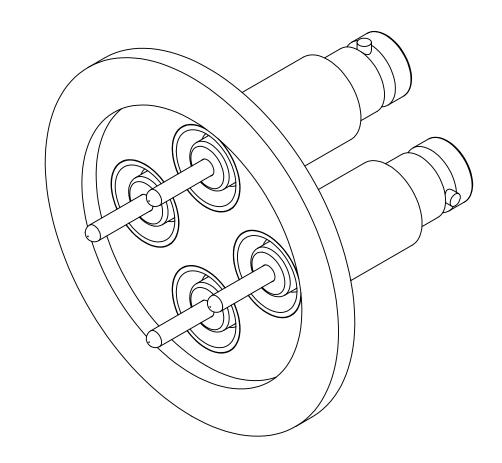

## NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 5000 VOLTS DC

3. CURRENT: 3 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), -65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 4 Pins, Grounded Shield, 2.16" QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #							
DIMENSIONS ARE IN INCHES TOLERANCES:	N.							
		NAME	ME DATE		MADE DECENIO			
	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC.			<u>чС.</u>	
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015	TITLE:				
	ENG APPR.	WJ	9/11/2015		MHV COAXIAL			
THREE PLACE DECIMAL ± .015	THIRD ANGLE:							
MATERIAL	APPLICATION NEXT ASSY USED ON			FEEDTHROUGH, 4 PINS, GROUNDED SHIELD, 2.16" QF/KF				
	NEXT ASST		USED ON	DOV	wnloaded from	MPFPI.CO	М	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.		REV	
PLATING	UNLESS OTHERWISE SPECIFIED:			A6984	MHV			
. 2	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			F	Friday, January 24, 2020 2:33:37 PM			
E WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 O							OF 1	