
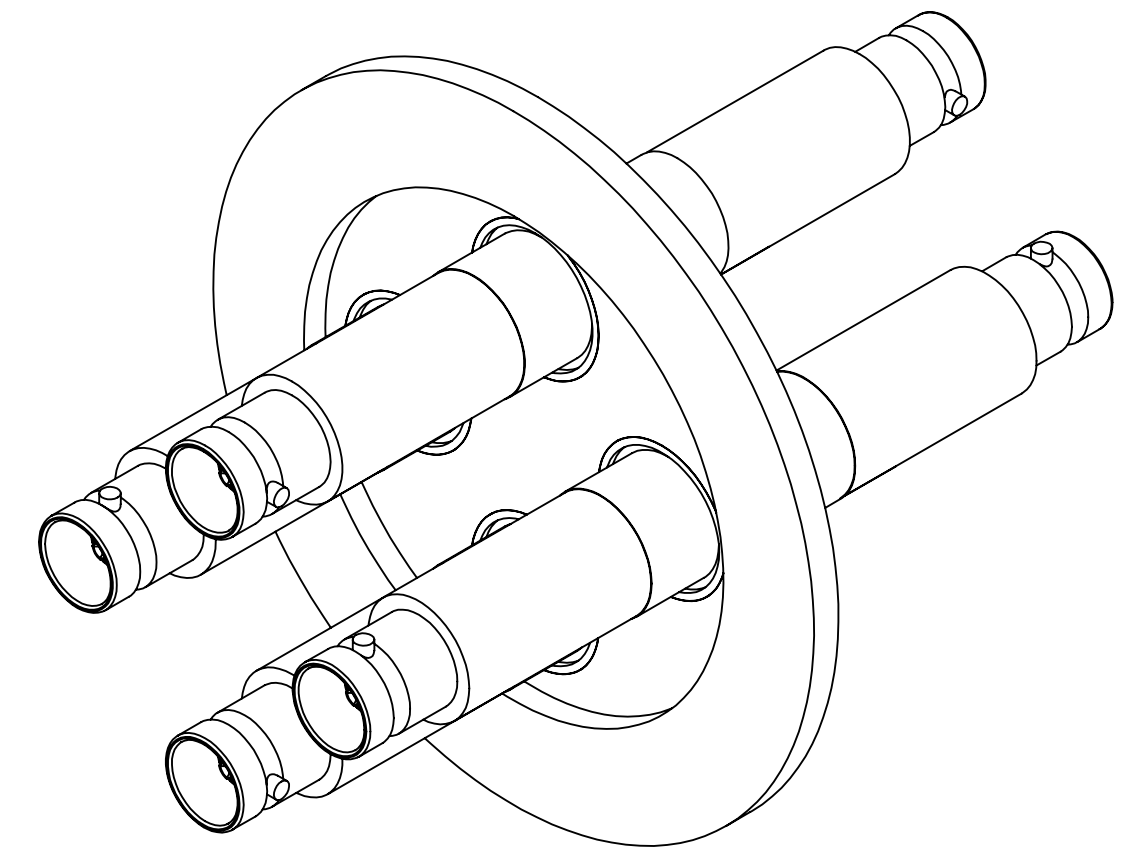
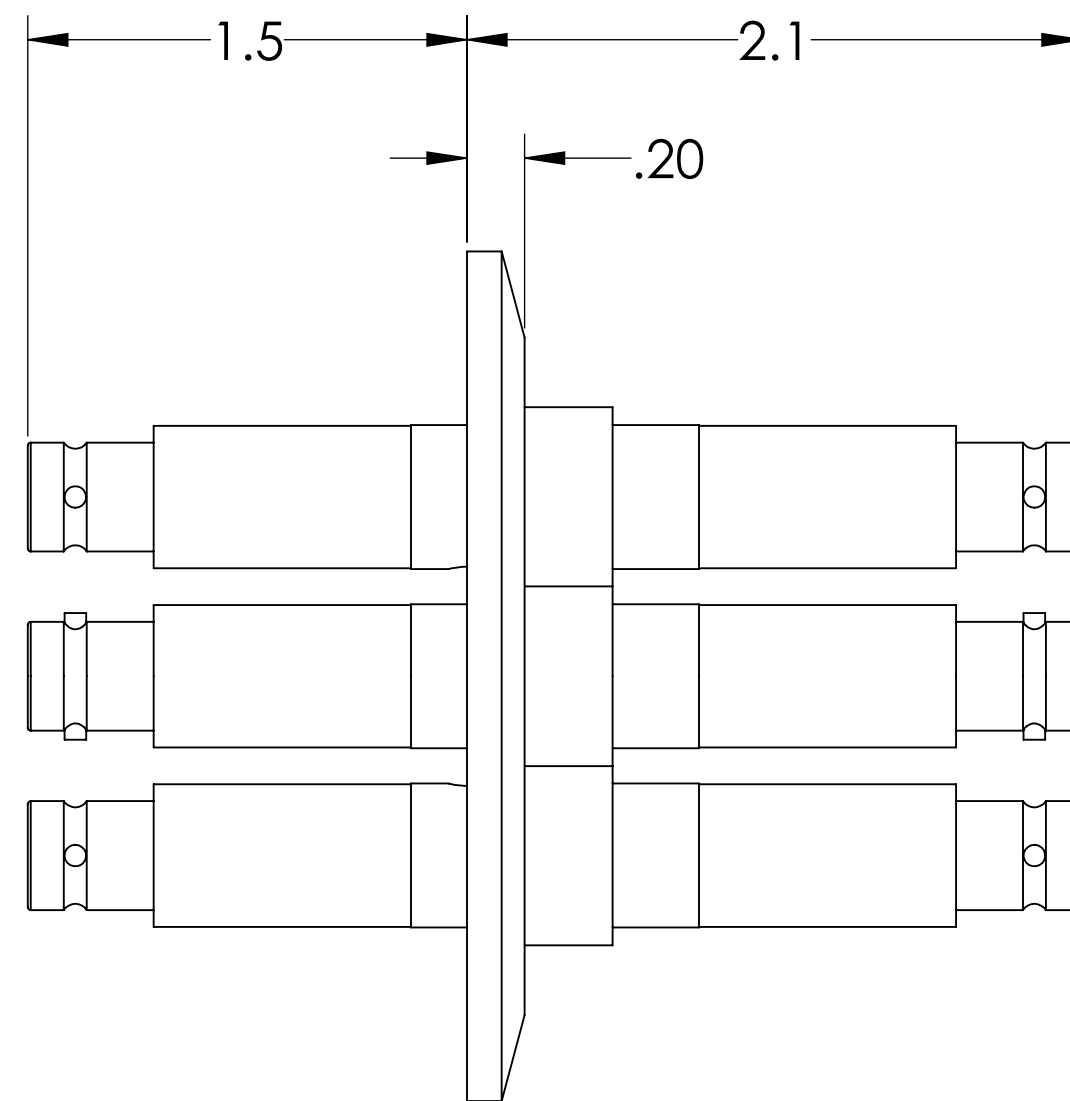


MPF PRODUCTS INC.

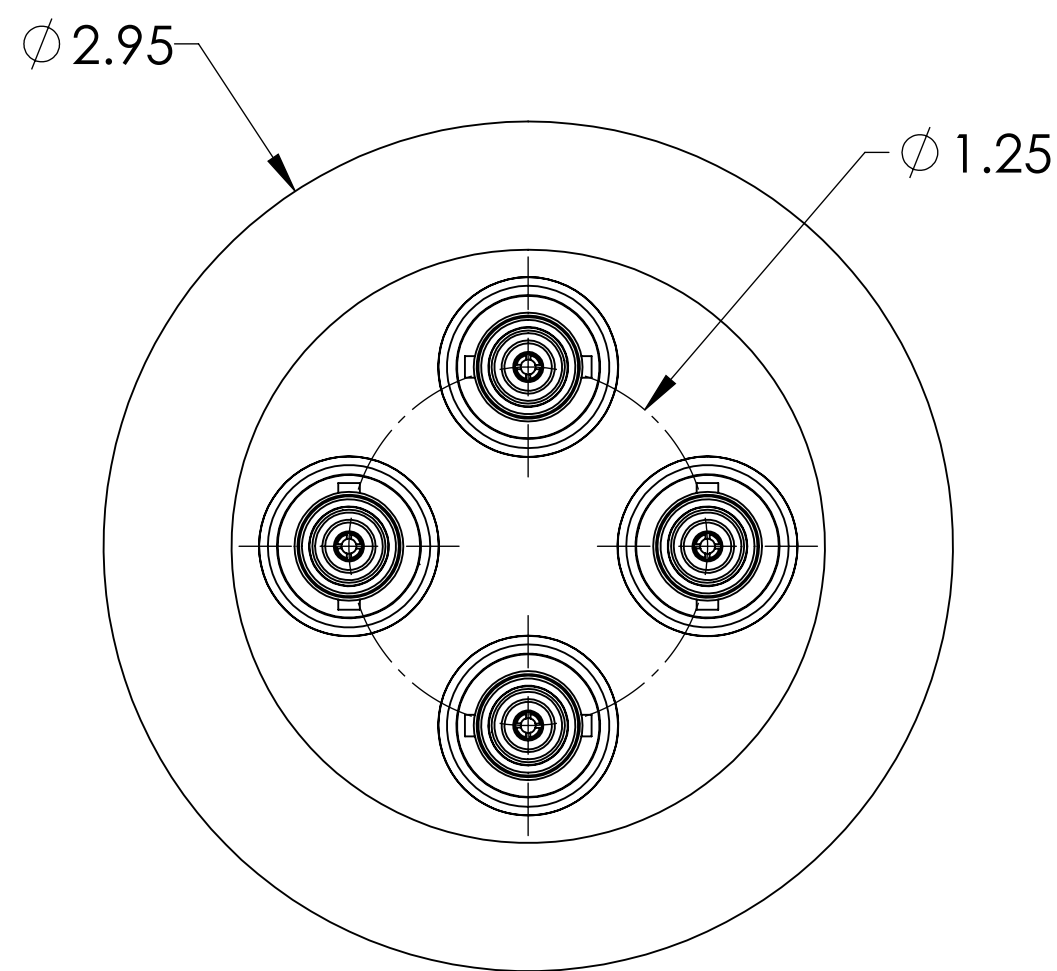


PART #	AIRSIDE CONNECTOR INCLUDED
A7111-3-QF	YES
A7111-4-QF	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 5000 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 4 Pins, Grounded Shield, Double Ended, 2.95" QF/KF, UHV Compatible



UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	REMOVE ALL BURRS AND SHARP EDGES
	MPF PRODUCTS INC. TITLE: MHV COAXIAL FEEDTHROUGH, 4 PINS, GROUNDED SHIELD, DOUBLE ENDED, 2.95" QF/KF DWG. NO. A7111 MHV Thursday, January 17, 2019 3:42:36 PM	