

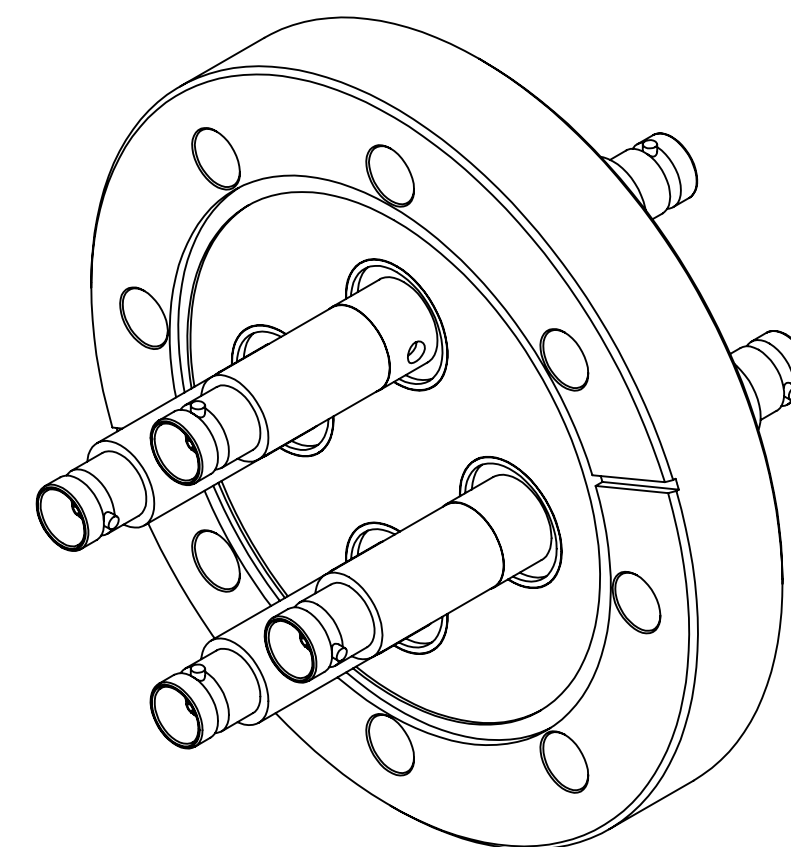
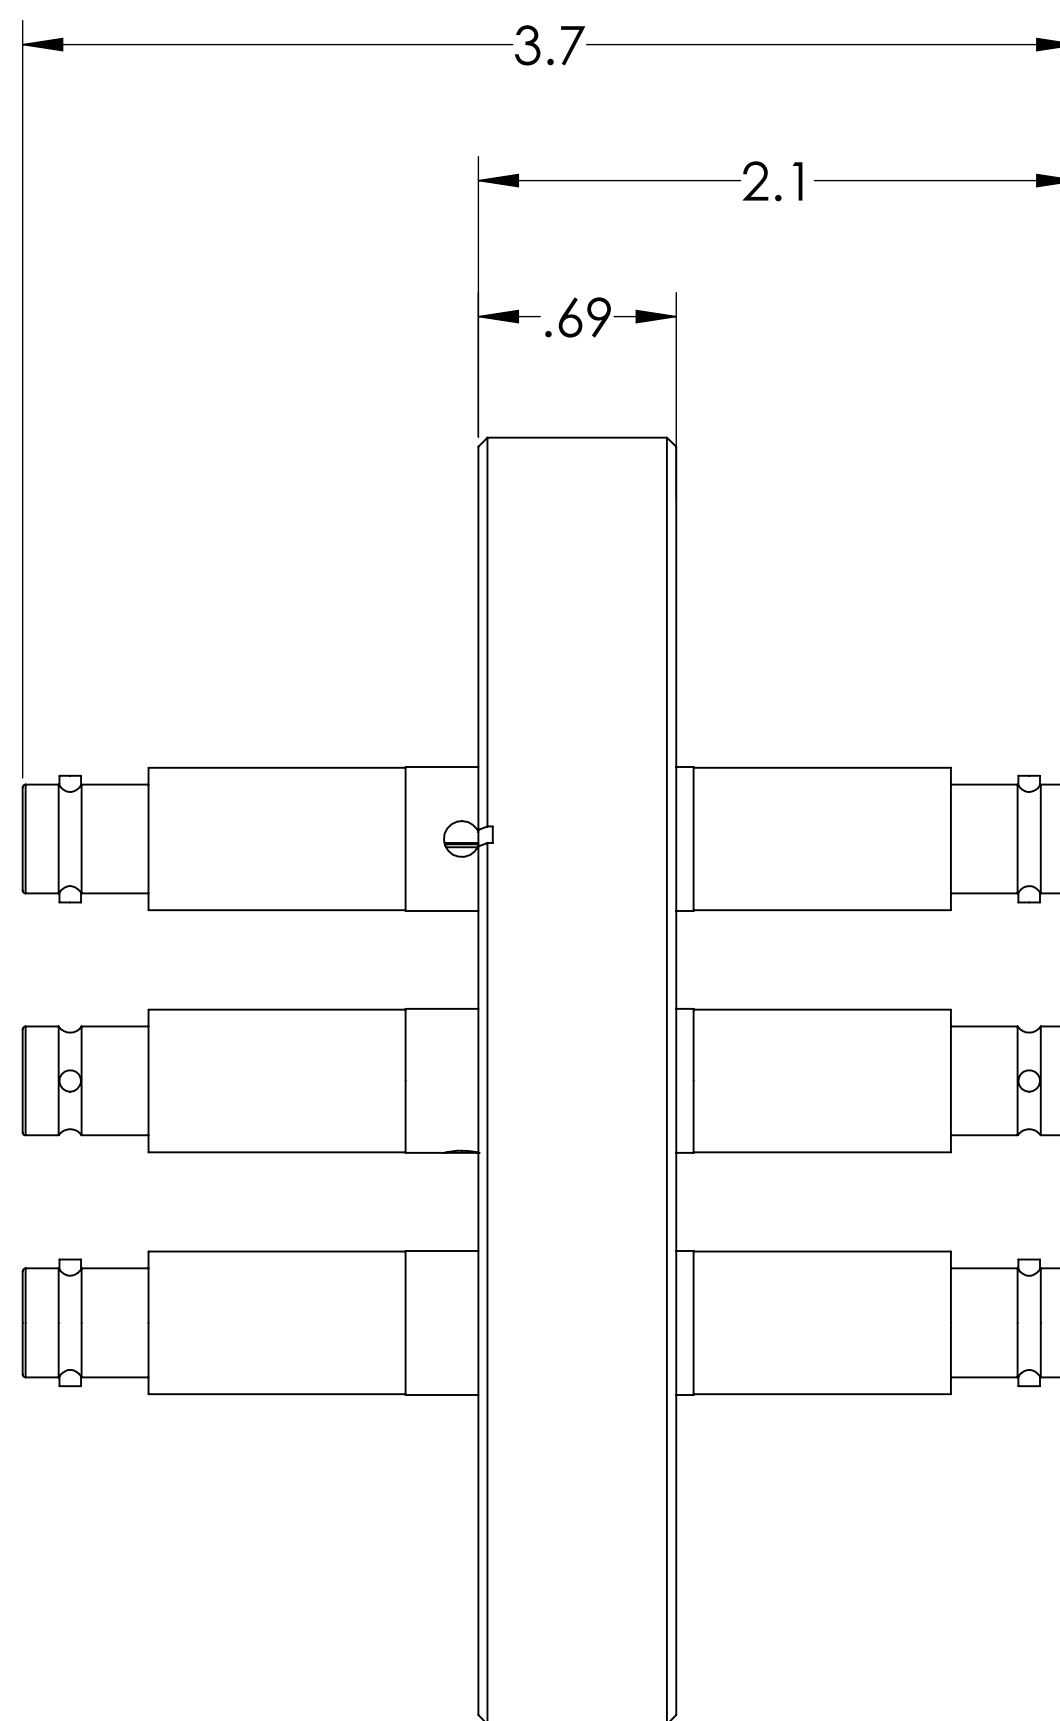


MPF PRODUCTS INC.

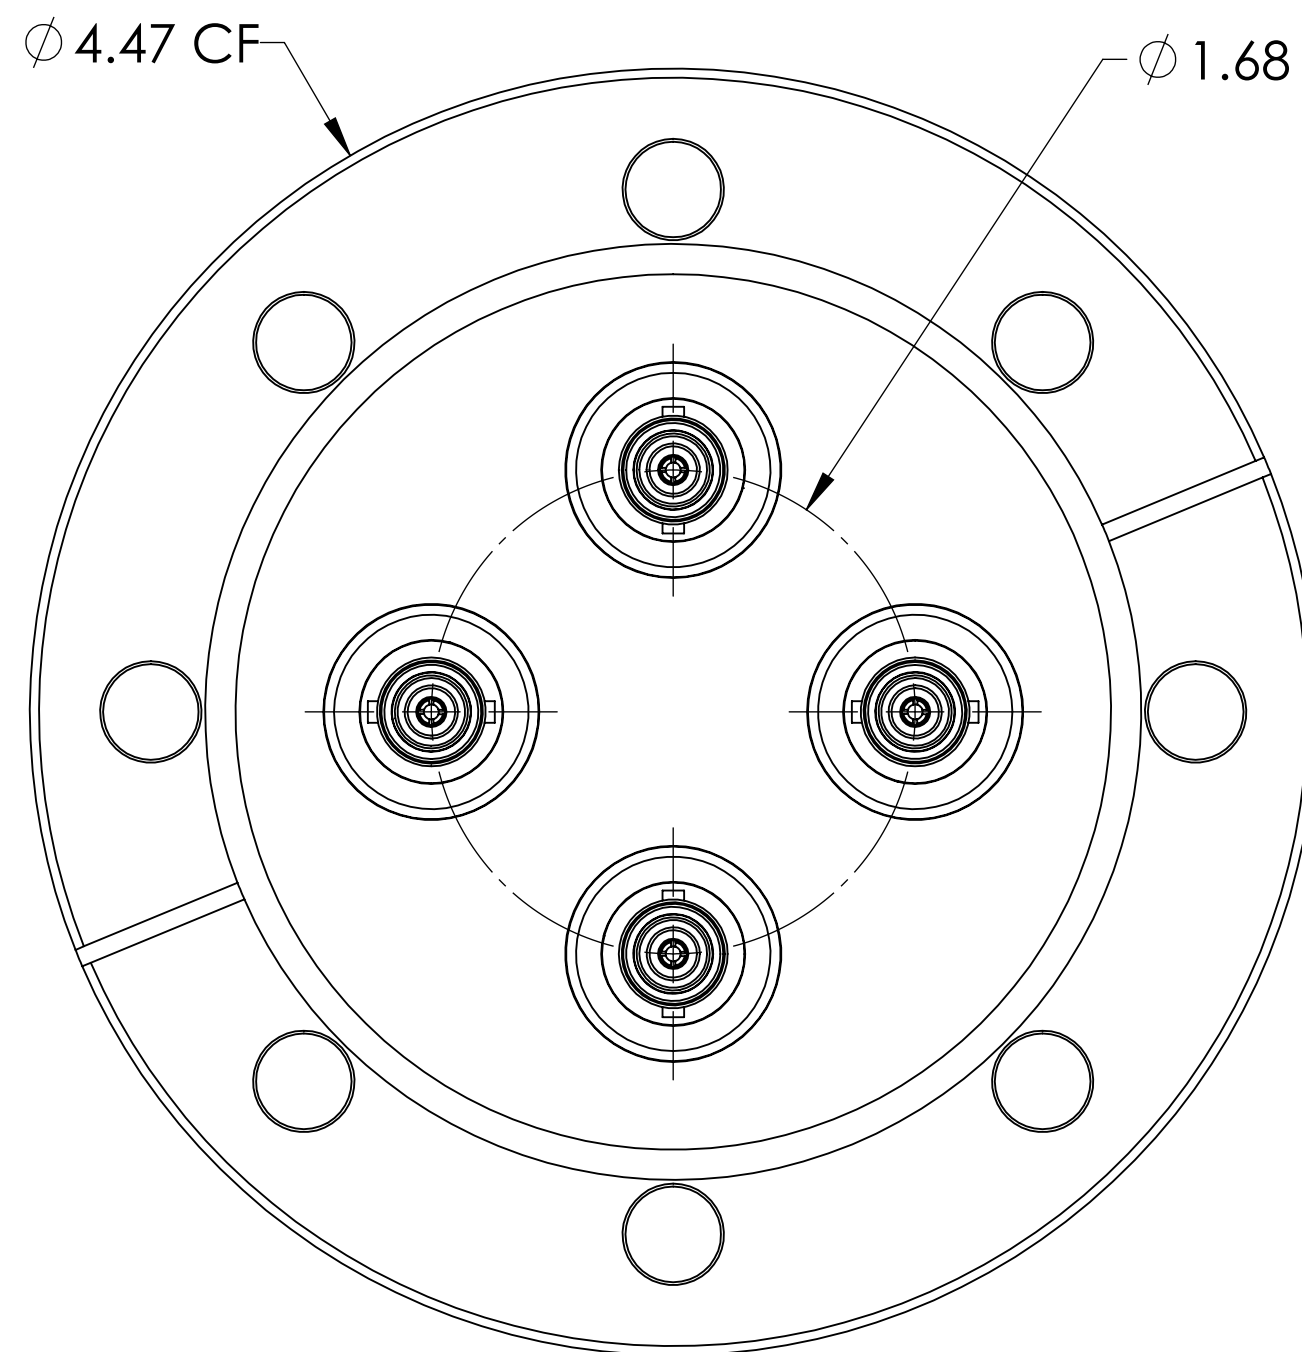

PART #	AIRSIDE CONNECTOR INCLUDED
A7231-1-CF	YES
A7231-2-CF	NO



NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 4 Pins, Grounded Shield, Double Ended, 4.50" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION	TITLE: BNC COAXIAL FEEDTHROUGH, 4 PINS, GROUNDED SHIELD, DOUBLE ENDED, 4.50" CONFLAT FLANGE	
PLATING	NEXT ASSY	USED ON	DWG. NO. A7231
	SURFACE FINISH:	63 OR BETTER	DOWNLOAD FROM MPFPI.COM REV
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
		Wednesday, October 10, 2018 8:54:41 AM	