


MPF PRODUCTS INC.

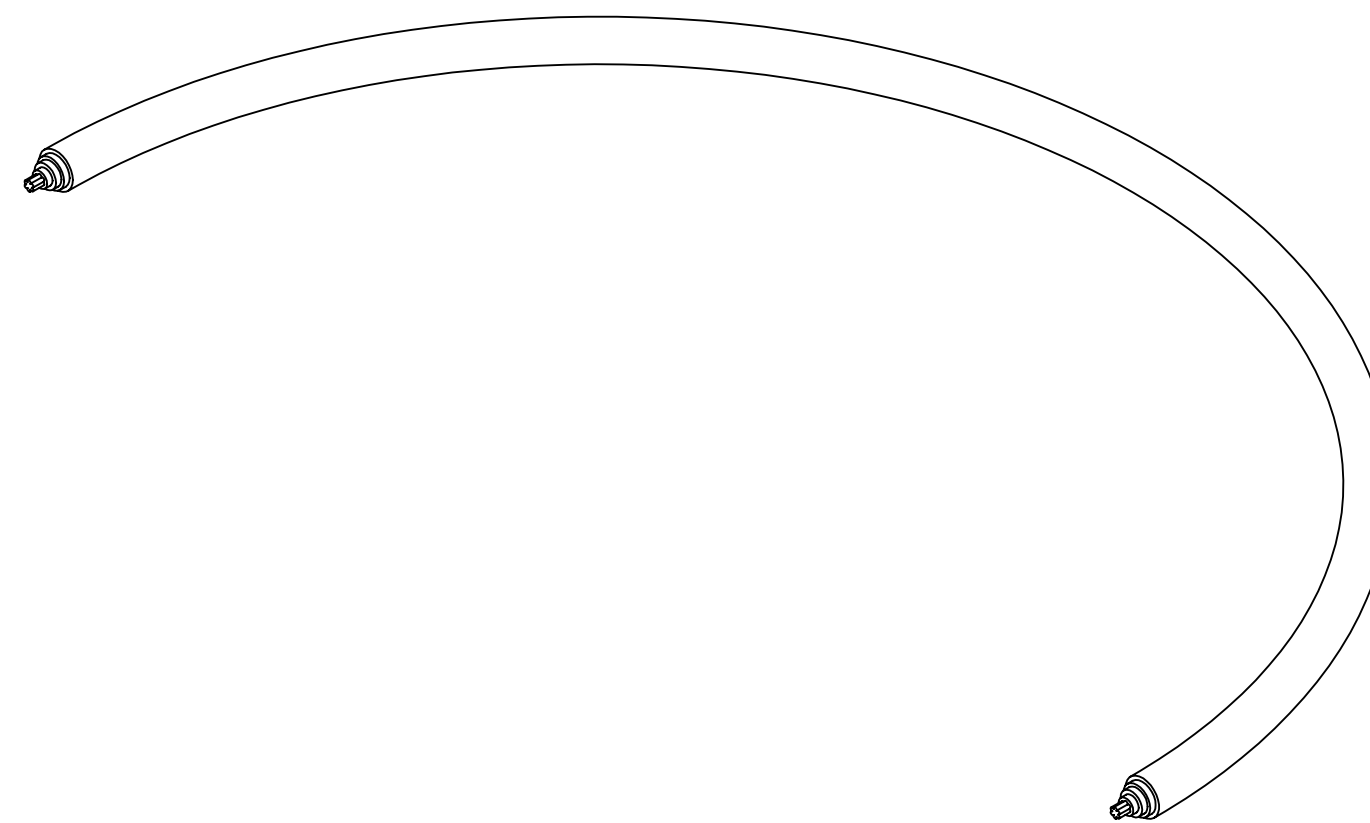

SPECIFICATIONS:

1. CABLE LENGTH: 15'
2. WIRE DIAMETER: 7 X 0.004
3. RESISTANCE: 353 Ohms/km @ 20°C MAX
4. VOLTAGE RATING: 600VAC/2kVDC
5. CURRENT RATING: 1.5A
6. MINIMUM BEND RADIUS: 0.45
7. UHV APPLICATIONS
8. TEMPERATURE RANGE: -75°C TO 250°C
9. DIELECTRIC CONSTANT: 2.9
10. DIELECTRIC STRENGTH: 80kV/mm
11. DISSIPATION FACTOR, 1MHz: 0.002
12. MOISTURE ABSORPTION: 0.4%@50%RH
13. RADIATION RESISTANCE: 109 RADS

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC. TITLE: KAPTON WIRE COAXIAL CABLE
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	9/11/2015	
MATERIAL	THIRD ANGLE:		
	APPLICATION		
	NEXT ASSY	USED ON	DOWNLOAD FROM MPFPI.COM DWG. NO.
FINISH	SURFACE FINISH: 63/ OR BETTER		A7326-2-WR
PLATING	UNLESS OTHERWISE SPECIFIED:		REV
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Tuesday, February 12, 2019 2:27:54 PM