
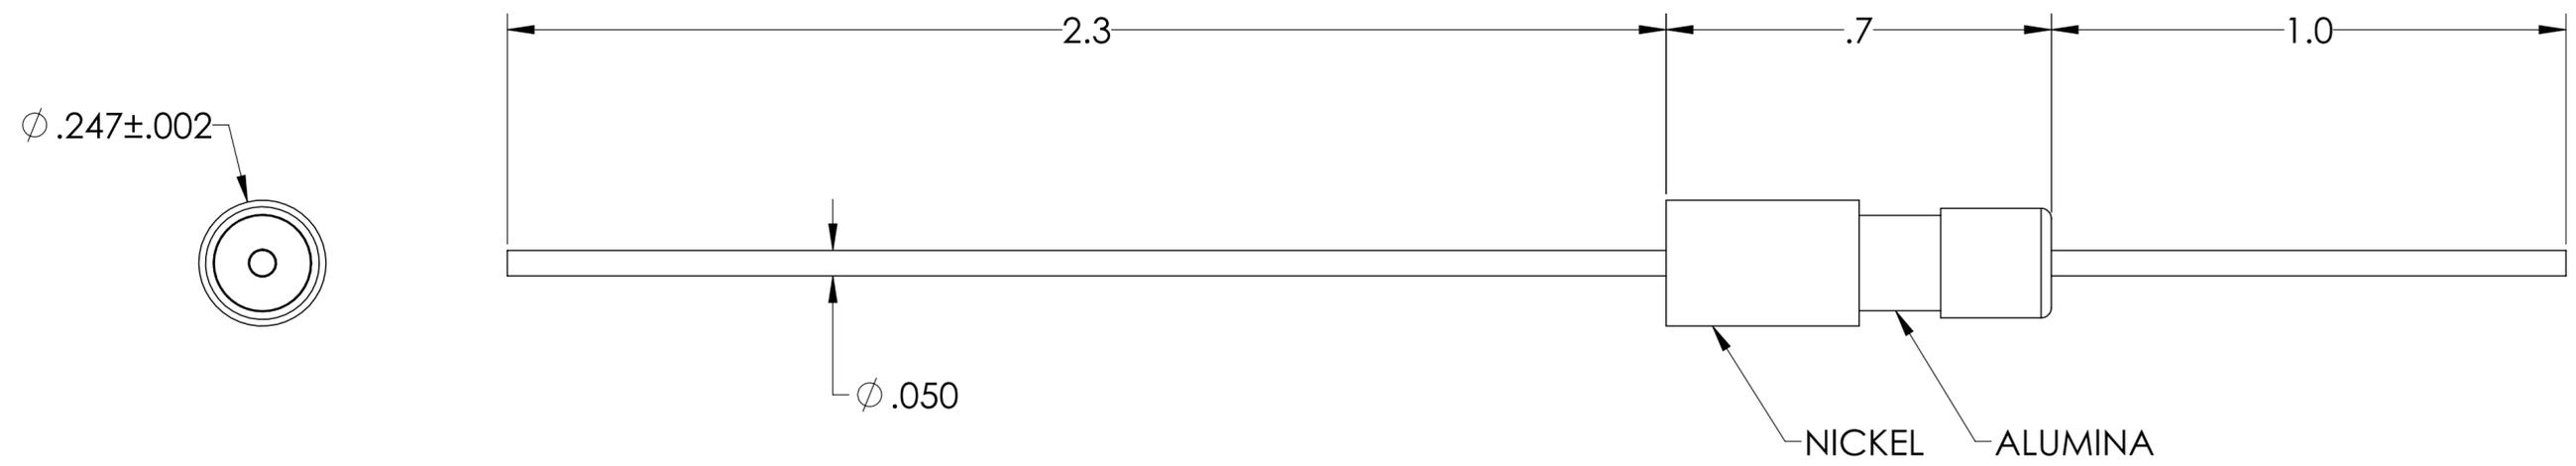


MPF PRODUCTS INC.

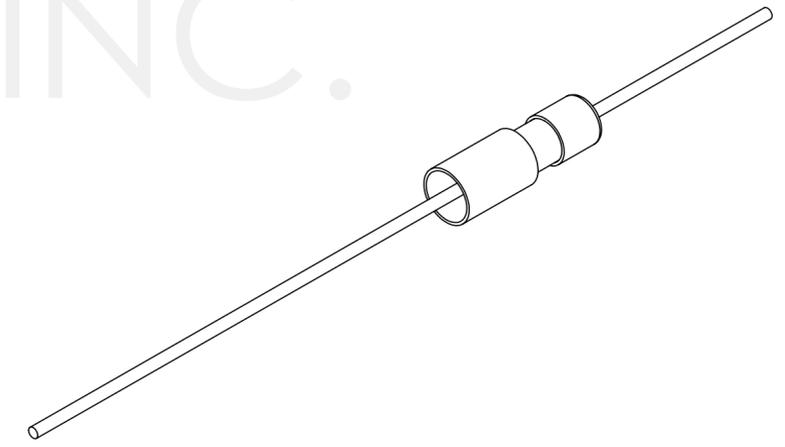

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A0076-1-W	304 STAINLESS STEEL	1 AMP
A0076-2-W	NICKEL 200	8 AMPS
A0076-3-W	OFHC COPPER	25 AMPS
A0076-6-W	MOLYBDENUM	13 AMPS

- NOTE:
- VOLTAGE: 2000 VOLTS DC
 - CURRENT: SEE TABLE
 - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 2000 Volts, 1 Pin, 0.050" Conductor, 0.247" Dia Nickel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		POWER FEEDTHROUGH, 2000 VOLTS, 1 PIN, 0.247" WELD ADAPTER	
		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH: 63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A0076	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
		Thursday, April 4, 2019 10:38:36 AM			