
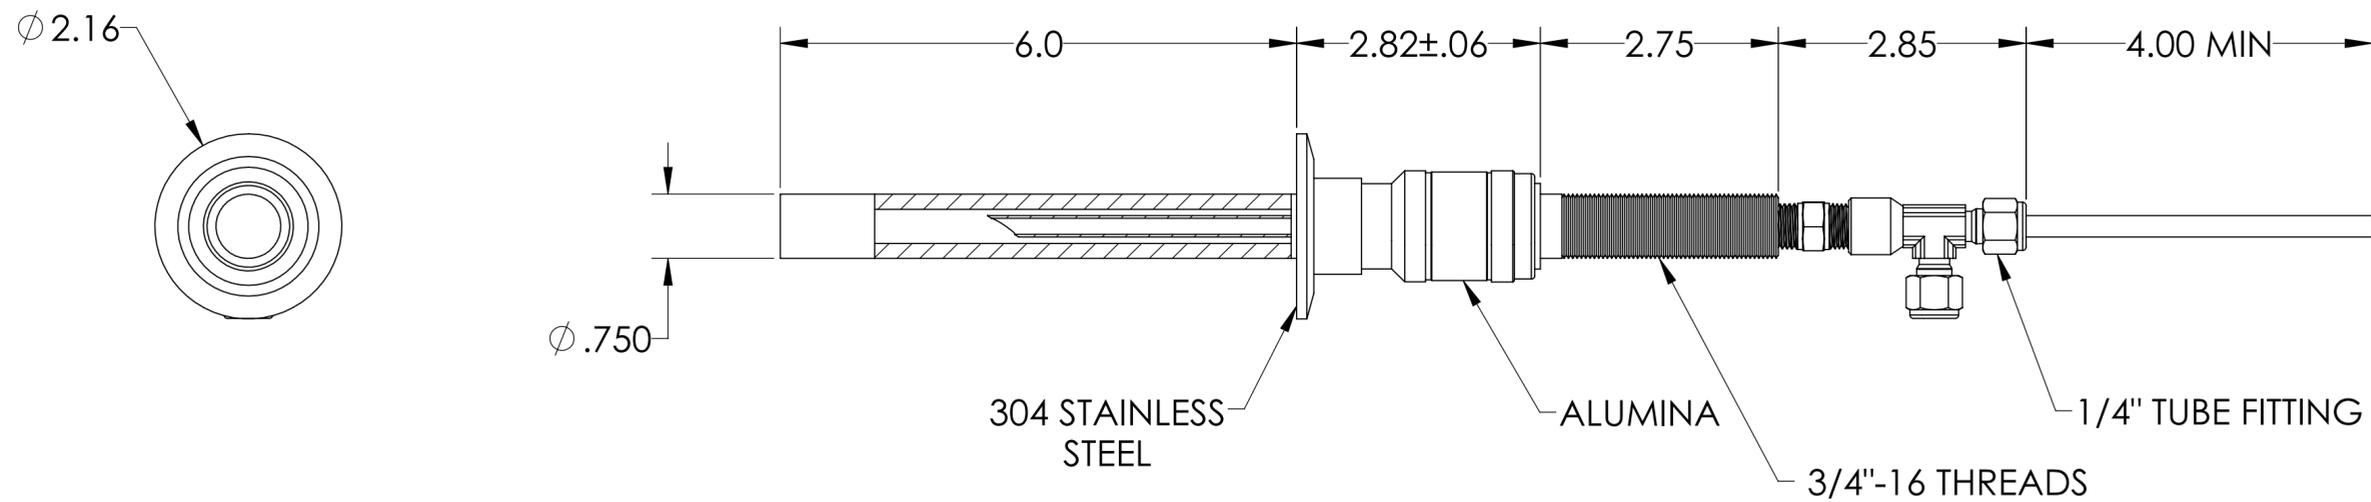


MPF PRODUCTS INC.

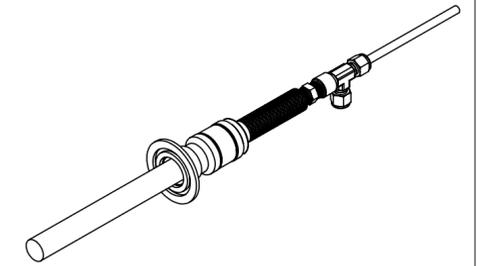

NOTE:

1. VOLTAGE: 8000 VOLTS DC
2. CURRENT: 1000 AMPS
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 8000 Volts, 1000 Amps, 1 Pin, 0.750" Copper Conductor, Water Cooled W/ T-Fitting, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		TITLE: POWER FEEDTHROUGH, 8000 VOLTS, 1000 AMPS, 1 PIN, WATER COOLED, 2.16" QF/KF DOWNLOADED FROM MPFPI.COM	
APPLICATION					
NEXT ASSY		USED ON			
FINISH		SURFACE FINISH: 63 OR BETTER			
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A11355-1-QF	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV.	
				Thursday, June 20, 2019 11:20:35 AM	