

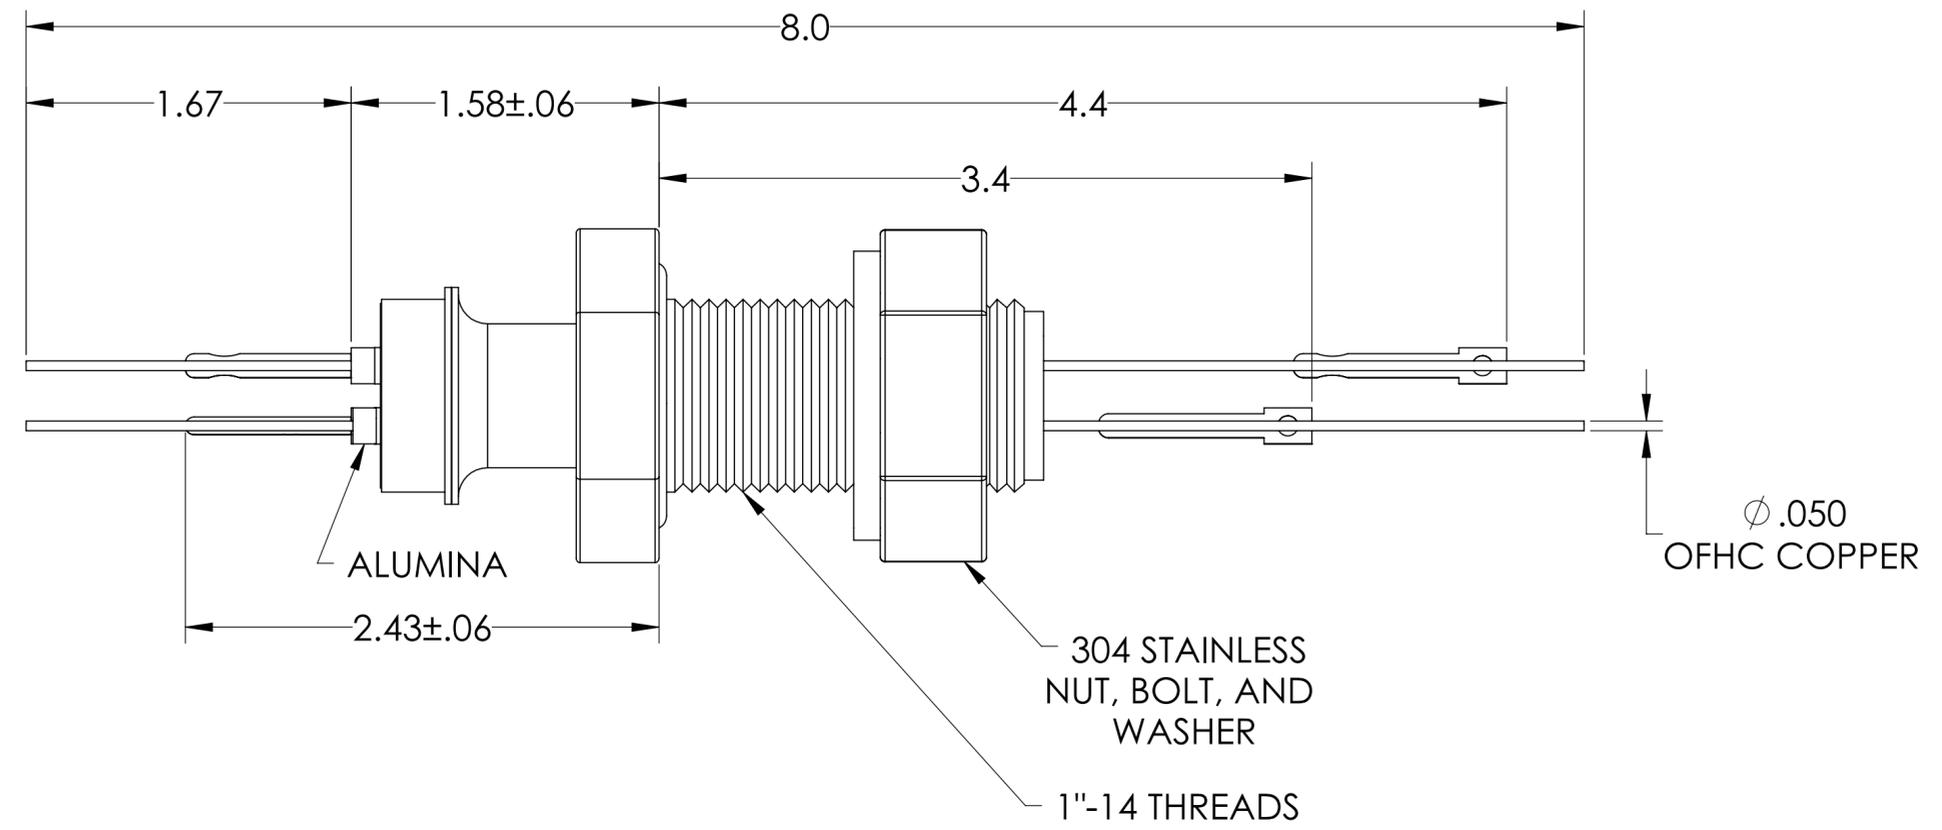
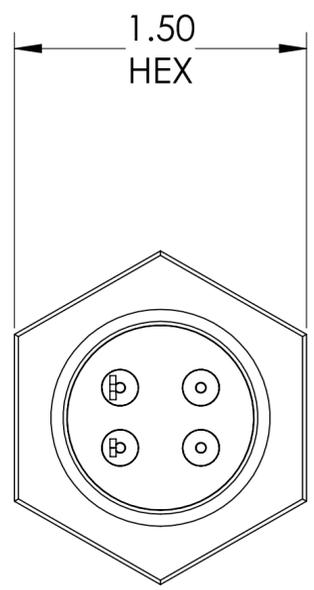


MPF PRODUCTS INC.

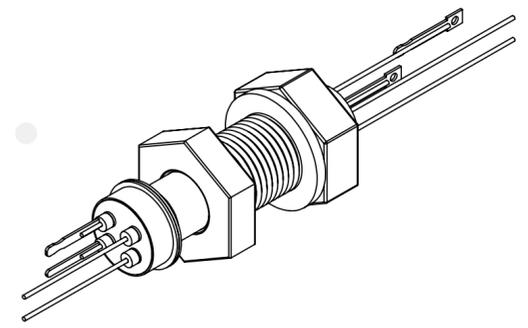

PART #	T/C TYPE
A12183-1	K
A12183-2	C
A12183-3	E
A12183-4	J

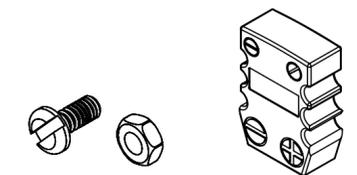

SPECIFICATIONS:

1. VOLTAGE: 1000 VOLTS DC
2. CURRENT: 25 AMPS
3. TEMPERATURE RATING: -100 TO 450°C
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple-Power Feedthrough, 1 Pair , w/ Miniature TC Connector, 1000 Volts, 25 Amps, 2 Pins, 1" Baseplate

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:	TITLE:	
		THERMOCOUPLE-POWER, 1 PAIR, 1000V, 25A, 2 PINS, 1" BASEPLATE	
FINISH	APPLICATION	DOWNLOADED FROM MPFPI.COM	
PLATING	SURFACE FINISH: 63 OR BETTER	DWG. NO.	REV
	UNLESS OTHERWISE SPECIFIED:	A12183	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	Wednesday, December 2, 2020 2:24:20 PM	