
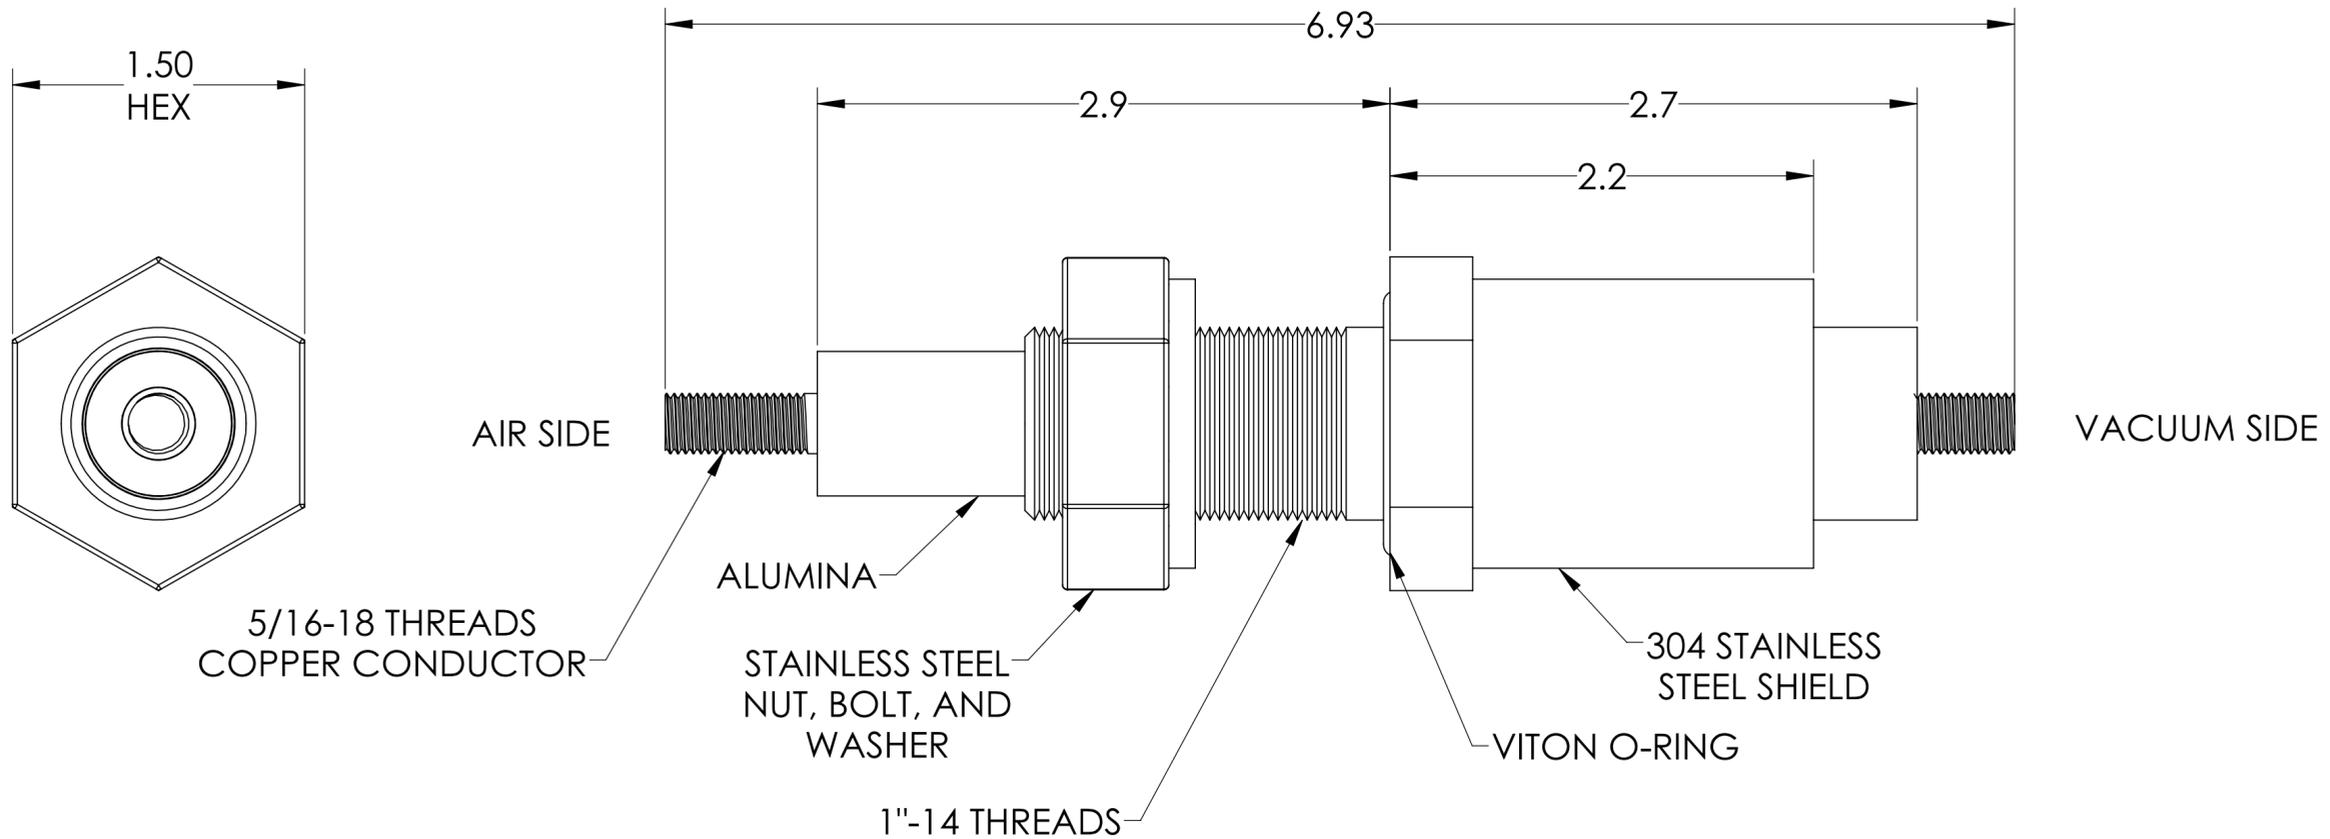


MPF PRODUCTS INC.

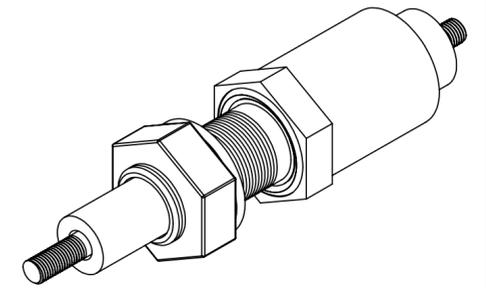

NOTE:

1. VOLTAGE: 12KV DC IN VACUUM
2. CURRENT: 150 AMPS
3. TEMPERATURE RATING: N/A

E-Beam Feedthrough, 12,000 Volts, 1 Pin, With Sputter Shield, 1" Baseplate Bolt

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION		
PLATING	NEXT ASSY USED ON		
	SURFACE FINISH: 63 OR BETTER		
	UNLESS OTHERWISE SPECIFIED:		
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
TITLE:		MPF PRODUCTS INC.	
POWER FEEDTHROUGH, 12KV, 150A, 1 PIN, 1" BASEPLATE, SPUTTER SHIELD		DWG. NO.	
DOWNLOADED FROM MPFPI.COM		A13968-1-BP	
TUESDAY, JUNE 11, 2019 8:00:48 AM		REV	