
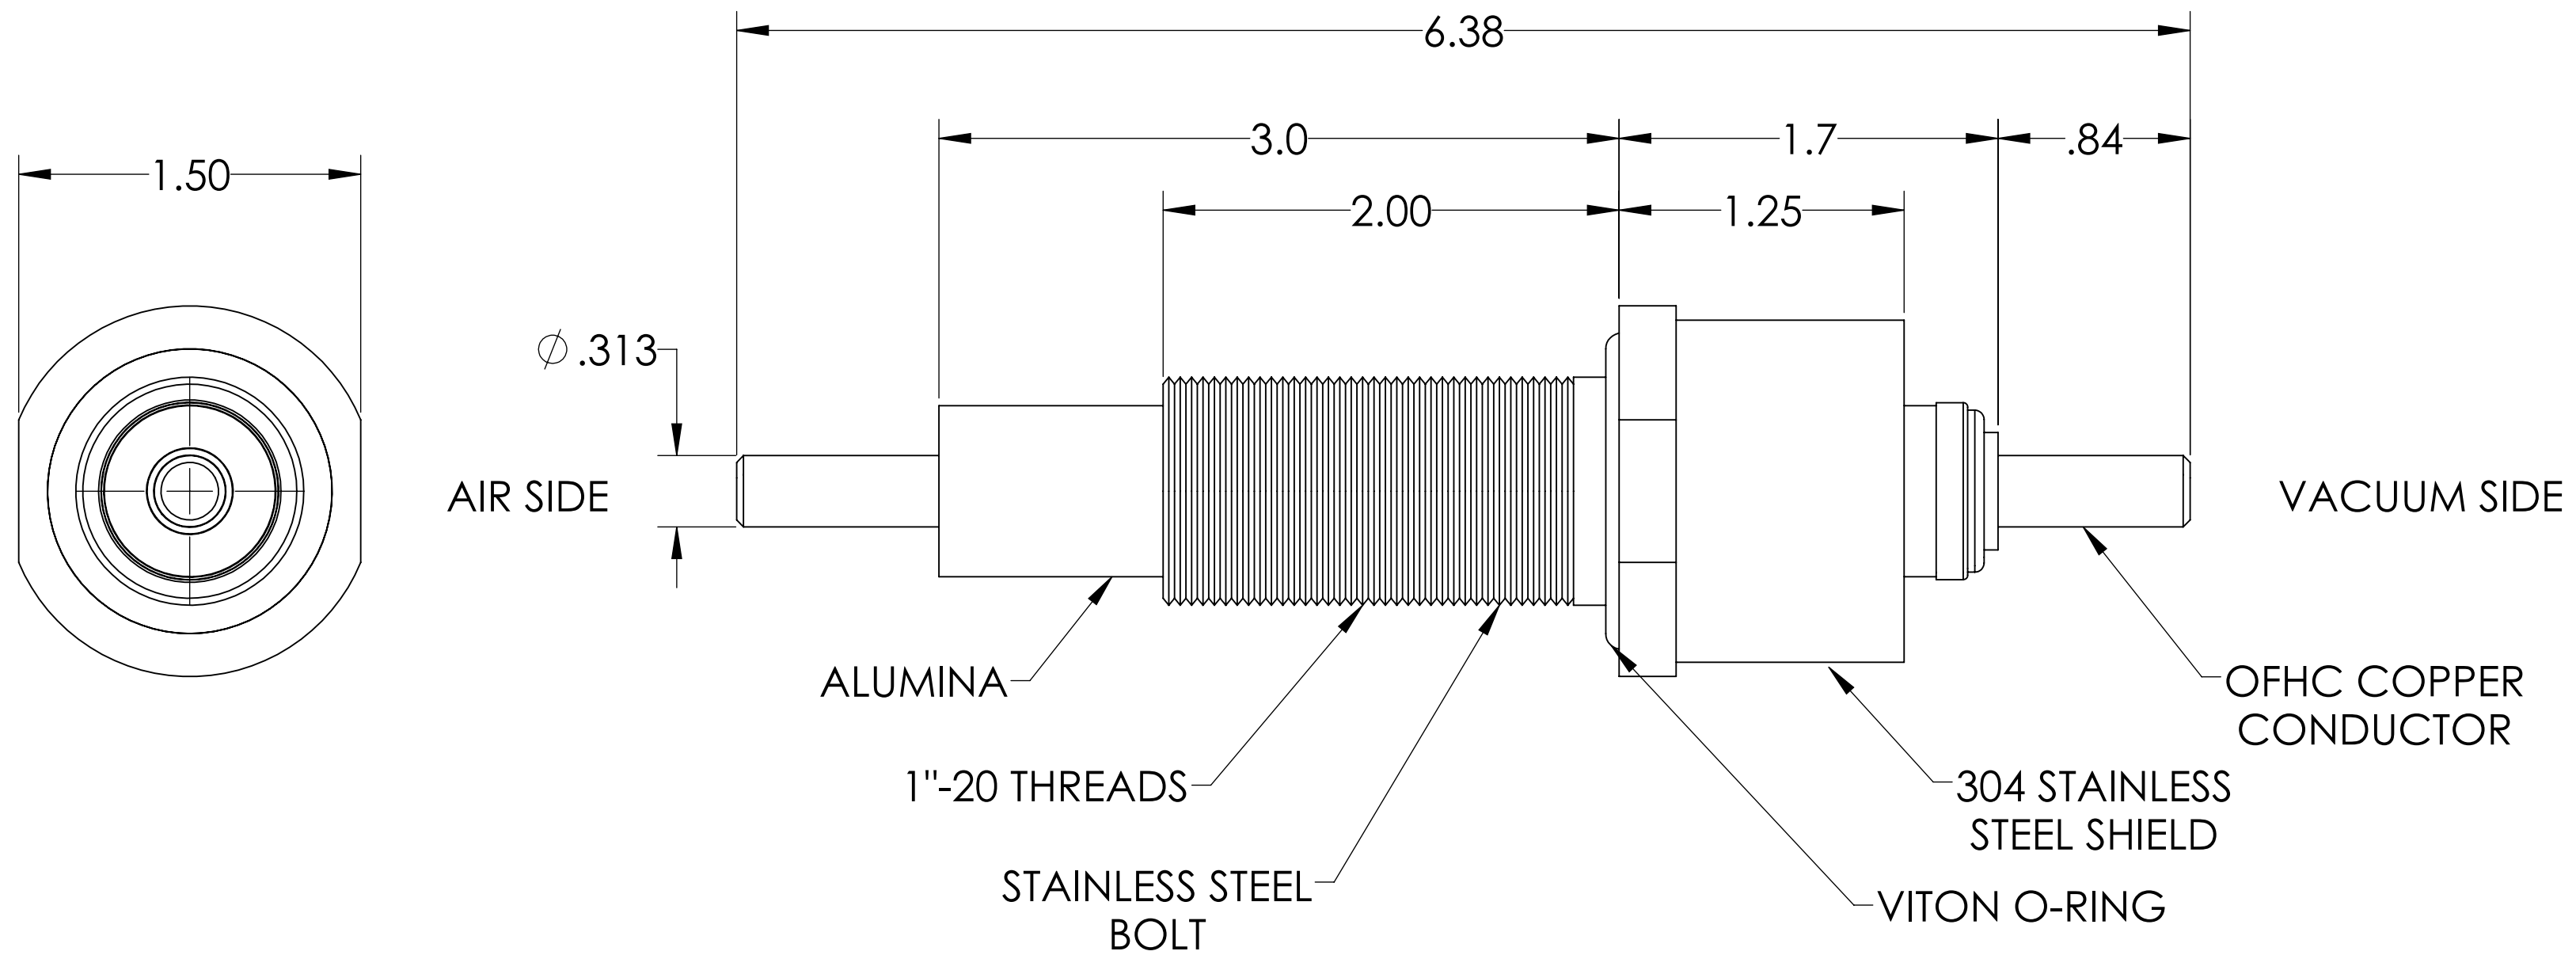


# MPF PRODUCTS INC.

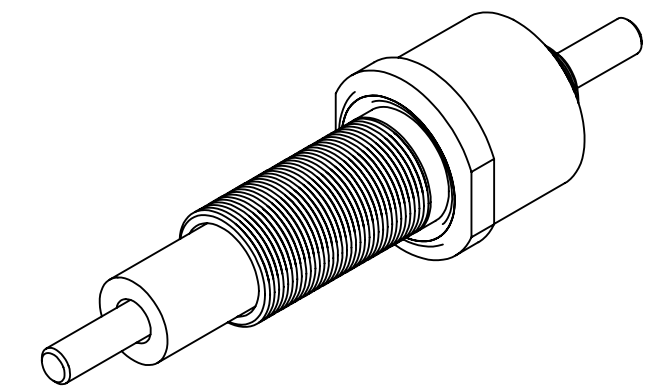

- NOTE:**
1. VOLTAGE: 15KV DC IN VACUUM
  2. CURRENT: 200 AMPS
  3. TEMPERATURE RATING: N/A

E-Beam Feedthrough, 15,000 Volts, 1 Pin, With Sputter Shield, 1" Baseplate Bolt

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A					
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE				
ANGULAR: MACH $\pm 1/2^\circ$	WJ	WJ	9/11/2015				
TWO PLACE DECIMAL $\pm .030$	CHECKED		9/11/2015				
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ	9/11/2015				
MATERIAL	THIRD ANGLE:						
FINISH	APPLICATION	<table border="1"> <tr> <th>NEXT ASSY</th> <th>USED ON</th> </tr> <tr> <td> </td> <td> </td> </tr> </table>		NEXT ASSY	USED ON		
NEXT ASSY	USED ON						
PLATING	SURFACE FINISH:	63/ OR BETTER					
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
	TITLE:	POWER FEEDTHROUGH, 15KV, 200A, 1 PIN, 1" BASEPLATE, SPUTTER SHIELD					
	DOWNLOADED FROM MPFPI.COM						
	DWG. NO.	A4611-1-BP	REV				
	Tuesday, June 11, 2019 8:35:06 AM						