
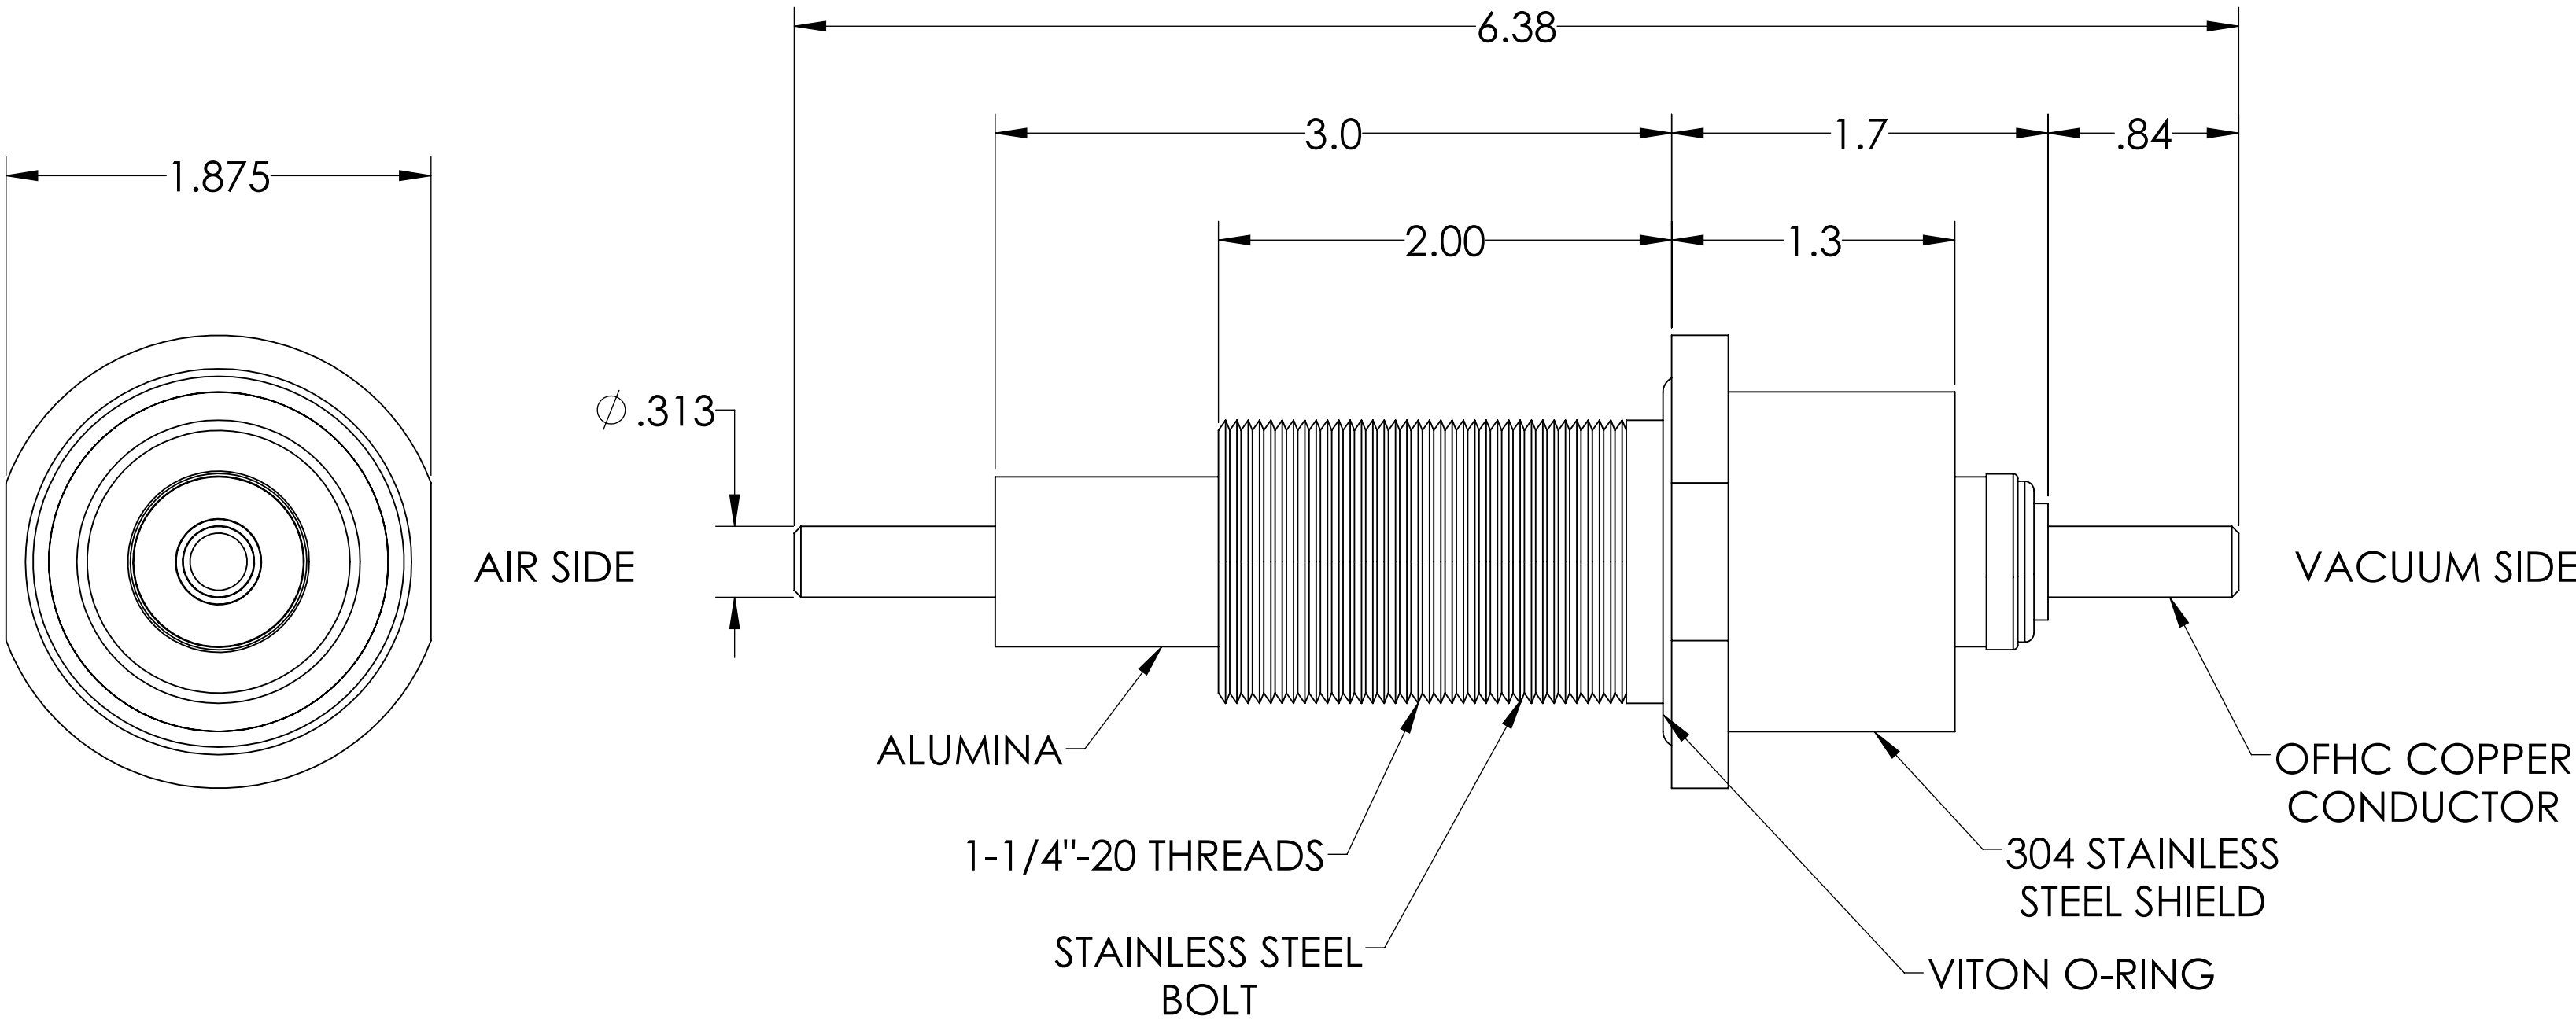


MPF PRODUCTS INC.

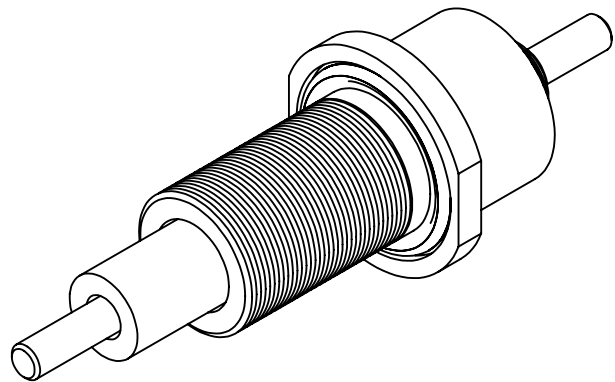

NOTE:  
1. VOLTAGE: 15KV DC IN VACUUM  
2. CURRENT: 200 AMPS  
3. TEMPERATURE RATING: N/A

E-Beam Feedthrough, 15,000 Volts, 1 Pin, With Sputter Shield, 1" Baseplate Bolt

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015  MATERIAL		DRAWN	WJ	DATE	9/11/2015
		CHECKED			9/11/2015
		ENG APPR.	WJ		9/11/2015
		THIRD ANGLE:			
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
		TITLE:		POWER FEEDTHROUGH, 15KV, 200A, 1 PIN, 1" BASEPLATE, SPUTTER SHIELD	
		DWG. NO.		A4612-1-BP	
		REV		REV	