
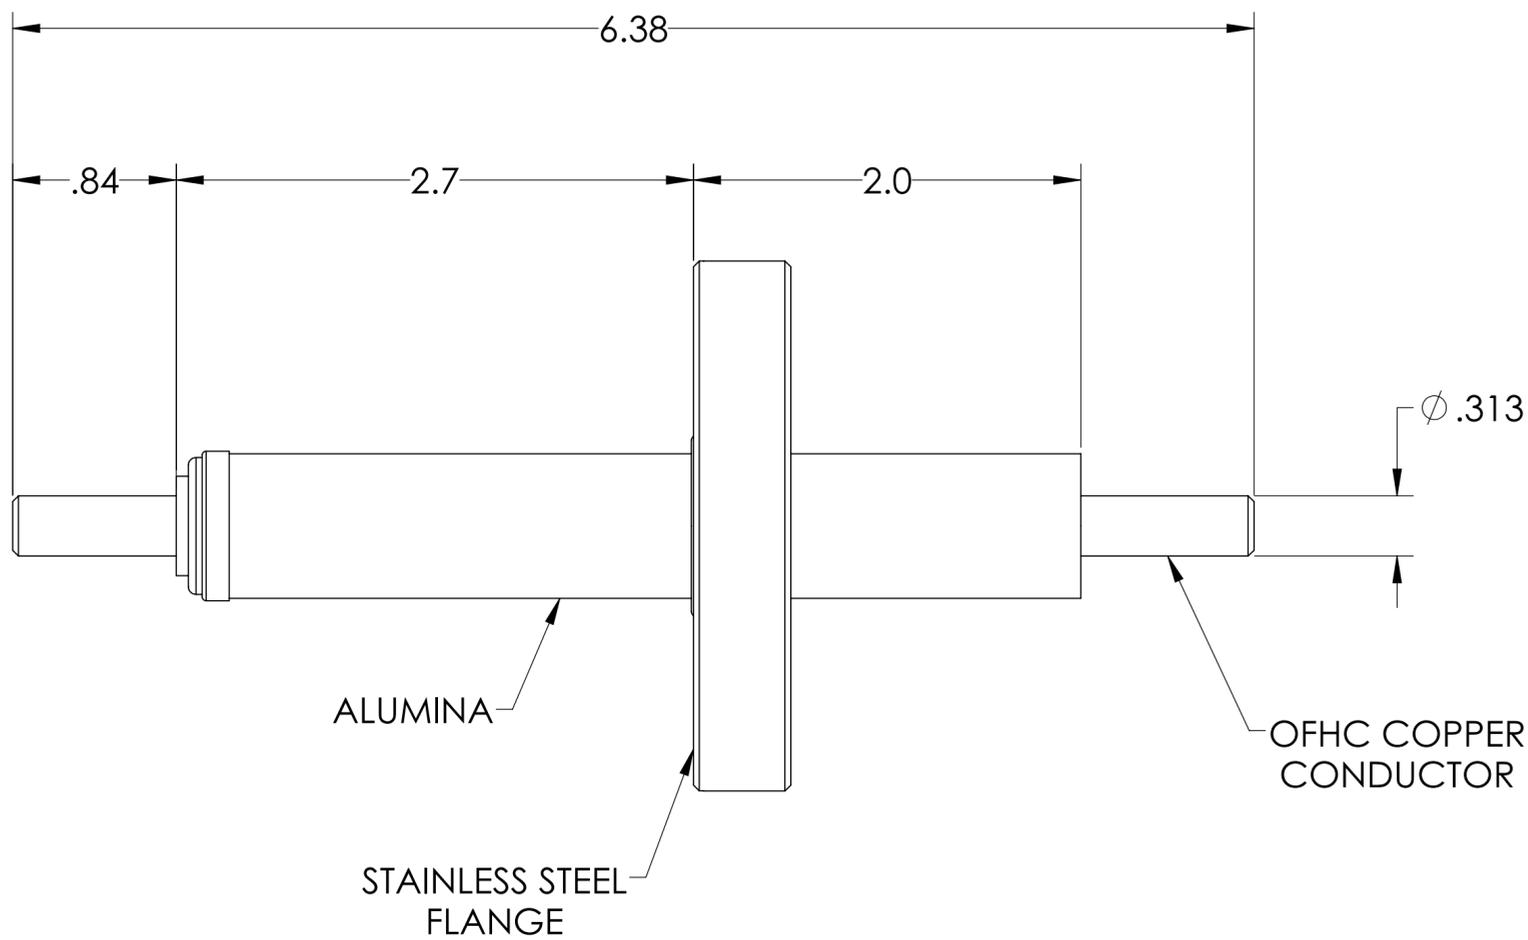
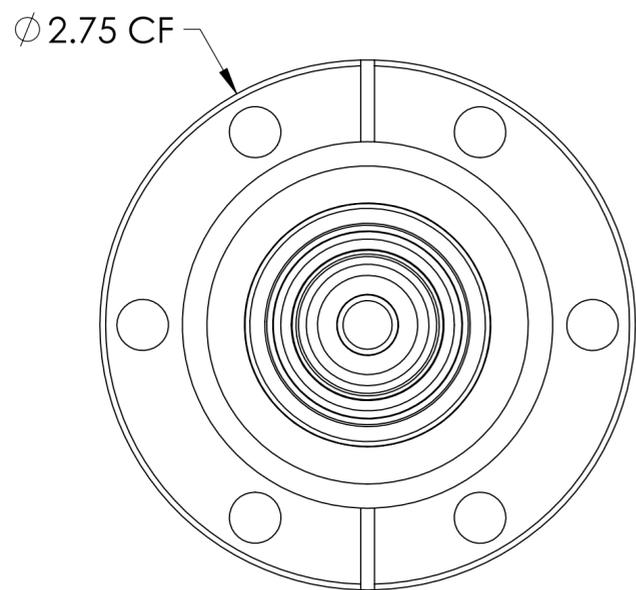


MPF PRODUCTS INC.

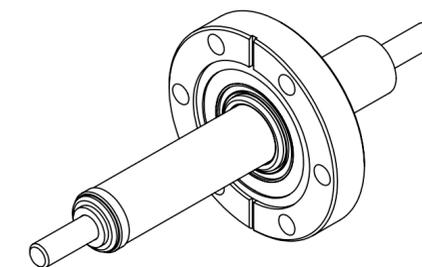

- NOTE:
1. VOLTAGE: 15KV DC IN VACUUM
 2. CURRENT: 200 AMPS
 3. TEMPERATURE RATING: N/A

E-Beam Feedthrough, 15,000 Volts, 1 Pin, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	9/11/2015	
MATERIAL	THIRD ANGLE:		TITLE: POWER FEEDTHROUGH, 15KV, 90A, 1 PIN, 2.75" CONFLAT FLANGE
FINISH	APPLICATION		DWG. NO. A4613-1-CF
PLATING	NEXT ASSY	USED ON	
	SURFACE FINISH: 63 OR BETTER		REV
	UNLESS OTHERWISE SPECIFIED:		Downloaded from MPFPI.COM
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Tuesday, June 11, 2019 8:32:27 AM