
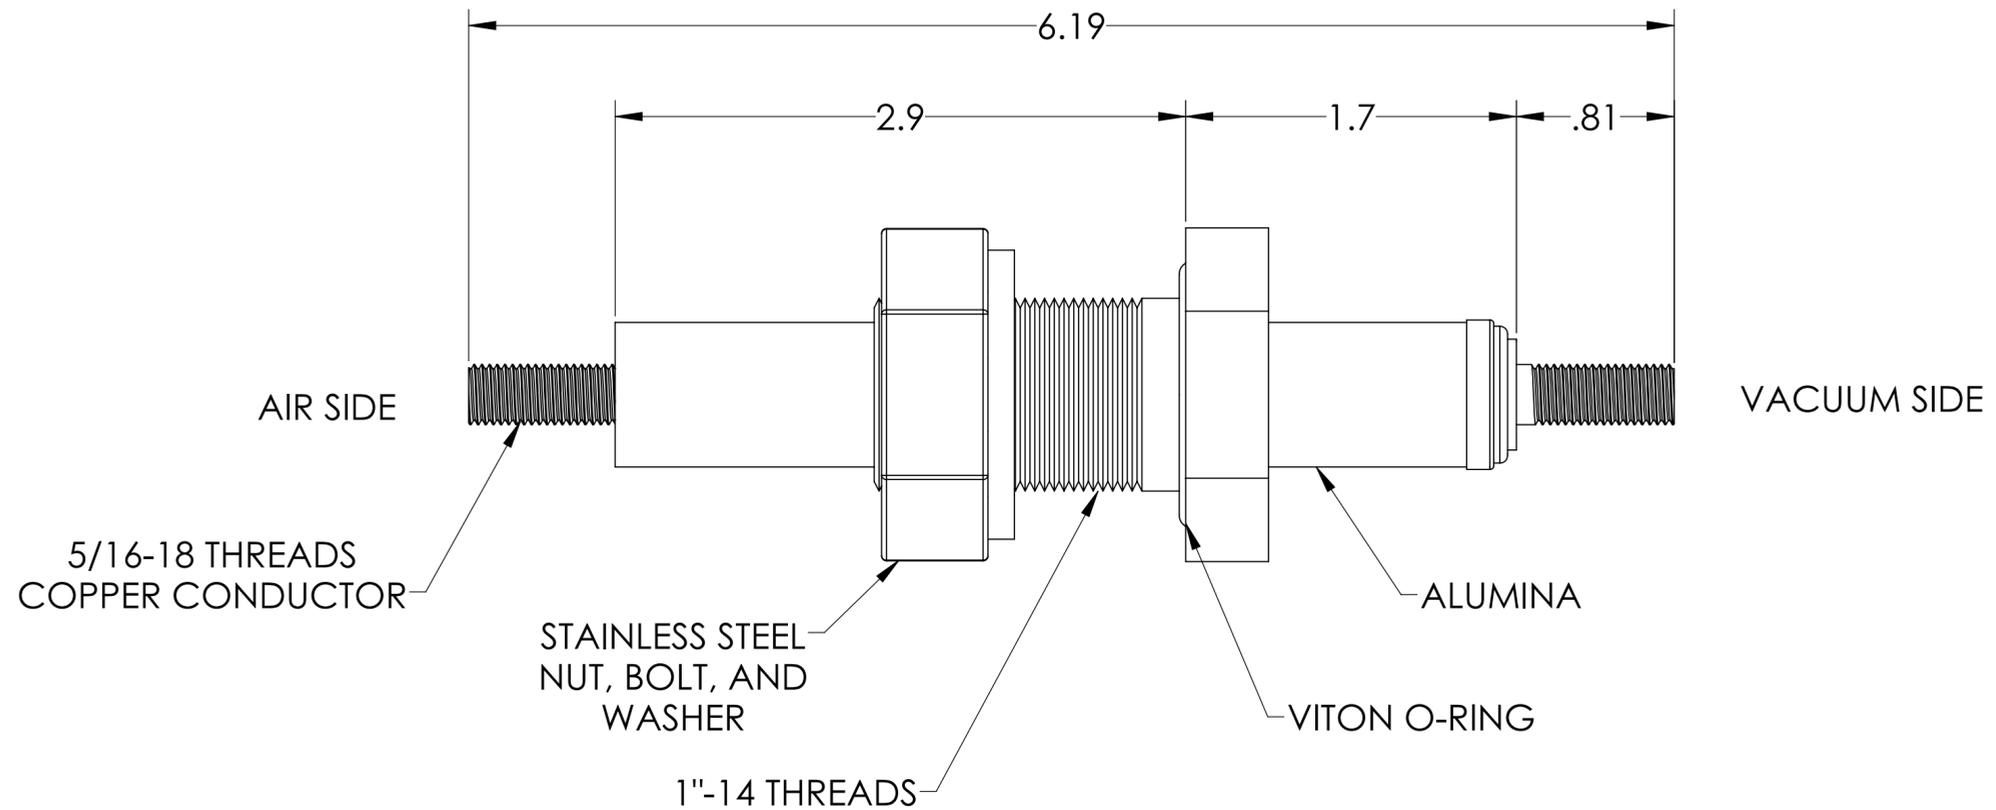
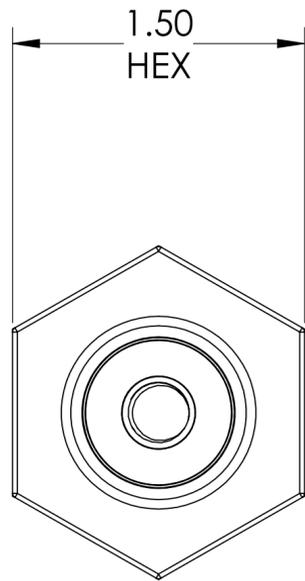


# MPF PRODUCTS INC.

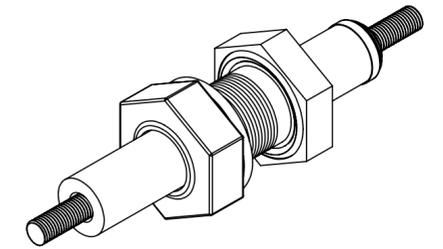

**NOTE:**

1. VOLTAGE: 12KV DC IN VACUUM
2. CURRENT: 150 AMPS
3. TEMPERATURE RATING: N/A

E-Beam Feedthrough, 12,000 Volts, 1 Pin, 1" Baseplate Bolt

|   |  |   |           |  |     |
|---|--|---|-----------|--|-----|
| UNLESS OTHERWISE SPECIFIED:             |  | QUOTATION #   |           | N/A  |     |
| DIMENSIONS ARE IN INCHES<br>TOLERANCES: |  | NAME  | DATE      | MPF PRODUCTS INC.  |     |
| ANGULAR: MACH ± 1/2°                    |  | DRAWN   | 9/11/2015 |  |     |
| TWO PLACE DECIMAL ± .030                |  | CHECKED   | 9/11/2015 |  |     |
| THREE PLACE DECIMAL ± .015              |  | ENG APPR.   | 9/11/2015 |  |     |
| MATERIAL                                |  | THIRD ANGLE:  |           | POWER FEEDTHROUGH,<br>12KV, 150A, 1 PIN,<br>1" BASEPLATE |     |
| FINISH                                  |  | APPLICATION   |           |  |     |
| PLATING                                 |  | NEXT ASSY   | USED ON   |  |     |
|   |  | SURFACE FINISH: 63/ OR BETTER   |           |  |     |
|   |  | UNLESS OTHERWISE SPECIFIED:   |           | DOWNLOADED FROM MPFPI.COM                                |     |
|   |  | ALL DIAMETERS CONCENTRIC WITHIN .005.<br>REMOVE ALL BURRS AND SHARP EDGES |           | DWG. NO.   | REV |
|   |  |   |           | A6202-1-BP   |     |
|   |  |   |           | Tuesday, June 11, 2019 8:03:00 AM                        |     |