
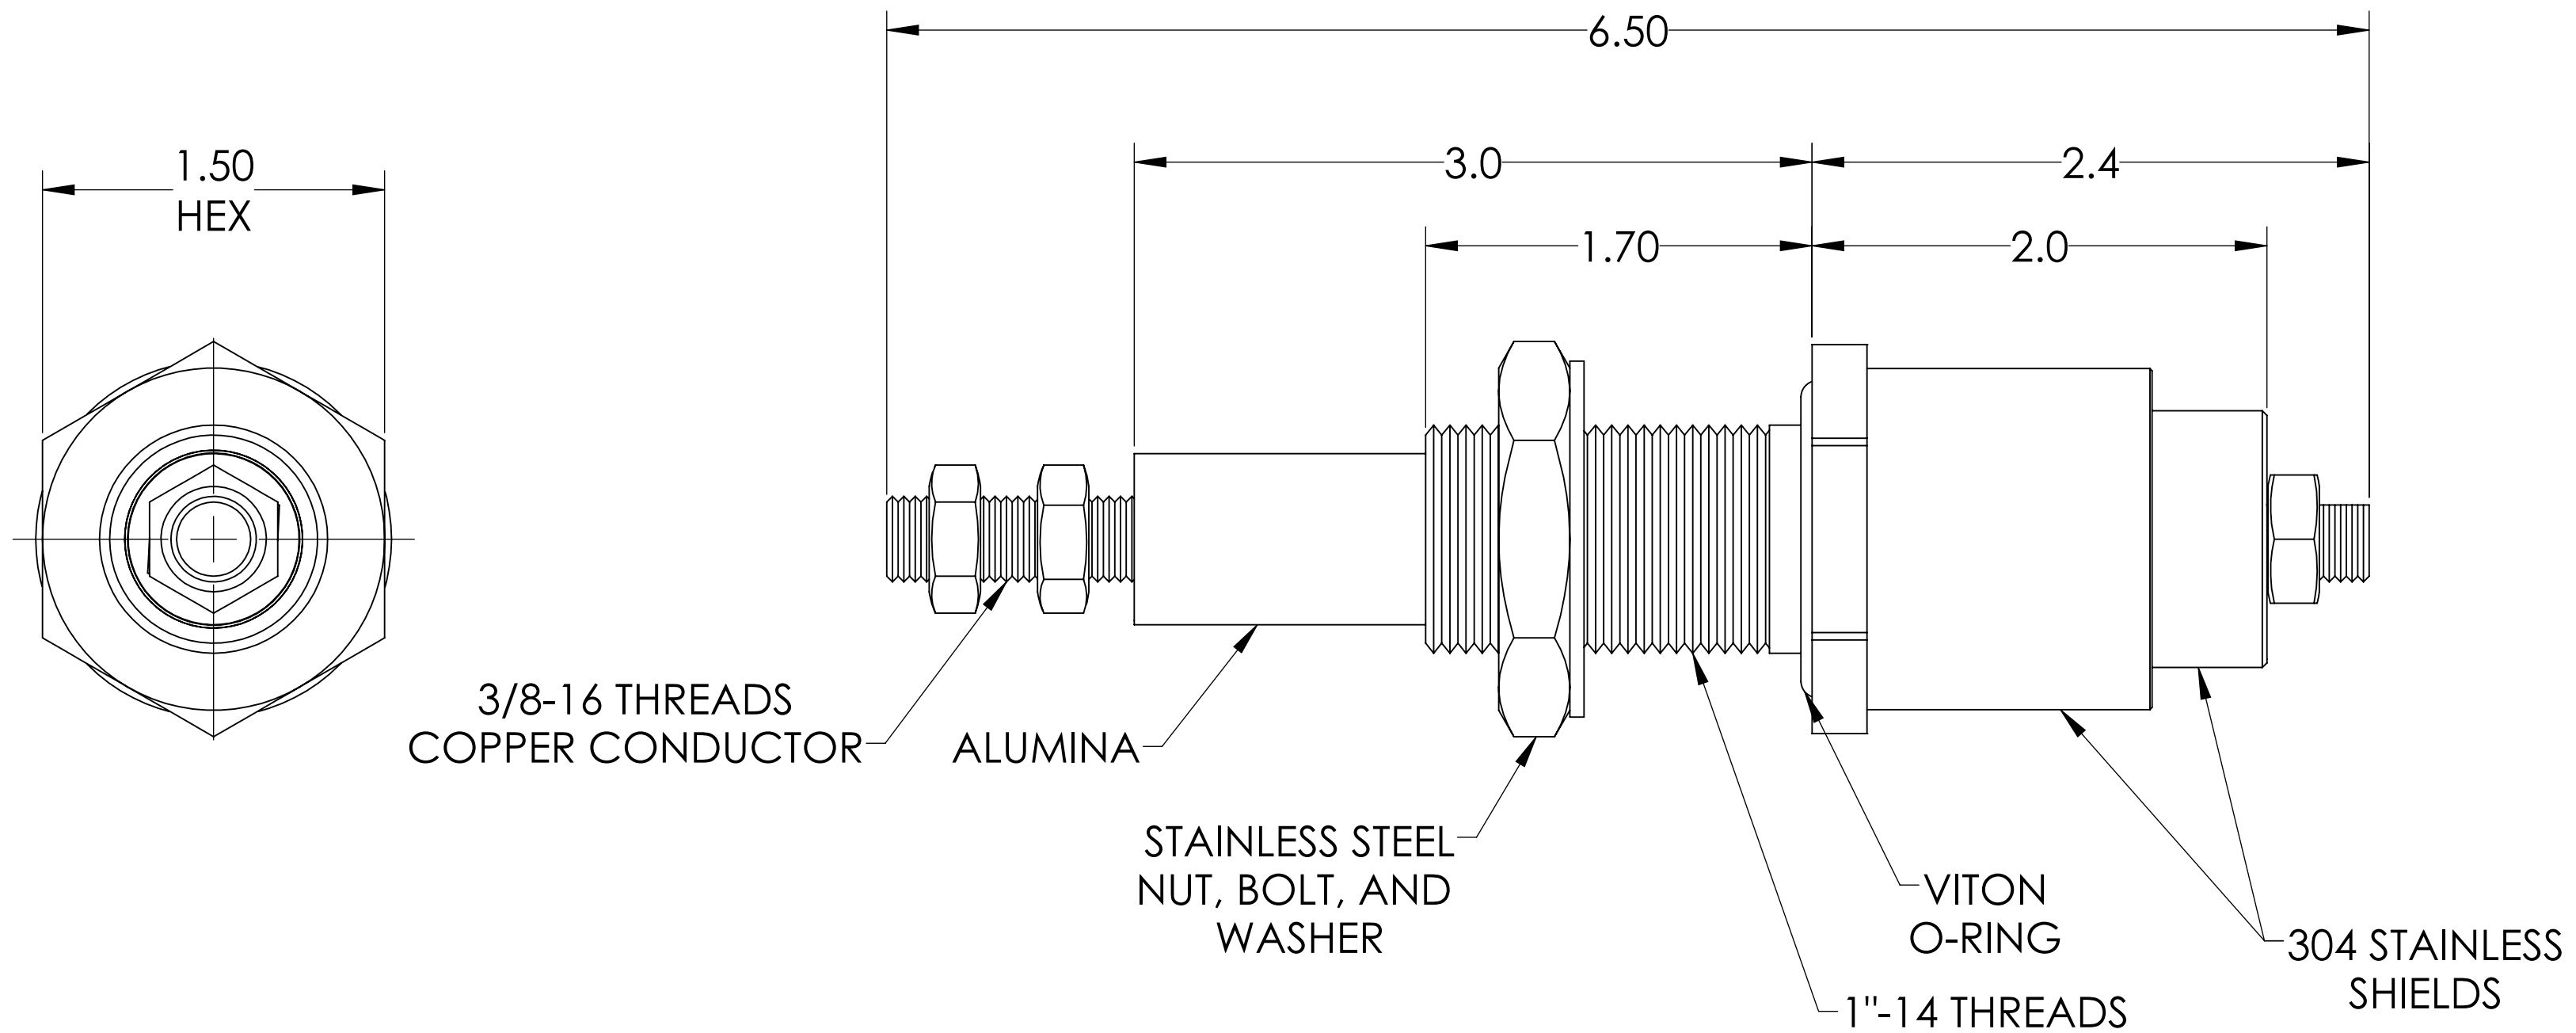


# MPF PRODUCTS INC.

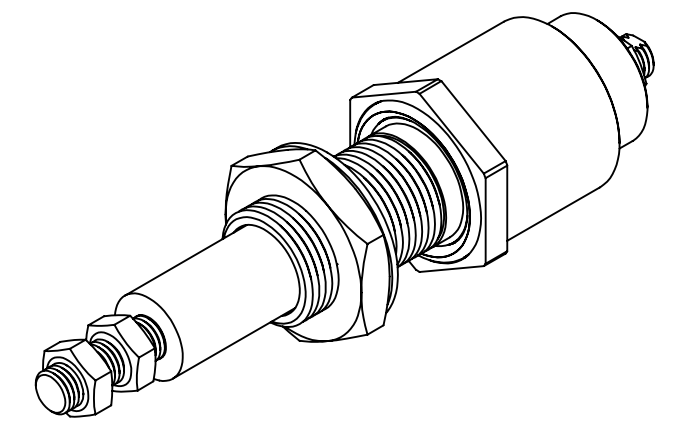

**NOTE:**

1. VOLTAGE: 12KV DC IN VACUUM
2. CURRENT: 150 AMPS
3. TEMPERATURE RATING: -100 TO 450°C

E-Beam Power Feedthrough, 12,000 Volts, 1 Pin, 1" Baseplate Bolt, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		E-BEAM POWER FEEDTHROUGH, 12KV, 150A, 1 PIN, 1" BASEPLATE WITH SPUTTER SHIELDS	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH: 63 OR BETTER		SURFACE FINISH: 63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
UNLESS OTHERWISE SPECIFIED:		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A6297-1-BP	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV.	
				Monday, April 24, 2023 12:57:01 PM	