
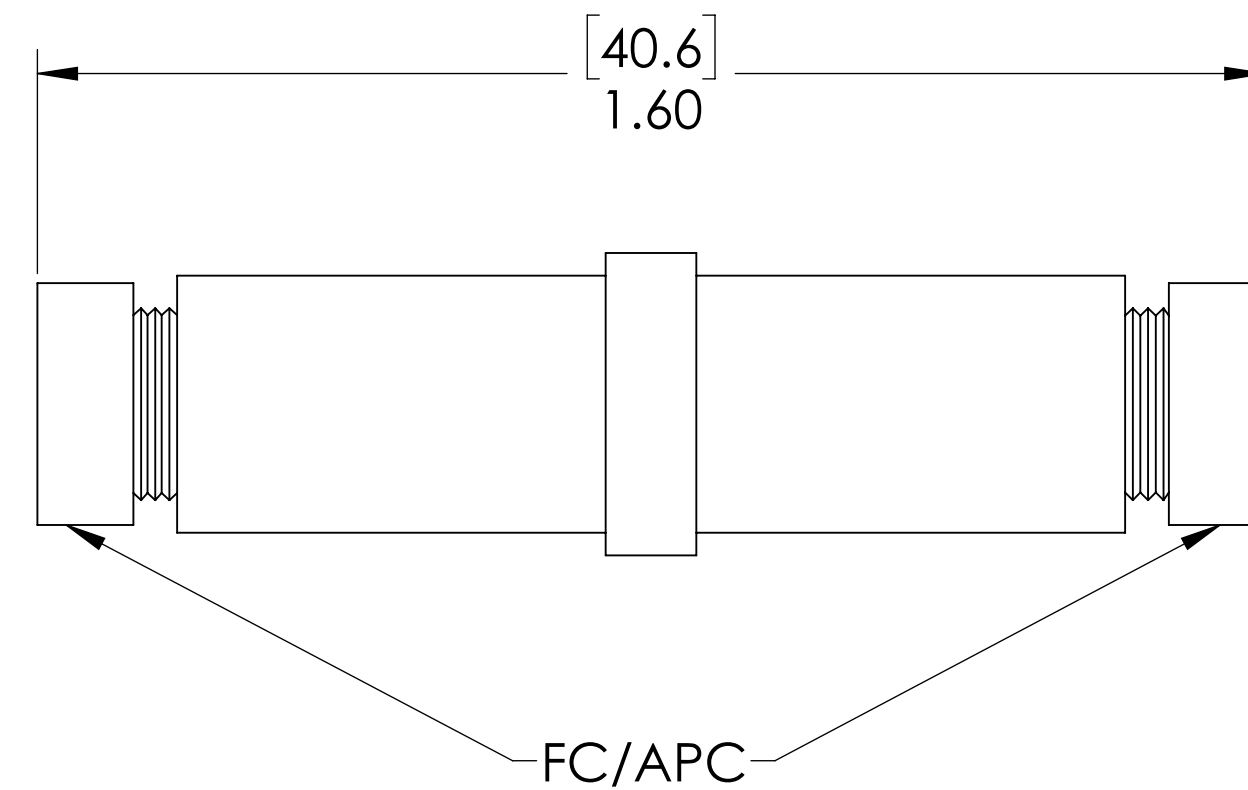
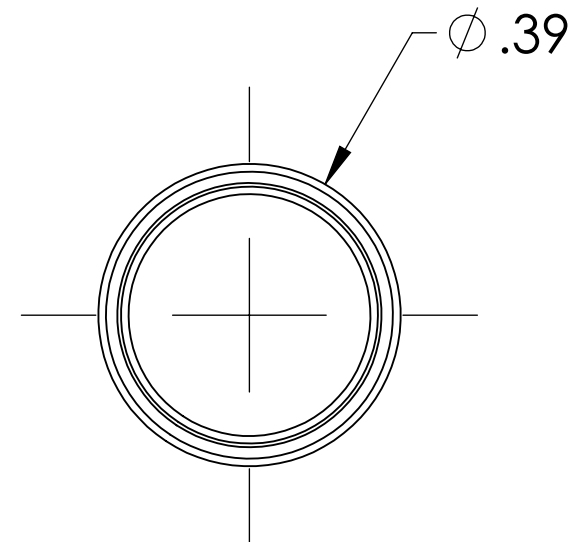


MPF PRODUCTS INC.

FIBER CONSTRUCTION

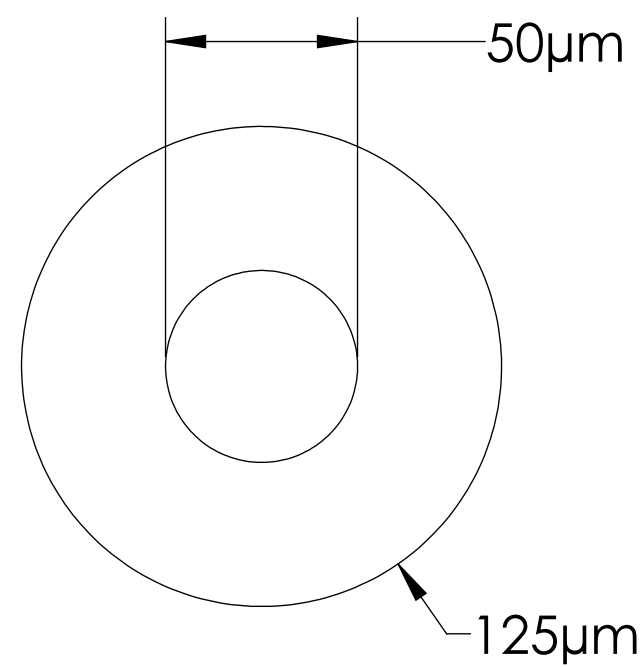

MM50 FC/APC NOTES:

1. WAVELENGTH: ca. 850 1300nm
2. NUMERICAL APERTURE: 0.2
3. TYPICAL INSERTION LOSS: <0.5 dB @ 1300nm
4. FERRULE: 2.5mm CERAMICS (ZrO2)

Multimode (MM50) Fiber Optic Feedthrough, FC/APC Connector

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.	
TOLERANCES:		DRAWN	9/11/2015		
ANGULAR: MACH ± 1/2°		CHECKED	9/11/2015		
TWO PLACE DECIMAL ± .030		ENG APPR.	9/11/2015		
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		TITLE: MULTIMODE FIBER OPTIC FEEDTHROUGH (FIBER MM50)	
MATERIAL					
FINISH		APPLICATION NEXT ASSY USED ON			
PLATING		SURFACE FINISH: 63/ OR BETTER		DWG. NO. REV.	
		UNLESS OTHERWISE SPECIFIED:		DOWNLOAD FROM MPFPI.COM A14871-1-W	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Friday, September 11, 2020 3:38:37 PM	