
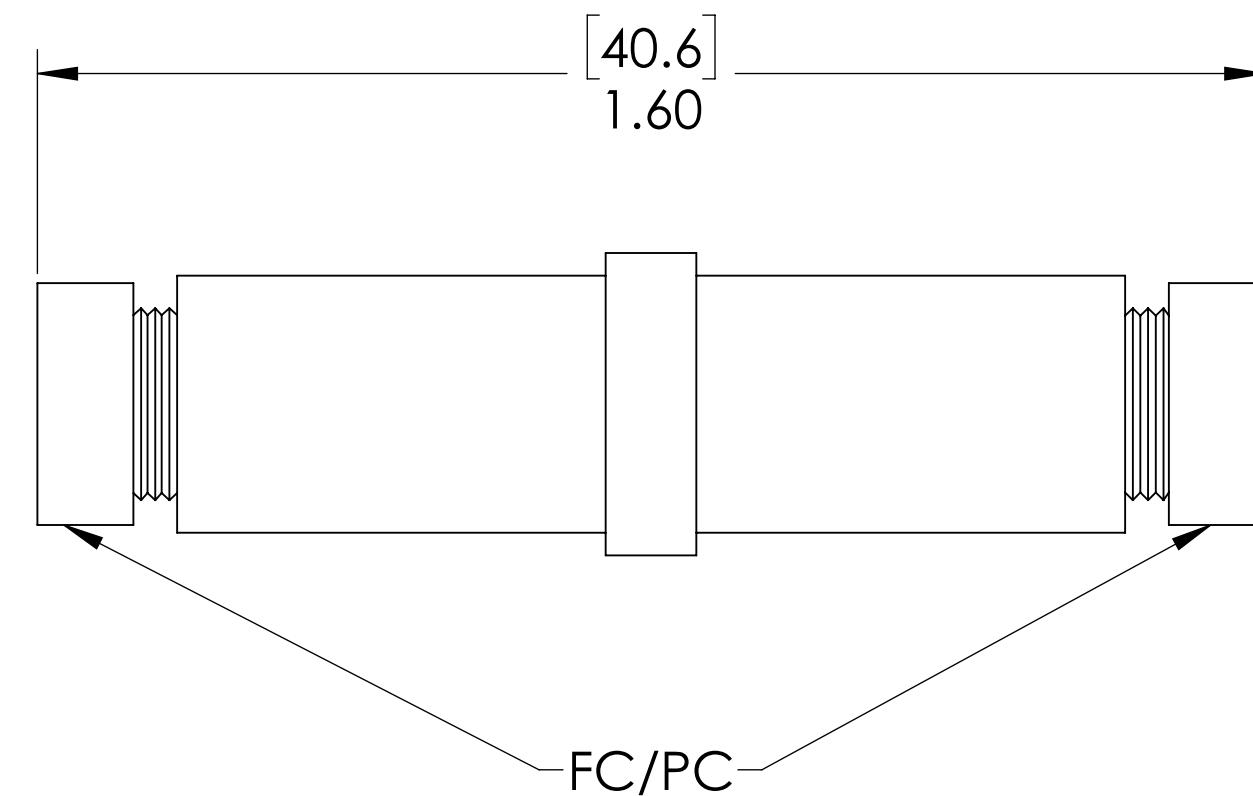


MPF PRODUCTS INC.

FIBER CONSTRUCTION

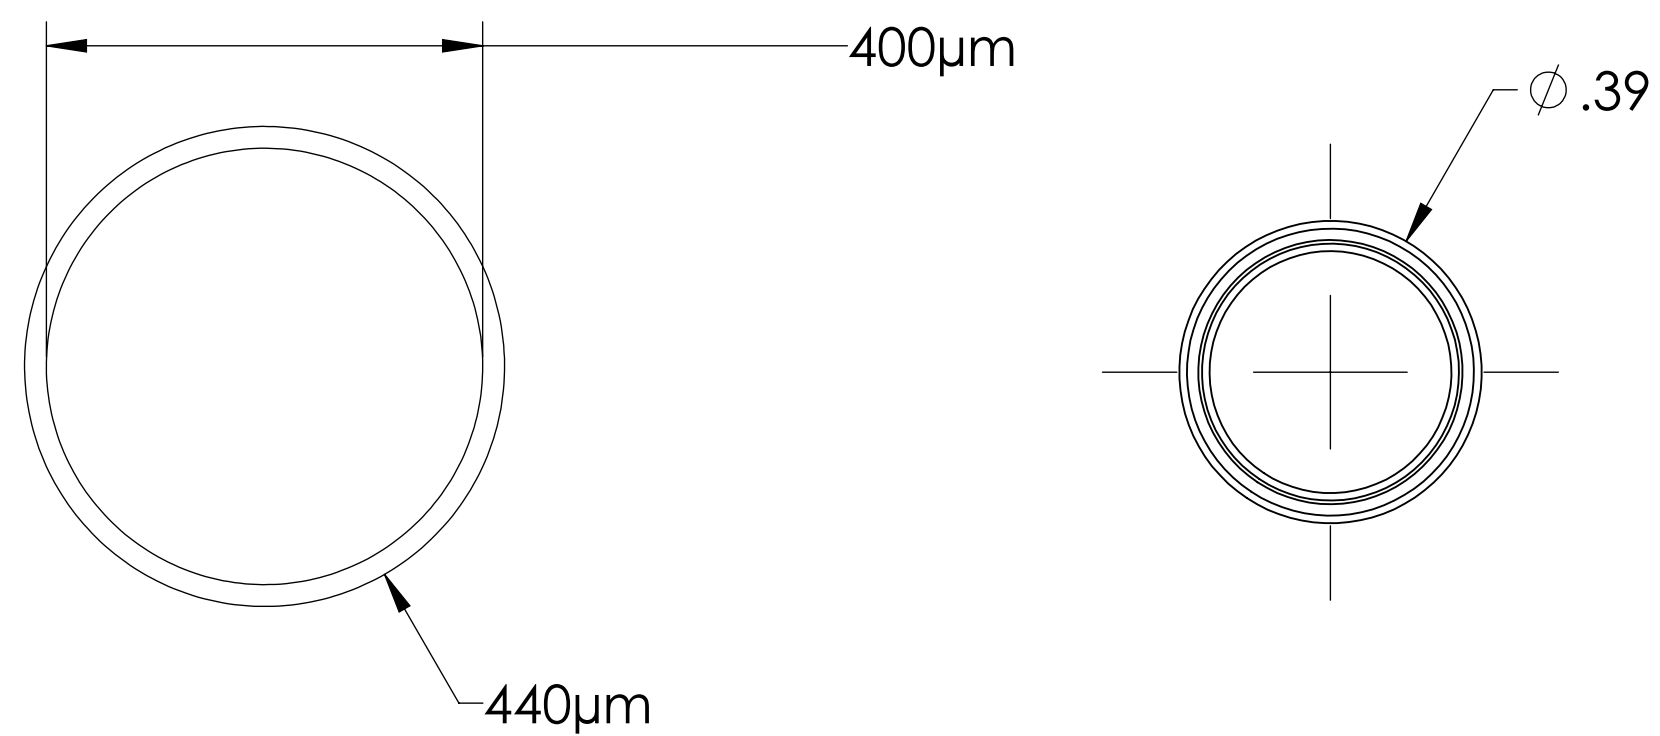

MM400 UV FC/PC NOTES:

1. WAVELENGTH: 190 TO 1100nm
2. NUMERICAL APERTURE: 0.22
3. TYPICAL INSERTION LOSS: < 0.5 dB @ 850nm
4. FERRULE: 2.5mm CERAMICS (ZrO₂)

Multimode (MM400) UV Fiber Optic Feedthrough, FC/PC Connector

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A					
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE				
ANGULAR: MACH ± 1/2°	WJ	WJ	9/11/2015				
TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015				
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ	9/11/2015				
MATERIAL	THIRD ANGLE:						
FINISH	APPLICATION	<table border="1"> <tr> <th>NEXT ASSY</th> <th>USED ON</th> </tr> <tr> <td></td> <td></td> </tr> </table>		NEXT ASSY	USED ON		
NEXT ASSY	USED ON						
PLATING	SURFACE FINISH:	63/ OR BETTER					
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
	TITLE:	MPF PRODUCTS INC. MULTIMODE FIBER OPTIC FEEDTHROUGH (FIBER MM400)					
	DOWNLOADED FROM MPFPI.COM						
	DWG. NO.	A14873-1-W	REV				
	Friday, September 11, 2020 3:38:10 PM						