
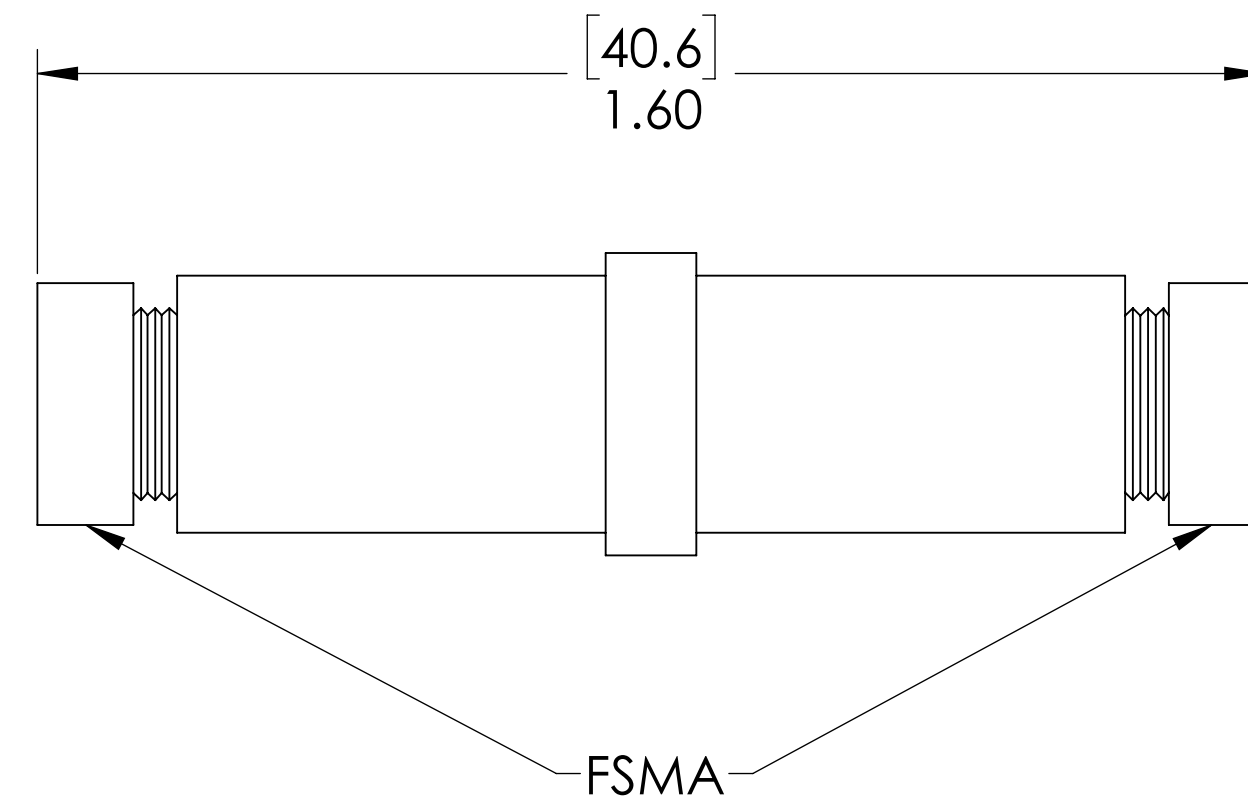


MPF PRODUCTS INC.

FIBER CONSTRUCTION

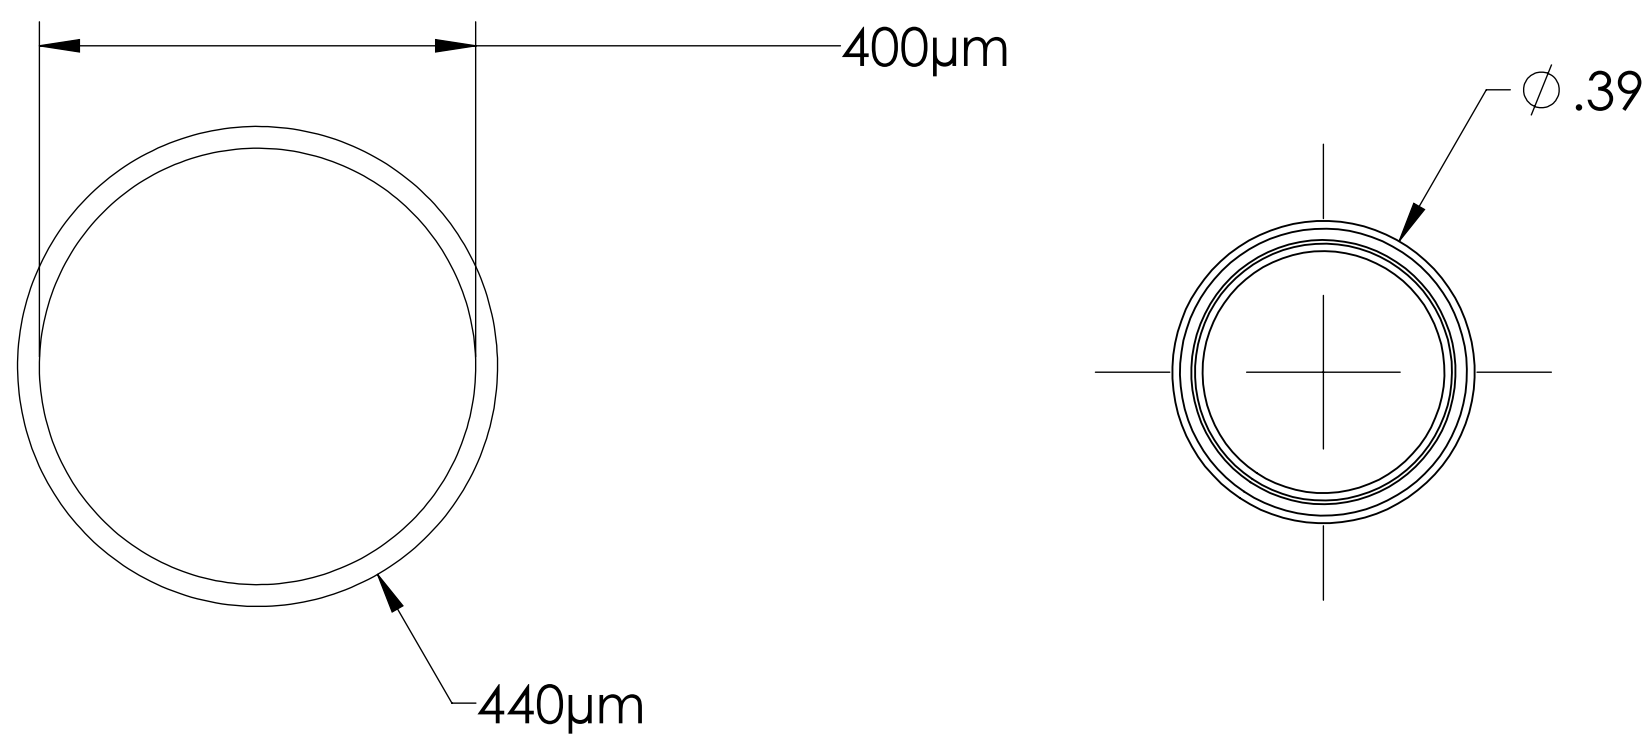

MM400 IR FSMA NOTES:

1. WAVELENGTH: 400 TO 2400nm
2. NUMERICAL APERTURE: 0.22
3. TYPICAL INSERTION LOSS: <1.2 dB
4. FERRULE: 2.5mm CERAMICS (ZrO2)

Multimode (MM400) IR Fiber Optic Feedthrough, FSMA Connector

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
FINISH	APPLICATION	
PLATING	NEXT ASSY	USED ON
	SURFACE FINISH:	63/ OR BETTER
	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	
	REMOVE ALL BURRS AND SHARP EDGES	
	TITLE:	MPF PRODUCTS INC.
		MULTIMODE FIBER OPTIC FEEDTHROUGH (FIBER MM400)
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A14873-65-W
	REV	
	Friday, September 11, 2020 3:37:29 PM	