
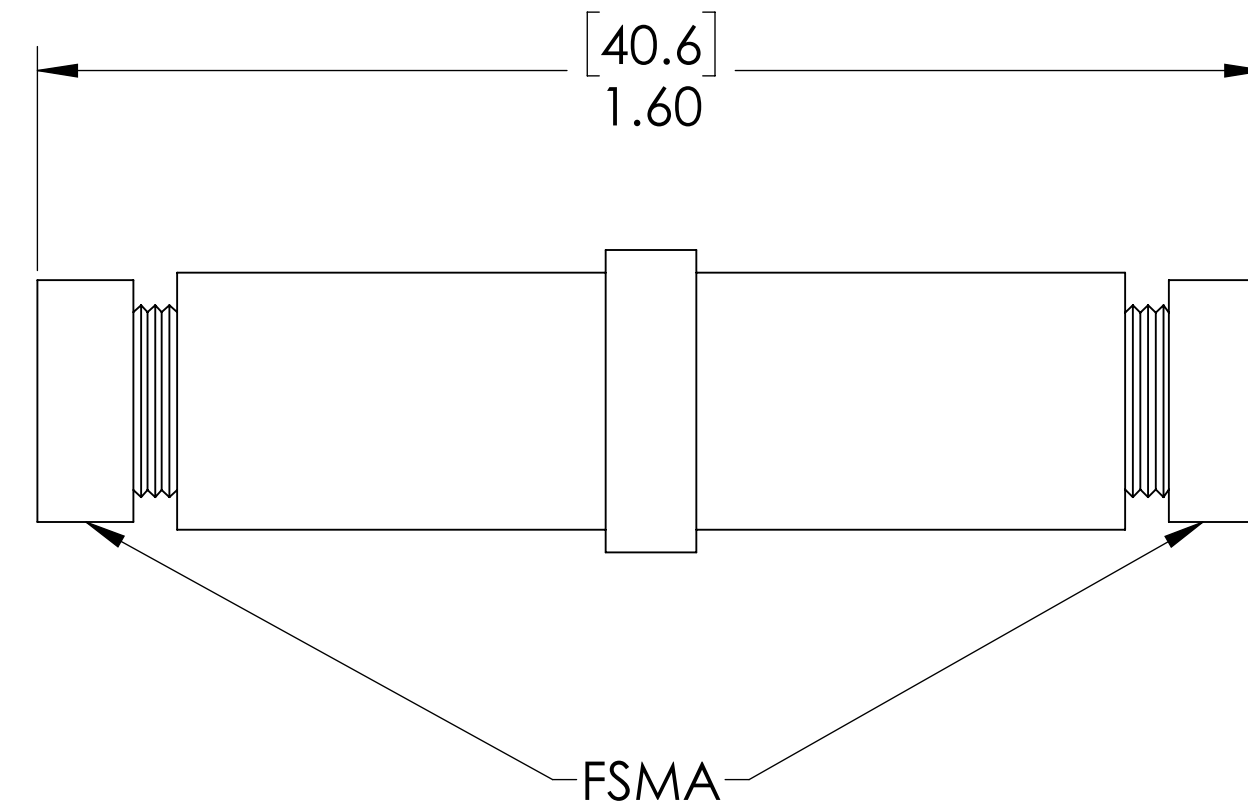


# MPF PRODUCTS INC.

## FIBER CONSTRUCTION

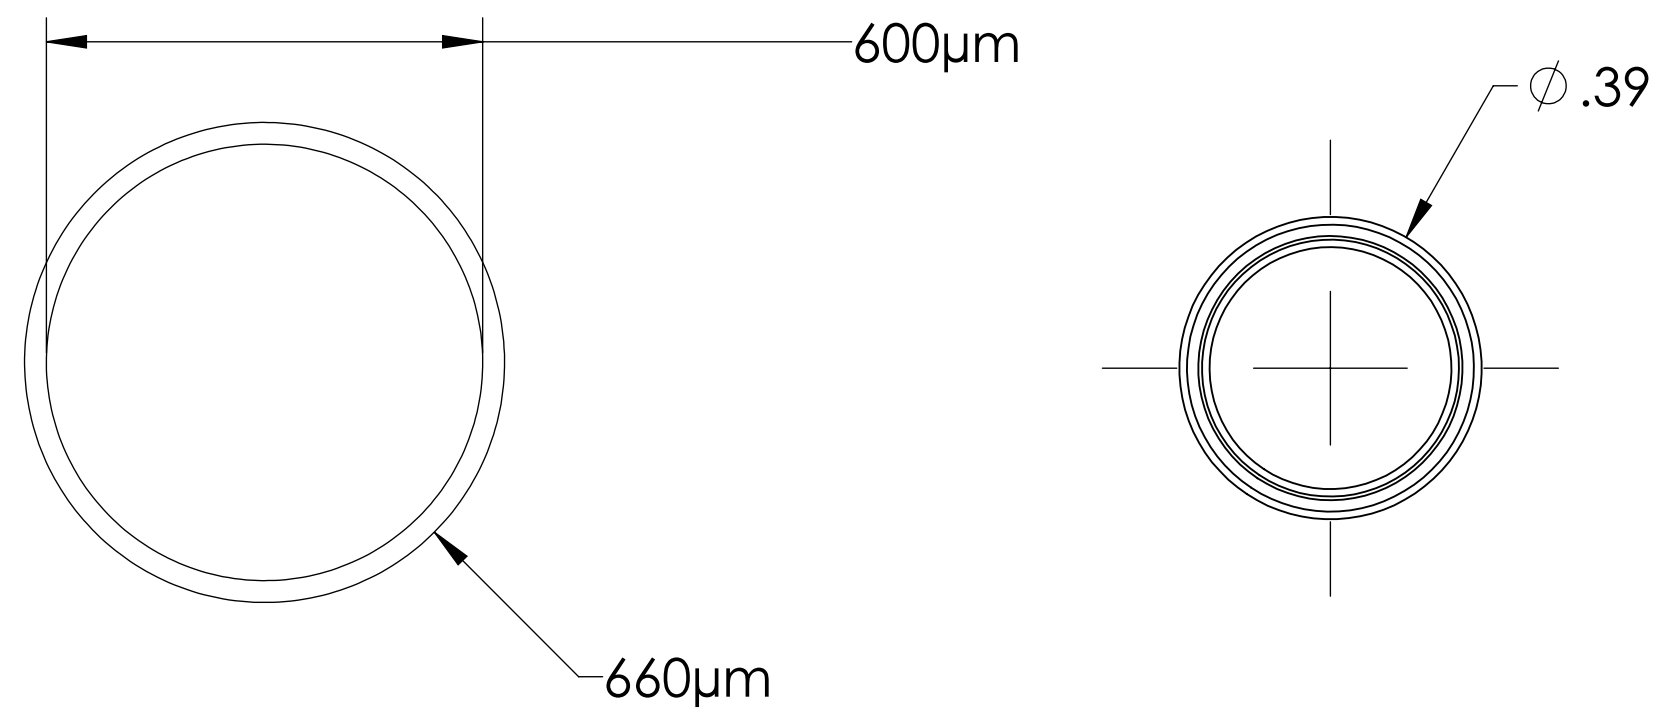

### MM600 IR FSMA NOTES:

1. WAVELENGTH RANGE: 400 TO 2400nm
2. NUMERICAL APERTURE: 0.22
3. TYPICAL INSERTION LOSS: <1.2 dB
4. FERRULE: 2.5mm CERAMICS (ZrO2)

### Multimode (MM600) IR Fiber Optic Feedthrough, FSMA Connector

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	<b>MPF PRODUCTS INC.</b>
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	9/11/2015	
MATERIAL	THIRD ANGLE:		TITLE: <b>MULTIMODE FIBER OPTIC FEEDTHROUGH (FIBER MM600)</b>
FINISH	APPLICATION		DOWNLOADED FROM MPFPI.COM
PLATING	NEXT ASSY		DWG. NO.
	SURFACE FINISH: 63/ OR BETTER		<b>A14878-19-W</b>
	UNLESS OTHERWISE SPECIFIED:		REV.
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Friday, July 26, 2019 10:38:36 AM